



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint®_rate2006 = 81.6</b>
ASERVER 442 S3 (Opteron 8350)	<b>SPECint_rate_base2006 = 73.0</b>

CPU2006 license: 9008


Test sponsor: ACTION S.A.

Tested by: Krzysztof Gierczyk

Test date: Aug-2008

Hardware Availability: Jul-2008

Software Availability: Feb-2007

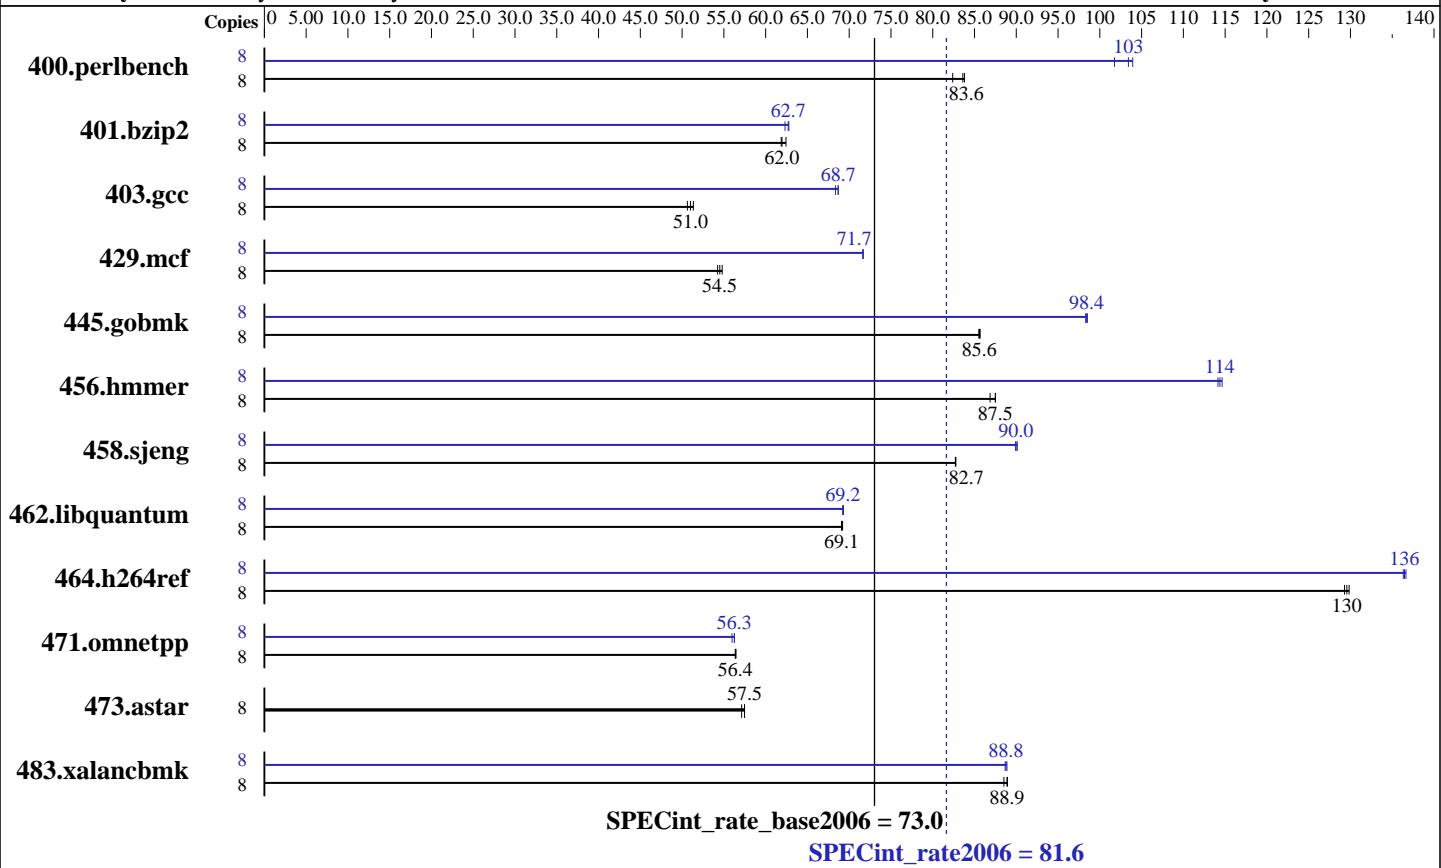

## Hardware

CPU Name:	AMD Opteron 8350
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2,4 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	512 KB I+D on chip per core
L3 Cache:	2 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (4x4GB, DDR2-667 CL5 ECC Reg Single Rank)
Disk Subsystem:	1 x 250 GB, SATA II, 7200rpm
Other Hardware:	None

## Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ReiserFS
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 8.0 32 bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	<b>SPECint_rate2006 = 81.6</b>
ASERVER 442 S3 (Opteron 8350)	<b>SPECint_rate_base2006 = 73.0</b>

CPU2006 license: 9008

Test date: Aug-2008

Test sponsor: ACTION S.A.

Hardware Availability: Jul-2008

Tested by: Krzysztof Gierczyk

Software Availability: Feb-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>935</b>	<b>83.6</b>	949	82.4	933	83.8	8	768	102	752	104	<b>756</b>	<b>103</b>
401.bzip2	8	1237	62.4	1248	61.9	<b>1246</b>	<b>62.0</b>	8	1239	62.3	<b>1231</b>	<b>62.7</b>	1230	62.8
403.gcc	8	1254	51.3	1272	50.6	<b>1263</b>	<b>51.0</b>	8	942	68.4	<b>938</b>	<b>68.7</b>	938	68.7
429.mcf	8	<b>1338</b>	<b>54.5</b>	1345	54.3	1331	54.8	8	1018	71.7	<b>1018</b>	<b>71.7</b>	1018	71.6
445.gobmk	8	<b>980</b>	<b>85.6</b>	981	85.5	980	85.7	8	854	98.3	<b>853</b>	<b>98.4</b>	852	98.5
456.hammer	8	<b>853</b>	<b>87.5</b>	859	86.9	853	87.5	8	651	115	654	114	<b>653</b>	<b>114</b>
458.sjeng	8	1170	82.7	<b>1170</b>	<b>82.7</b>	1170	82.8	8	1074	90.1	1077	89.9	<b>1076</b>	<b>90.0</b>
462.libquantum	8	2395	69.2	<b>2399</b>	<b>69.1</b>	2399	69.1	8	2391	69.3	2394	69.2	<b>2394</b>	<b>69.2</b>
464.h264ref	8	<b>1366</b>	<b>130</b>	1364	130	1369	129	8	<b>1297</b>	<b>136</b>	1296	137	1299	136
471.omnetpp	8	887	56.4	886	56.5	<b>887</b>	<b>56.4</b>	8	<b>889</b>	<b>56.3</b>	893	56.0	889	56.3
473.astar	8	983	57.1	<b>977</b>	<b>57.5</b>	977	57.5	8	983	57.1	<b>977</b>	<b>57.5</b>	977	57.5
483.xalancbmk	8	<b>621</b>	<b>88.9</b>	624	88.5	621	89.0	8	623	88.7	<b>622</b>	<b>88.8</b>	621	88.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind cores to processes

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A. ASERVER 442 S3 (Opteron 8350)	SPECint_rate2006 = 81.6 SPECint_rate_base2006 = 73.0
----------------------------------------------	---------------------------------------------------------

CPU2006 license: 9008

Test sponsor: ACTION S.A.

Tested by: Krzysztof Gierczyk

Test date: Aug-2008

Hardware Availability: Jul-2008

Software Availability: Feb-2007

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0  
401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint  
403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast  
429.mcf: -m32 -O3 -ipa  
-L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap  
445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.	SPECint_rate2006 = 81.6
ASERVER 442 S3 (Opteron 8350)	SPECint_rate_base2006 = 73.0
CPU2006 license: 9008	Test date: Aug-2008
Test sponsor: ACTION S.A.	Hardware Availability: Jul-2008
Tested by: Krzysztof Gierczyk	Software Availability: Feb-2007

## Peak Optimization Flags (Continued)

456.hmmer: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/cpu2006/mpaton/1.0/amd514K8.lib/32 -lsmartheap

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 19:39:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 September 2008.