



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

## SPECfp®\_rate2006 = 81.6

## IBM System x3550 (Intel Xeon X5470)

## SPECfp\_rate\_base2006 = 74.6

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

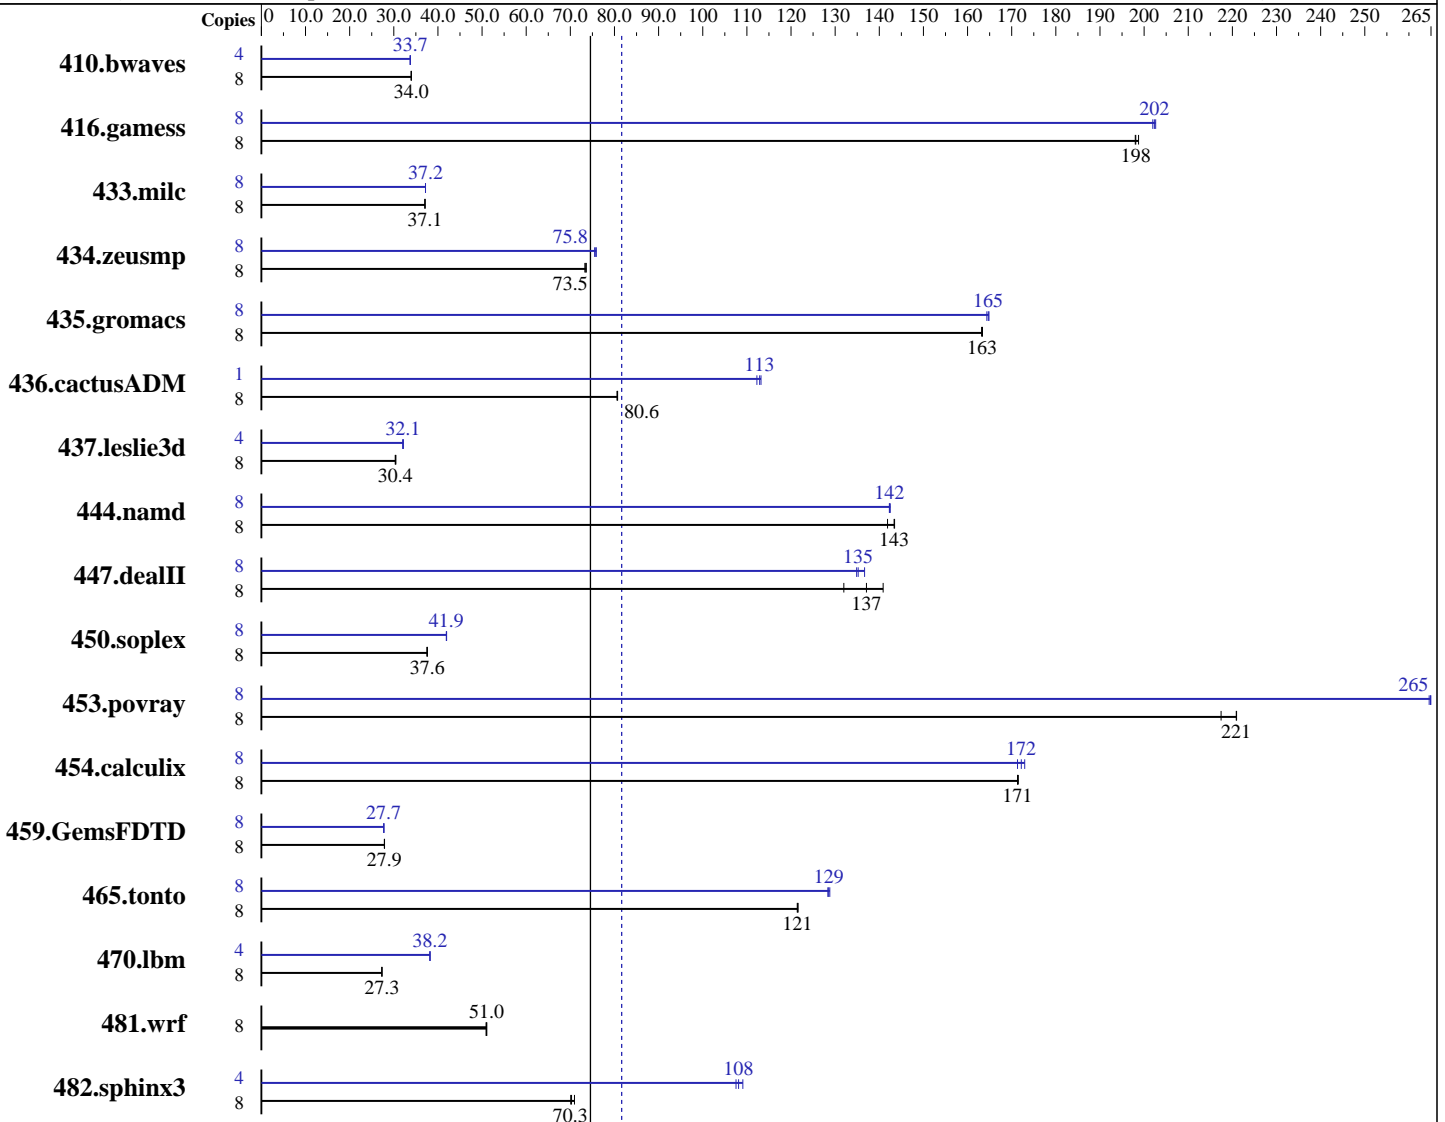

SPECfp\_rate2006 = 81.6

SPECfp\_rate\_base2006 = 74.6

### Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 1333MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 81.6

IBM System x3550 (Intel Xeon X5470)

SPECfp\_rate\_base2006 = 74.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)  
Disk Subsystem: 1 x 36 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	<b><u>3201</u></b>	<b><u>34.0</u></b>	3200	34.0	3203	33.9	4	1613	33.7	<b><u>1611</u></b>	<b><u>33.7</u></b>	1610	33.8
416.gamess	8	791	198	788	199	<b><u>791</u></b>	<b><u>198</u></b>	8	776	202	<b><u>774</u></b>	<b><u>202</u></b>	773	203
433.milc	8	<b><u>1981</u></b>	<b><u>37.1</u></b>	1981	37.1	1981	37.1	8	1975	37.2	1975	37.2	<b><u>1975</u></b>	<b><u>37.2</u></b>
434.zeusmp	8	993	73.3	<b><u>991</u></b>	<b><u>73.5</u></b>	989	73.6	8	<b><u>961</u></b>	<b><u>75.8</u></b>	964	75.5	959	75.9
435.gromacs	8	<b><u>350</u></b>	<b><u>163</u></b>	350	163	350	163	8	<b><u>347</u></b>	<b><u>165</u></b>	346	165	348	164
436.cactusADM	8	1186	80.6	<b><u>1185</u></b>	<b><u>80.6</u></b>	1184	80.7	1	<b><u>106</u></b>	<b><u>113</u></b>	106	113	106	112
437.leslie3d	8	2467	30.5	2478	30.3	<b><u>2477</u></b>	<b><u>30.4</u></b>	4	1169	32.2	1174	32.0	<b><u>1172</u></b>	<b><u>32.1</u></b>
444.namd	8	447	143	452	142	<b><u>448</u></b>	<b><u>143</u></b>	8	451	142	450	142	<b><u>451</u></b>	<b><u>142</u></b>
447.dealII	8	<b><u>668</u></b>	<b><u>137</u></b>	694	132	650	141	8	679	135	<b><u>677</u></b>	<b><u>135</u></b>	670	137
450.soplex	8	<b><u>1776</u></b>	<b><u>37.6</u></b>	1774	37.6	1778	37.5	8	<b><u>1591</u></b>	<b><u>41.9</u></b>	1592	41.9	1590	42.0
453.povray	8	196	217	<b><u>193</u></b>	<b><u>221</u></b>	193	221	8	161	265	161	265	<b><u>161</u></b>	<b><u>265</u></b>
454.calculix	8	385	172	<b><u>385</u></b>	<b><u>171</u></b>	385	171	8	<b><u>383</u></b>	<b><u>172</u></b>	382	173	385	171
459.GemsFDTD	8	3042	27.9	<b><u>3045</u></b>	<b><u>27.9</u></b>	3045	27.9	8	3059	27.7	3060	27.7	<b><u>3060</u></b>	<b><u>27.7</u></b>
465.tonto	8	648	121	<b><u>648</u></b>	<b><u>121</u></b>	647	122	8	611	129	613	128	<b><u>612</u></b>	<b><u>129</u></b>
470.lbm	8	4027	27.3	4024	27.3	<b><u>4025</u></b>	<b><u>27.3</u></b>	4	<b><u>1439</u></b>	<b><u>38.2</u></b>	1438	38.2	1439	38.2
481.wrf	8	<b><u>1752</u></b>	<b><u>51.0</u></b>	1755	50.9	1750	51.1	8	<b><u>1752</u></b>	<b><u>51.0</u></b>	1755	50.9	1750	51.1
482.sphinx3	8	2225	70.1	<b><u>2219</u></b>	<b><u>70.3</u></b>	2198	70.9	4	725	108	<b><u>721</u></b>	<b><u>108</u></b>	715	109

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except for 462.libquantum peak

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex and 482.sphinx3, at peak, are compiled in 32-bit mode  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M  
Hardware Prefetch Disabled, Adjacent Sector Prefetch Disabled  
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 81.6

IBM System x3550 (Intel Xeon X5470)

SPECfp\_rate\_base2006 = 74.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 81.6

IBM System x3550 (Intel Xeon X5470)

SPECfp\_rate\_base2006 = 74.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: /opt/intel/Compiler/11.0/042/bin/ia32/ifort  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 81.6

IBM System x3550 (Intel Xeon X5470)

SPECfp\_rate\_base2006 = 74.6

CPU2006 license: 11

Test date: Sep-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias -auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 81.6

IBM System x3550 (Intel Xeon X5470)

SPECfp\_rate\_base2006 = 74.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Sep-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.08.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.05.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.03.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090713.08.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.05.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 20:55:56 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.