



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 144

PowerEdge M600 (Intel Xeon X5460, 3.16 GHz)

SPECint\_rate\_base2006 = 131

CPU2006 license: 55


Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

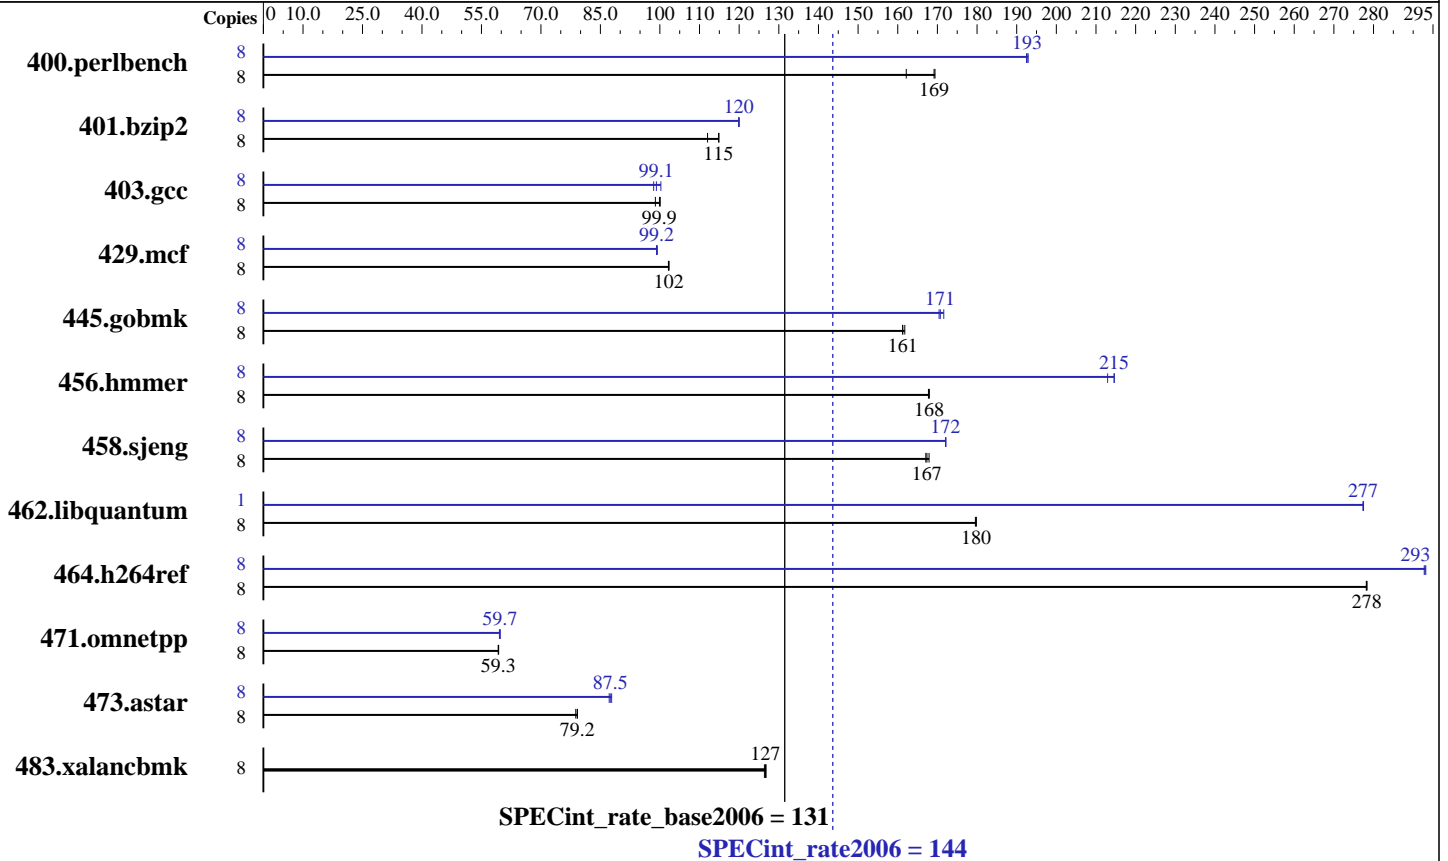

## Hardware

CPU Name: Intel Xeon X5460  
 CPU Characteristics:  
 CPU MHz: 3166  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8 x 2 GB 667 MHz ECC CL5 FB-DIMM)  
 Disk Subsystem: 1 x 80 GB 5400 RPM SATA  
 Other Hardware: None

## Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16-60.0.21-smp  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 144

PowerEdge M600 (Intel Xeon X5460, 3.16 GHz)

SPECint\_rate\_base2006 = 131

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2008  
Hardware Availability: Sep-2008  
Software Availability: Nov-2008

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	482	162	<b><u>462</u></b>	<b><u>169</u></b>	461	169	8	405	193	406	192	<b><u>406</u></b>	<b><u>193</u></b>
401.bzip2	8	672	115	689	112	<b><u>672</u></b>	<b><u>115</u></b>	8	644	120	<b><u>644</u></b>	<b><u>120</u></b>	643	120
403.gcc	8	<b><u>645</u></b>	<b><u>99.9</u></b>	643	100	651	98.9	8	654	98.4	642	100	<b><u>650</u></b>	<b><u>99.1</u></b>
429.mcf	8	713	102	714	102	<b><u>714</u></b>	<b><u>102</u></b>	8	<b><u>735</u></b>	<b><u>99.2</u></b>	736	99.2	734	99.4
445.gobmk	8	<b><u>520</u></b>	<b><u>161</u></b>	519	162	520	161	8	489	172	492	170	<b><u>492</u></b>	<b><u>171</u></b>
456.hmmer	8	444	168	<b><u>445</u></b>	<b><u>168</u></b>	445	168	8	348	215	<b><u>348</u></b>	<b><u>215</u></b>	351	213
458.sjeng	8	579	167	577	168	<b><u>578</u></b>	<b><u>167</u></b>	8	563	172	562	172	<b><u>563</u></b>	<b><u>172</u></b>
462.libquantum	8	922	180	<b><u>922</u></b>	<b><u>180</u></b>	923	180	1	<b><u>74.7</u></b>	<b><u>277</u></b>	74.7	277	74.7	277
464.h264ref	8	636	278	<b><u>636</u></b>	<b><u>278</u></b>	636	278	8	604	293	<b><u>604</u></b>	<b><u>293</u></b>	605	293
471.omnetpp	8	843	59.3	844	59.2	<b><u>844</u></b>	<b><u>59.3</u></b>	8	<b><u>838</u></b>	<b><u>59.7</u></b>	837	59.7	840	59.5
473.astar	8	713	78.8	<b><u>709</u></b>	<b><u>79.2</u></b>	709	79.2	8	644	87.2	639	87.8	<b><u>642</u></b>	<b><u>87.5</u></b>
483.xalancbmk	8	435	127	<b><u>436</u></b>	<b><u>127</u></b>	437	126	8	435	127	<b><u>436</u></b>	<b><u>127</u></b>	437	126

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Platform Notes

BIOS Settings:  
Adjacent Cache Line Prefetch = Disabled (Default = Enabled)

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode  
taskset was used to bind processes to cores except for 462.libquantum peak  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 144

PowerEdge M600 (Intel Xeon X5460, 3.16 GHz)

SPECint\_rate\_base2006 = 131

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2008  
Hardware Availability: Sep-2008  
Software Availability: Nov-2008

## Base Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch  
  
C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc  
  
401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include  
  
456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc  
-L/opt/intel/Compiler/11.0/042/ipp/em64t/lib  
-I/opt/intel/Compiler/11.0/042/ipp/em64t/include

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 144

PowerEdge M600 (Intel Xeon X5460, 3.16 GHz)

SPECint\_rate\_base2006 = 131

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch  
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -ansi-alias  
403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3  
429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch  
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias  
456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias  
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4  
462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -parallel -par-runtime-control  
-opt-prefetch  
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 144

PowerEdge M600 (Intel Xeon X5460, 3.16 GHz)

SPECint\_rate\_base2006 = 131

CPU2006 license: 55

Test date: Aug-2008

Test sponsor: Dell Inc.

Hardware Availability: Sep-2008

Tested by: Dell Inc.

Software Availability: Nov-2008

## Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.html>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.06.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090713.02.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090713.06.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 21:01:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 1 October 2008.