SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.

(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-940)

SPECint®2006 = 30.8

SPECint_base2006 = 27.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

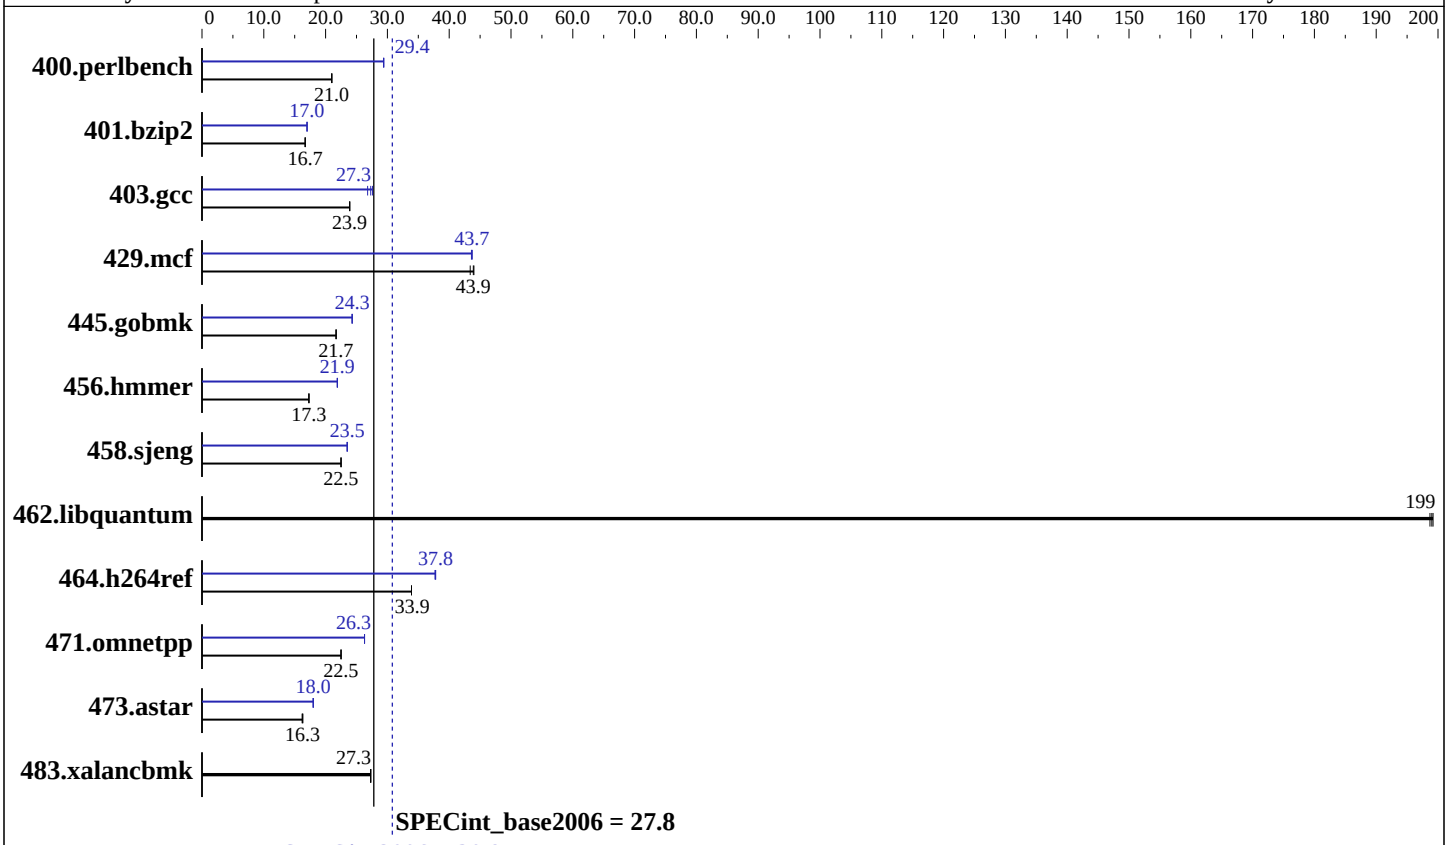

Hardware

CPU Name:	Intel Core i7-940
CPU Characteristics:	Intel Turbo Boost Technology up to 3.20 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
Disk Subsystem:	80 GB Intel X-25M SATA Solid-State Drive
Other Hardware:	None

Software

Operating System:	Windows Vista Ultimate w/ SP1 (64-bit)
Compiler:	Intel C++ Compiler Professional 11.0 for IA32 Build 20080930 Package ID: w_cproc_p_11.0.054 Microsoft Visual Studio 2008 (for libraries)
Auto Parallel:	Yes
File System:	NTFS
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None SmartHeap Library Version 8.1 from http://www.microquill.com/

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

Asus P6T Deluxe (Intel Core i7-940)

SPECint2006 = 30.8

SPECint_base2006 = 27.8

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	465	21.0	**465**	**21.0**	465	21.0	**333**	**29.4**	333	29.4	332	29.4
401.bzip2	**578**	**16.7**	578	16.7	578	16.7	**569**	**17.0**	568	17.0	569	17.0
403.gcc	337	23.9	**337**	**23.9**	337	23.9	**295**	**27.3**	292	27.6	301	26.8
429.mcf	210	43.4	207	44.0	**208**	**43.9**	**209**	**43.7**	209	43.6	209	43.7
445.gobmk	483	21.7	**483**	**21.7**	483	21.7	**431**	**24.3**	431	24.3	431	24.3
456.hmmer	538	17.3	**538**	**17.3**	538	17.3	426	21.9	427	21.9	**426**	**21.9**
458.sjeng	538	22.5	**538**	**22.5**	538	22.5	514	23.5	514	23.5	**514**	**23.5**
462.libquantum	104	199	**104**	**199**	104	199	104	199	**104**	**199**	104	199
464.h264ref	653	33.9	652	33.9	**652**	**33.9**	**586**	**37.8**	586	37.8	587	37.7
471.omnetpp	278	22.5	278	22.5	**278**	**22.5**	**238**	**26.3**	237	26.3	238	26.3
473.astar	**432**	**16.3**	432	16.3	433	16.2	390	18.0	390	18.0	**390**	**18.0**
483.xalancbmk	252	27.3	253	27.3	**253**	**27.3**	252	27.3	253	27.3	**253**	**27.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)
OMP_NUM_THREADS set to number of logical processors as seen by the OS
KMP_AFFINITY set to physical,0
```

Base Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Base Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Base Optimization Flags

C benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qpar-runtime-control -Qvec-guard-write /F512000000
```

C++ benchmarks:
```
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks:
```
icl -Qvc9 -Qc99
```

C++ benchmarks:
```
icl -Qvc9
```

Peak Portability Flags

403.gcc: `-DSPEC_CPU_WIN32`
464.h264ref: `-DSPEC_CPU_NO_INTTYPES -DWIN32`
483.xalancbmk: `-Qoption,cpp,--no_wchar_t_keyword`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch`
`/F512000000 shlw32m.lib            -link /FORCE:MULTIPLE`

401.bzip2: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias`
`/F512000000`

403.gcc: `-QxSSE4.2`(pass 2) `-Qprof_gen`(pass 1) `-Qprof_use`(pass 2)
`-Qipo -O3 -Qprec-div- /F512000000`

Continued on next page

Peak Optimization Flags (Continued)

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O2 -Qprec-div- -Qansi-alias /F512000000

456.hmmer: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll4 /F512000000

462.libquantum: basepeak = yes

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=block /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2) -Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-ra-region-strategy=routine /F512000000 shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html
http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml
http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:09:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2008.