



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 19.0

PowerEdge R905 (AMD Opteron 8380, 2.50 GHz)

SPECint\_base2006 = 15.8

CPU2006 license: 55


Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

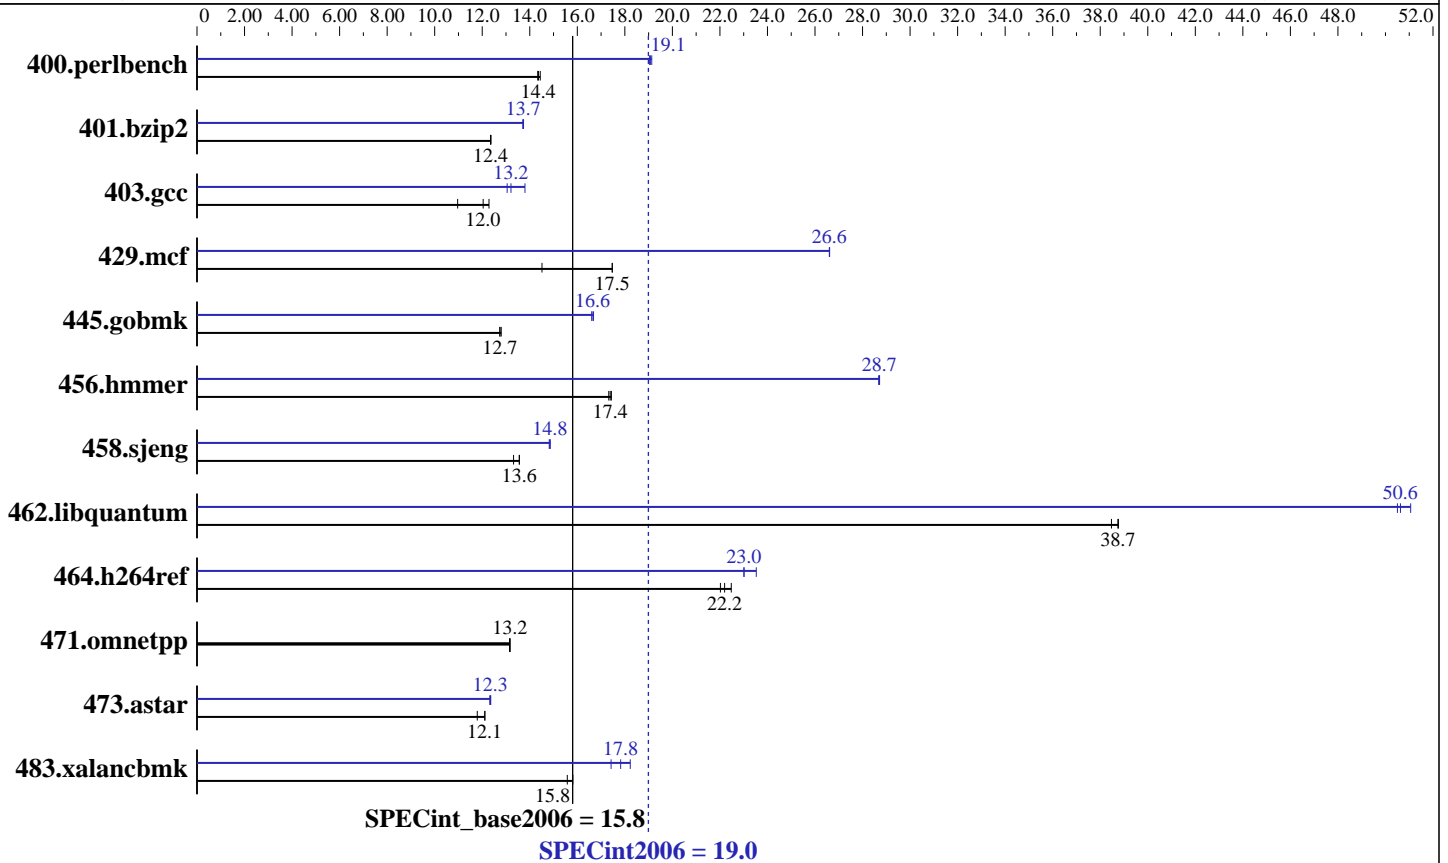

### Hardware

CPU Name: AMD Opteron 8380  
 CPU Characteristics:  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16 x 4 GB DDR2-800)  
 Disk Subsystem: 1 x 73 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.21-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 19.0

PowerEdge R905 (AMD Opteron 8380, 2.50 GHz)

SPECint\_base2006 = 15.8

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Nov-2008  
Hardware Availability: Nov-2008  
Software Availability: Oct-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	682	14.3	677	14.4	<b>680</b>	<b>14.4</b>	<u>512</u>	<u>19.1</u>	511	19.1	513	19.0
401.bzip2	781	12.4	<u>781</u>	<u>12.4</u>	781	12.3	<u>703</u>	<u>13.7</u>	702	13.7	704	13.7
403.gcc	<b>669</b>	<b>12.0</b>	734	11.0	655	12.3	617	13.0	<b>609</b>	<b>13.2</b>	583	13.8
429.mcf	522	17.5	<u>522</u>	<u>17.5</u>	628	14.5	343	26.6	<b>343</b>	<b>26.6</b>	343	26.6
445.gobmk	820	12.8	<b>823</b>	<b>12.7</b>	823	12.7	629	16.7	632	16.6	<b>631</b>	<b>16.6</b>
456.hammer	535	17.4	<u>537</u>	<u>17.4</u>	539	17.3	<u>325</u>	<u>28.7</u>	325	28.7	325	28.7
458.sjeng	892	13.6	<b>892</b>	<b>13.6</b>	909	13.3	<b>815</b>	<b>14.8</b>	814	14.9	817	14.8
462.libquantum	539	38.5	534	38.8	<b>535</b>	<b>38.7</b>	406	51.1	410	50.5	<b>409</b>	<b>50.6</b>
464.h264ref	<b>997</b>	<b>22.2</b>	1005	22.0	985	22.5	962	23.0	941	23.5	<b>962</b>	<b>23.0</b>
471.omnetpp	475	13.1	<u>475</u>	<u>13.2</u>	475	13.2	475	13.1	<u>475</u>	<u>13.2</u>	475	13.2
473.astar	595	11.8	<b>580</b>	<b>12.1</b>	580	12.1	<b>569</b>	<b>12.3</b>	568	12.4	570	12.3
483.xalancbmk	443	15.6	<u>437</u>	<u>15.8</u>	436	15.8	<u>387</u>	<u>17.8</u>	379	18.2	396	17.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores

## Operating System Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=14336 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"  
LD\_LIBRARY\_PATH = "/root/cpu2006-1.1/amd909gh-libs/64:/root/cpu2006-1.1/amd909gh-libs/32"



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 19.0

PowerEdge R905 (AMD Opteron 8380, 2.50 GHz)

SPECint\_base2006 = 15.8

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:  
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:  
-Mipa=jobs:4

C++ benchmarks:  
-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):  
pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 19.0

PowerEdge R905 (AMD Opteron 8380, 2.50 GHz)

SPECint\_base2006 = 15.8

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmcr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
 -IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
 -CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
 -OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
 -m3dnow  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
 -L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
 -LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
 -CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
 -L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 19.0

PowerEdge R905 (AMD Opteron 8380, 2.50 GHz)

SPECint\_base2006 = 15.8

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
 -LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
 -tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
 -LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
 -LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
 -OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
 -Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
 -Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
 -Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2)  
 -Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
 -L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
 -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
 -CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
 -O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
 --zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
 -L/root/work/libraries/SmartHeap\_8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 19.0

PowerEdge R905 (AMD Opteron 8380, 2.50 GHz)

SPECint\_base2006 = 15.8

CPU2006 license: 55

Test date: Nov-2008

Test sponsor: Dell Inc.

Hardware Availability: Nov-2008

Tested by: Dell Inc.

Software Availability: Oct-2008

## Peak Other Flags (Continued)

456.hmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.html](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.html)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi72\\_linux\\_flags.20090713.xml](http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.xml)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 21:10:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 9 December 2008.