SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

Fujitsu SPARC Enterprise M3000

SPECfp®_rate2006 = 25.6

SPECfp_rate_base2006 = 24.4

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Fujitsu Limited

Test date: Sep-2008
Hardware Availability: Nov-2008
Software Availability: Oct-2008

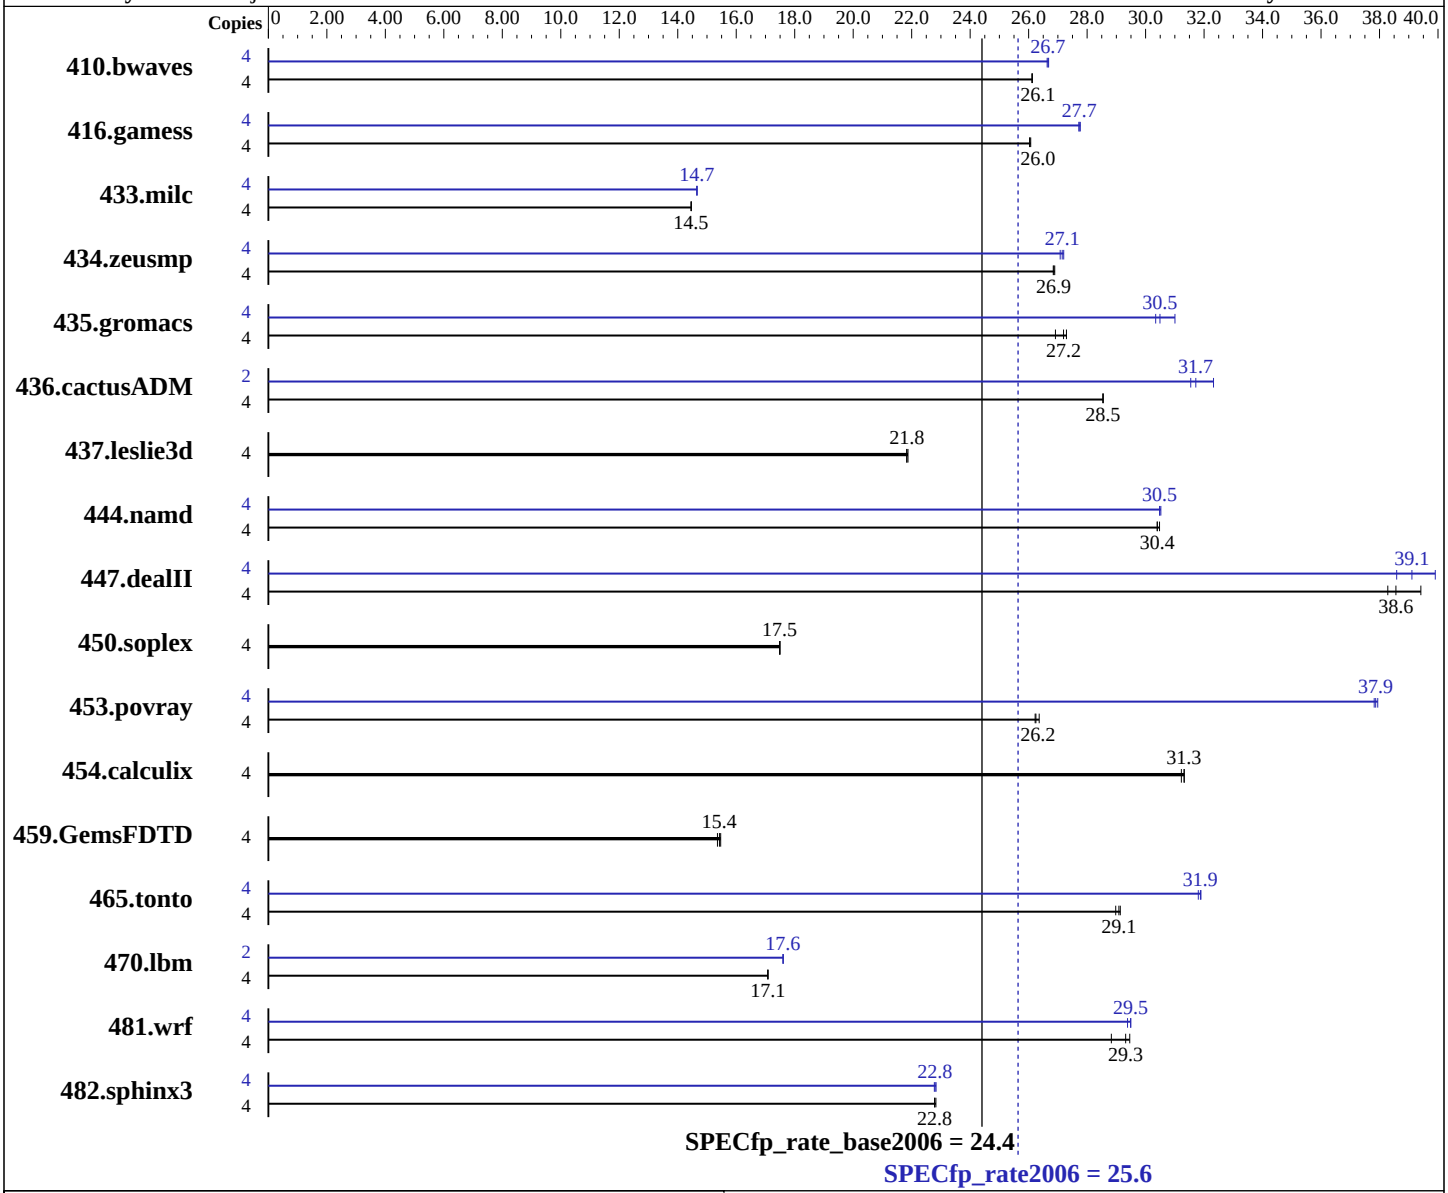

Hardware

CPU Name:	SPARC64 VII
CPU Characteristics:	2 Cores
CPU MHz:	2520
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip

Continued on next page

Software

Operating System:	Solaris 10 10/08
Compiler:	Sun Studio 12 with patches 124861-08, 124863-06, 124867-07, 127143-03, 127000-05, 127001-01 (see patch information below)
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Limited

Fujitsu SPARC Enterprise M3000

SPECfp_rate2006 = 25.6

SPECfp_rate_base2006 = 24.4

CPU2006 license: 19
Test sponsor: Fujitsu Limited
Tested by: Fujitsu Limited

Test date: Sep-2008
Hardware Availability: Nov-2008
Software Availability: Oct-2008

L3 Cache: None
Other Cache: None
Memory: 16 GB (2 GB x 8), 2-way interleaved
Disk Subsystem: 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
Other Hardware: None

Peak Pointers: 32-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	**2081**	**26.1**	2081	26.1	2081	26.1	4	2041	26.6	2037	26.7	**2039**	**26.7**
416.gamess	4	**3008**	**26.0**	3008	26.0	3004	26.1	4	**2824**	**27.7**	2821	27.8	2826	27.7
433.milc	4	2540	14.5	2539	14.5	**2540**	**14.5**	4	**2506**	**14.7**	2504	14.7	2506	14.7
434.zeusmp	4	1354	26.9	**1355**	**26.9**	1356	26.8	4	1338	27.2	**1341**	**27.1**	1344	27.1
435.gromacs	4	1061	26.9	**1050**	**27.2**	1046	27.3	4	921	31.0	941	30.3	**937**	**30.5**
436.cactusADM	4	1674	28.5	**1675**	**28.5**	1675	28.5	2	758	31.5	**754**	**31.7**	739	32.3
437.leslie3d	4	**1722**	**21.8**	1719	21.9	1722	21.8	4	**1722**	**21.8**	1719	21.9	1722	21.8
444.namd	4	1053	30.5	**1055**	**30.4**	1055	30.4	4	1051	30.5	1052	30.5	**1052**	**30.5**
447.dealII	4	1195	38.3	1161	39.4	**1187**	**38.6**	4	1147	39.9	1186	38.6	**1170**	**39.1**
450.soplex	4	**1908**	**17.5**	1908	17.5	1907	17.5	4	**1908**	**17.5**	1908	17.5	1907	17.5
453.povray	4	812	26.2	807	26.4	**811**	**26.2**	4	563	37.8	**562**	**37.9**	561	37.9
454.calculix	4	1054	31.3	**1054**	**31.3**	1057	31.2	4	1054	31.3	**1054**	**31.3**	1057	31.2
459.GemsFDTD	4	2763	15.4	2744	15.5	**2751**	**15.4**	4	2763	15.4	2744	15.5	**2751**	**15.4**
465.tonto	4	**1353**	**29.1**	1351	29.1	1358	29.0	4	**1235**	**31.9**	1238	31.8	1234	31.9
470.lbm	4	3218	17.1	3216	17.1	**3217**	**17.1**	2	1561	17.6	1561	17.6	**1561**	**17.6**
481.wrf	4	1550	28.8	1517	29.5	**1524**	**29.3**	4	1521	29.4	**1515**	**29.5**	1515	29.5
482.sphinx3	4	**3421**	**22.8**	3415	22.8	3421	22.8	4	3423	22.8	**3419**	**22.8**	3414	22.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
Sun Studio compiler patches are available at
   http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp
```

Submit Notes

```
Processes were assigned to specific processors using 'pbind' commands.  The config
file option 'submit' was used, along with a list of processors in the 'BIND'
variable, to generate the pbind commands.  (For details, please see the config file.)
```

Operating System Notes

```
Shell Environments:
   Default setting.

System Tunables:
(/etc/system parameters)

   tune_t_fsflushr=10
      Controls how many seconds elapse between runs of the
      page flush daemon, fsflush.
   autoup=600
      Causes pages older than the listed number of seconds to
      be written by fsflush.
   bufhwm=3000
      Memory byte limit for caching I/O buffers.
   segmap_percent=1
      Set maximum percent memory for file system cache.

Other System Settings:

   The webconsole service was turned off using svcadm disable webconsole.
```

Platform Notes

```
Memory is 2-way interleaved by filling all slots with the same
capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server.
Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise
M3000 are electrically equivalent.
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90

Base Optimization Flags

C benchmarks:
`-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1 -xalias_level=std -xprefetch_auto_type=indirect_array_access`

C++ benchmarks:
`-library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1 -xalias_level=compatible`

Fortran benchmarks:
`-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1`

Benchmarks using both Fortran and C:
`-fast`(cc) `-fast`(f90) `-fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=1 -xalias_level=std -xprefetch_auto_type=indirect_array_access`

Base Other Flags

C benchmarks:
`-xjobs=4`

C++ benchmarks:
`-xjobs=4`

Fortran benchmarks:
`-xjobs=4`

Benchmarks using both Fortran and C:
`-xjobs=4`

Peak Compiler Invocation

C benchmarks:
`cc`

C++ benchmarks:
`CC`

Fortran benchmarks:
`f90`

Benchmarks using both Fortran and C:
`cc f90`

Peak Optimization Flags

C benchmarks:

433.milc: `-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2 -fsimple=1 -xprefetch_auto_type=indirect_array_access -W2,-Ainline:rs=400 -xalias_level=std`

470.lbm: `-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=3 -xvector -xarch=generic`

482.sphinx3: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -fma=fused -xipo=2 -xpagesize=4M -xinline= -xprefetch=no -xalias_level=strong -lfast -ll2amm`

C++ benchmarks:

444.namd: `-library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M -xdepend -xalias_level=compatible`

447.dealII: `-library=stlport4 -xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -fma=fused -xipo=2 -xpagesize=4M -xdepend -xalias_level=compatible -xrestrict -xprefetch_level=2 -xprefetch_auto_type=indirect_array_access`

450.soplex: `basepeak = yes`

453.povray: `-library=stlport4 -xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -fma=fused -xipo=2 -xpagesize=4M -xdepend -xalias_level=compatible`

Fortran benchmarks:

410.bwaves: `-fast -xipo=2 -xprefetch_level=2 -xprefetch_auto_type=indirect_array_access`

416.gamess: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -fma=fused -xipo=2 -xpagesize=4M`

434.zeusmp: `-fast -fma=fused -xipo=2 -xpagesize=4M -lmopt`

437.leslie3d: `basepeak = yes`

459.GemsFDTD: `basepeak = yes`

465.tonto: `-xprofile=collect:./feedback`(pass 1) `-xprofile=use:./feedback`(pass 2) `-fast -xipo=2 -lfast`

Benchmarks using both Fortran and C:

Continued on next page

Peak Optimization Flags (Continued)

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xipo=2 -xpagesize=4M -xinline= -xchip=generic
-fsimple=0

436.cactusADM: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=3 -xalias_level=std
-xprefetch_auto_type=indirect_array_access

454.calculix: basepeak = yes

481.wrf: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagesize=4M
-xprefetch_level=2 -xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access

Peak Other Flags

C benchmarks:
-xjobs=4

C++ benchmarks:
-xjobs=4

Fortran benchmarks:
-xjobs=4

Benchmarks using both Fortran and C:
-xjobs=4

The flags file that was used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.html

You can also download the XML flags source by saving the following link:
http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:28:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 December 2008.