



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECint®\_rate2006 = 27.9

## Sun SPARC Enterprise M3000

SPECint\_rate\_base2006 = 25.7

CPU2006 license: 6


Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Fujitsu Limited

Software Availability: Oct-2008

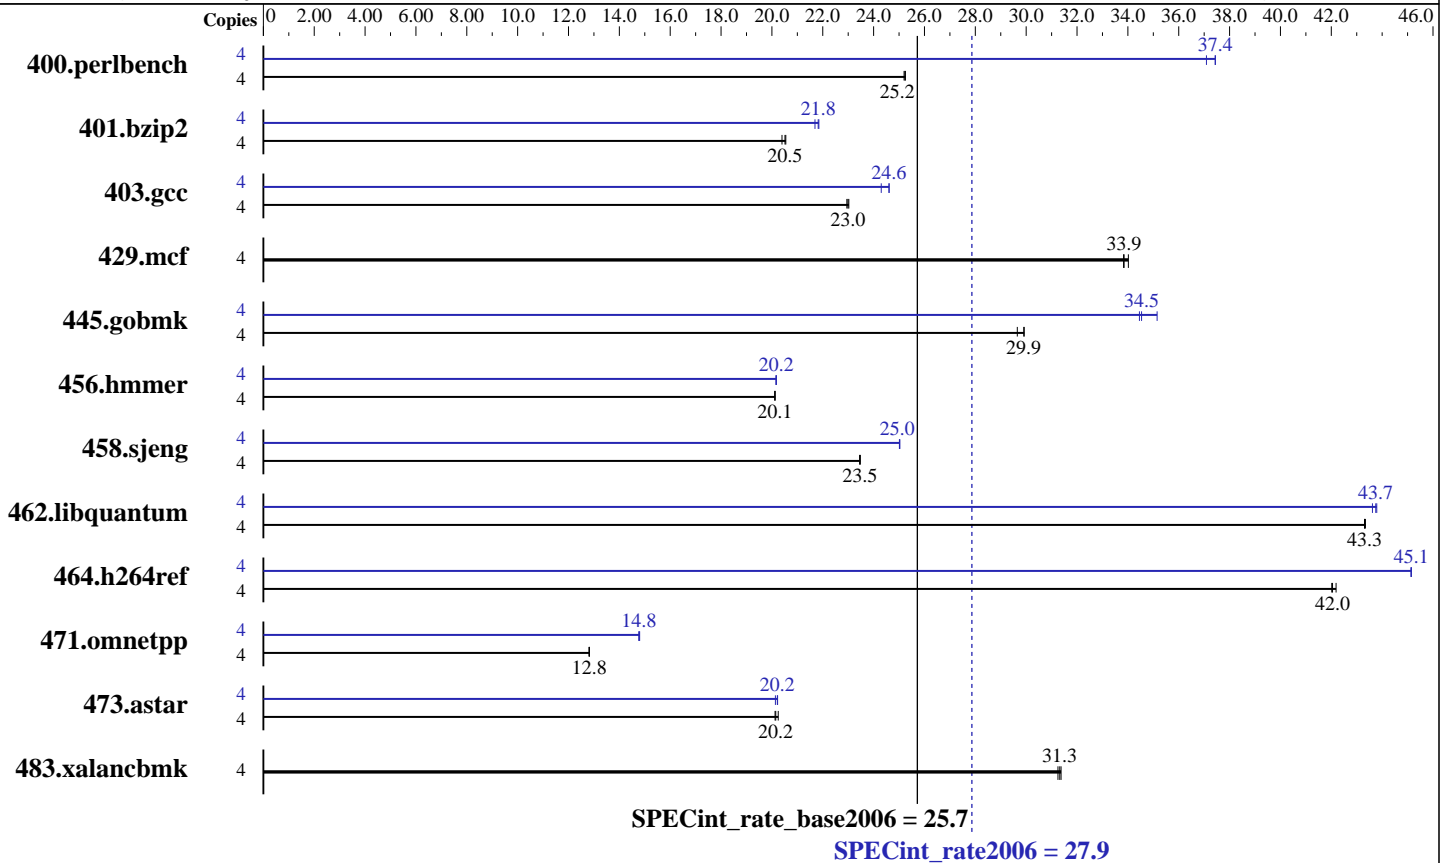

### Hardware

CPU Name: SPARC64 VII  
 CPU Characteristics: 2 Cores  
 CPU MHz: 2520  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 5 MB I+D on chip per chip  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (2 GB x 8), 2-way interleaved  
 Disk Subsystem: 73 GB 10,000 RPM Fujitsu MAY2073RC SAS  
 Other Hardware: None

### Software

Operating System: Solaris 10 10/08  
 Compiler: Sun Studio 12 with patches  
 124861-08, 124863-06, 124867-07  
 (see patch information below)  
 Auto Parallel: No  
 File System: ufs  
 System State: Default  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Sun Microsystems

SPECint\_rate2006 = 27.9

## Sun SPARC Enterprise M3000

SPECint\_rate\_base2006 = 25.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Jan-2009

Software Availability: Oct-2008

### Results Table

| Benchmark      | Base   |             |             |             |             |             |             | Peak   |             |             |             |             |             |             |
|----------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
|                | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       | Copies | Seconds     | Ratio       | Seconds     | Ratio       | Seconds     | Ratio       |
| 400.perlbench  | 4      | 1551        | 25.2        | 1548        | 25.3        | <u>1549</u> | <u>25.2</u> | 4      | 1054        | 37.1        | <u>1044</u> | <u>37.4</u> | 1044        | 37.4        |
| 401.bzip2      | 4      | <u>1882</u> | <u>20.5</u> | 1879        | 20.5        | 1892        | 20.4        | 4      | 1767        | 21.8        | <u>1769</u> | <u>21.8</u> | 1779        | 21.7        |
| 403.gcc        | 4      | <u>1401</u> | <u>23.0</u> | 1398        | 23.0        | 1403        | 22.9        | 4      | <u>1309</u> | <u>24.6</u> | 1308        | 24.6        | 1325        | 24.3        |
| 429.mcf        | 4      | 1078        | 33.8        | <u>1078</u> | <u>33.9</u> | 1072        | 34.0        | 4      | 1078        | 33.8        | <u>1078</u> | <u>33.9</u> | 1072        | 34.0        |
| 445.gobmk      | 4      | <u>1403</u> | <u>29.9</u> | 1415        | 29.7        | 1402        | 29.9        | 4      | 1194        | 35.1        | 1218        | 34.5        | <u>1215</u> | <u>34.5</u> |
| 456.hammer     | 4      | 1854        | 20.1        | <u>1855</u> | <u>20.1</u> | 1856        | 20.1        | 4      | 1850        | 20.2        | <u>1850</u> | <u>20.2</u> | 1851        | 20.2        |
| 458.sjeng      | 4      | 2062        | 23.5        | <u>2062</u> | <u>23.5</u> | 2064        | 23.4        | 4      | <u>1934</u> | <u>25.0</u> | 1935        | 25.0        | 1934        | 25.0        |
| 462.libquantum | 4      | 1914        | 43.3        | 1912        | 43.3        | <u>1914</u> | <u>43.3</u> | 4      | 1900        | 43.6        | 1893        | 43.8        | <u>1894</u> | <u>43.7</u> |
| 464.h264ref    | 4      | 2107        | 42.0        | 2098        | 42.2        | <u>2105</u> | <u>42.0</u> | 4      | 1961        | 45.1        | <u>1961</u> | <u>45.1</u> | 1961        | 45.1        |
| 471.omnetpp    | 4      | 1950        | 12.8        | <u>1950</u> | <u>12.8</u> | 1952        | 12.8        | 4      | 1689        | 14.8        | <u>1692</u> | <u>14.8</u> | 1693        | 14.8        |
| 473.astar      | 4      | <u>1393</u> | <u>20.2</u> | 1395        | 20.1        | 1387        | 20.2        | 4      | <u>1389</u> | <u>20.2</u> | 1388        | 20.2        | 1394        | 20.1        |
| 483.xalancbmk  | 4      | 880         | 31.4        | 883         | 31.2        | <u>881</u>  | <u>31.3</u> | 4      | 880         | 31.4        | 883         | 31.2        | <u>881</u>  | <u>31.3</u> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

### Compiler Invocation Notes

Sun Studio compiler patches are available at [http://developers.sun.com/sunstudio/downloads/patches/ss12\\_patches.jsp](http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp)

### Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

### Operating System Notes

Shell Environments:  
Default setting.

System Tunables:  
(/etc/system parameters)

```

tune_t_fsflushr=10
Controls how many seconds elapse between runs of the
page flush daemon, fsflush.
autoup=600
Causes pages older than the listed number of seconds to
be written by fsflush.
bufhwm=3000
Memory byte limit for caching I/O buffers.

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 27.9

Sun SPARC Enterprise M3000

SPECint\_rate\_base2006 = 25.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Jan-2009

Software Availability: Oct-2008

## Operating System Notes (Continued)

segmap\_percent=1

Set maximum percent memory for file system cache.

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

## Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server. Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=1

-xalias\_level=std -l12amm

C++ benchmarks:

-library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M

-xprefetch\_level=2 -xalias\_level=compatible -lfast



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 27.9

Sun SPARC Enterprise M3000

SPECint\_rate\_base2006 = 25.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Jan-2009

Software Availability: Oct-2008

## Base Other Flags

C benchmarks:  
-xjobs=4

C++ benchmarks:  
-xjobs=4

## Peak Compiler Invocation

C benchmarks:  
cc

C++ benchmarks:  
CC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC  
403.gcc: -DSPEC\_CPU\_SOLARIS  
462.libquantum: -DSPEC\_CPU\_SOLARIS  
483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xalias\_level=std -Xc -xrestrict  
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xalias\_level=std -xprefetch=no  
-l12amm

429.mcf: basepeak = yes

445.gobmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=std -xrestrict

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 27.9

Sun SPARC Enterprise M3000

SPECint\_rate\_base2006 = 25.7

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Fujitsu Limited

Software Availability: Oct-2008

## Peak Optimization Flags (Continued)

456.hmmcr: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2

458.sjeng: Same as 456.hmmcr

462.libquantum: -fast -fma=fused -xpagesize=4M -xipo=2 -xprefetch=no  
-lbsdmalloc

464.h264ref: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xalias\_level=std -m32  
-xarch=sparcvis2 -xprefetch=no -ll2amm

C++ benchmarks:

471.omnetpp: -library=stlport4 -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=compatible -xipo=2  
-xprefetch\_level=2 -Qoption cg -Qlp-av=0 -lfast

473.astar: -library=stlport4 -fast -fma=fused -xpagesize=4M  
-xalias\_level=compatible -xipo=2 -xprefetch\_level=2 -lfast

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

-xjobs=4

C++ benchmarks:

-xjobs=4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECint\_rate2006 = 27.9

Sun SPARC Enterprise M3000

SPECint\_rate\_base2006 = 25.7

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Jan-2009

Software Availability: Oct-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 23:13:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 February 2009.