SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint®2006 = 22.0

SPECint_base2006 = 19.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

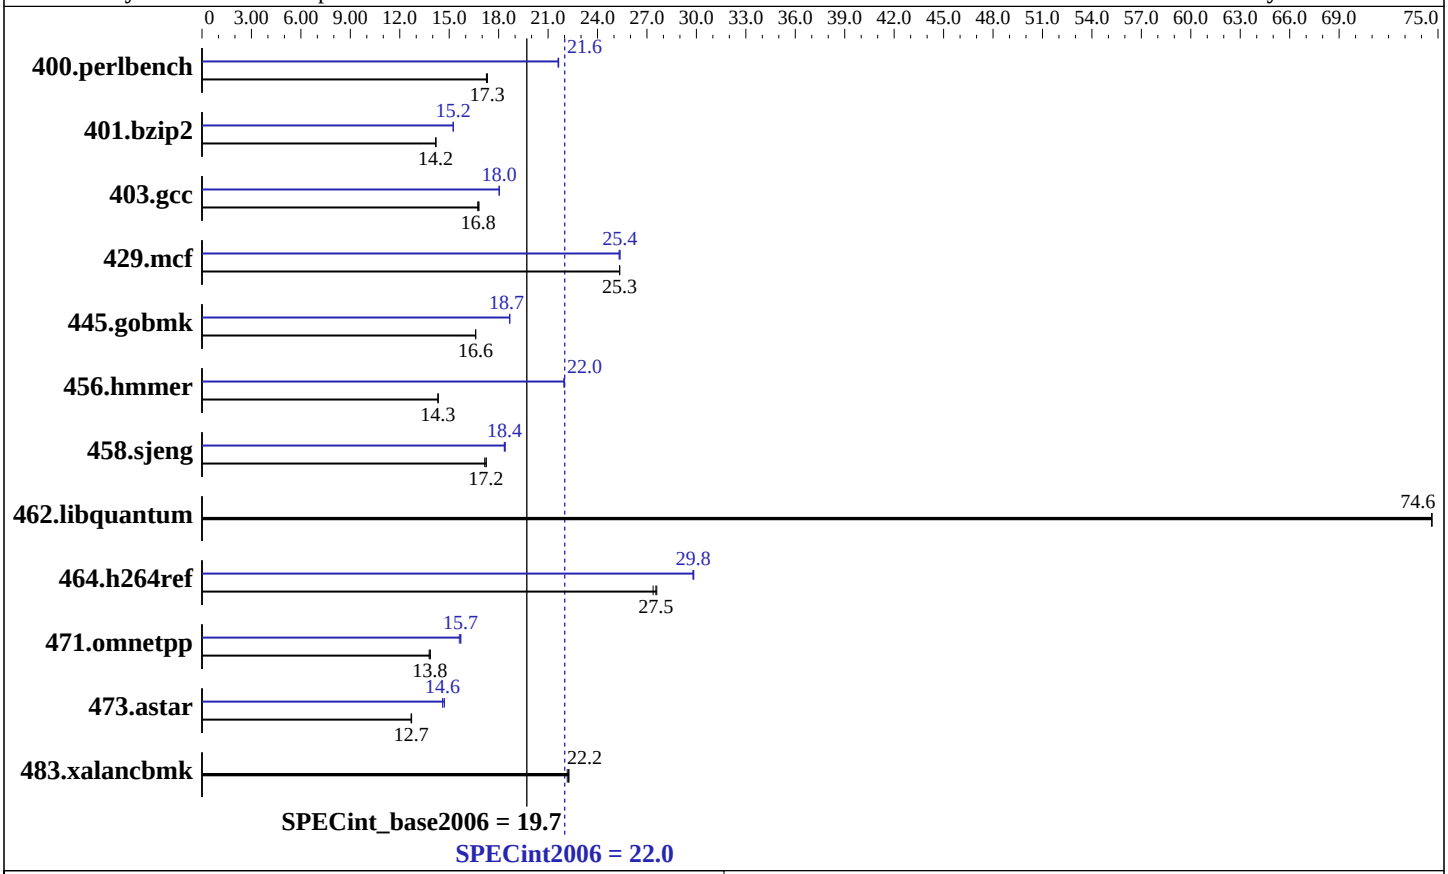

Hardware

CPU Name:	Intel Core 2 Duo T9400
CPU Characteristics:	1066 MHz system bus
CPU MHz:	2533
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	8 GB (4x2 GB PC2-5300P, 1 rank, CL5-5-5, ECC)
Disk Subsystem:	1x160 GB SATAII, 7200 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
Auto Parallel:	Yes
File System:	ext2
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/iR110a-1H
(Intel Core 2 Duo T9400)

SPECint2006 = 22.0

SPECint_base2006 = 19.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2009
Hardware Availability: Jan-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	564	17.3	566	17.3	**565**	**17.3**	**452**	**21.6**	451	21.6	452	21.6
401.bzip2	**680**	**14.2**	680	14.2	681	14.2	632	15.3	**633**	**15.2**	633	15.2
403.gcc	481	16.7	**480**	**16.8**	479	16.8	447	18.0	446	18.0	**446**	**18.0**
429.mcf	360	25.3	360	25.3	**360**	**25.3**	360	25.3	360	25.4	**360**	**25.4**
445.gobmk	632	16.6	632	16.6	**632**	**16.6**	562	18.7	562	18.7	**562**	**18.7**
456.hmmer	**651**	**14.3**	651	14.3	651	14.3	**424**	**22.0**	425	22.0	424	22.0
458.sjeng	702	17.2	705	17.2	**702**	**17.2**	657	18.4	660	18.3	**659**	**18.4**
462.libquantum	**278**	**74.6**	278	74.6	278	74.6	**278**	**74.6**	278	74.6	278	74.6
464.h264ref	808	27.4	**804**	**27.5**	802	27.6	742	29.8	743	29.8	**742**	**29.8**
471.omnetpp	451	13.9	453	13.8	**452**	**13.8**	400	15.6	**398**	**15.7**	398	15.7
473.astar	553	12.7	552	12.7	**553**	**12.7**	481	14.6	477	14.7	**480**	**14.6**
483.xalancbmk	**310**	**22.2**	310	22.3	311	22.2	**310**	**22.2**	310	22.3	311	22.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:            Enabled
Adjacent Cache Line Prefetch:   Enabled
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`

Continued on next page

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -ansi-alias -opt-prefetch`

401.bzip2: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3`

429.mcf: `-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch`

445.gobmk: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -O2 -ipo -no-prec-div -ansi-alias`

456.hmmer: `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32`

458.sjeng: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

473.astar: `-prof-gen`(pass 1) `-prof-use`(pass 2) `-xSSE4.1 -ipo -O3 -no-prec-div -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml
http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:30:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 March 2009.