SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECint®2006 = 14.6

SPECint_base2006 = 12.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

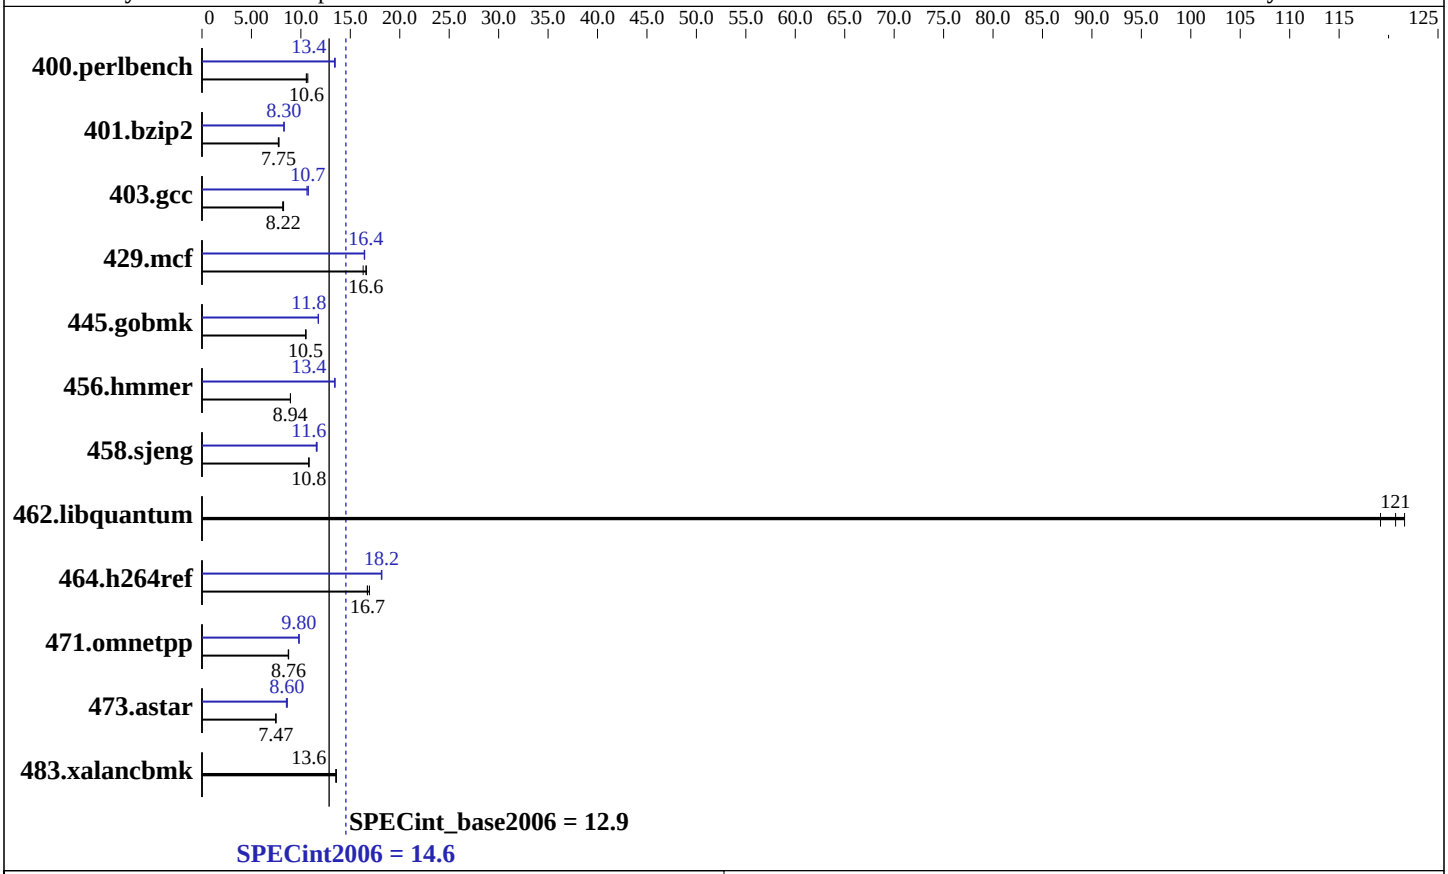

Hardware

CPU Name:	Intel Xeon E7310
CPU Characteristics:	1066 MHz system bus
CPU MHz:	1600
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	None
Other Cache:	None
Memory:	32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem:	1x146.5 GB SAS, 10000 RPM
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7310)

SPECint2006 = 14.6

SPECint_base2006 = 12.9

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: Feb-2009
Hardware Availability: Feb-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	926	10.5	**922**	**10.6**	913	10.7	729	13.4	**726**	**13.4**	726	13.5
401.bzip2	1239	7.79	**1245**	**7.75**	1250	7.72	1164	8.29	1162	8.30	**1163**	**8.30**
403.gcc	975	8.25	**979**	**8.22**	987	8.16	748	10.8	758	10.6	**751**	**10.7**
429.mcf	560	16.3	549	16.6	**550**	**16.6**	554	16.5	555	16.4	**555**	**16.4**
445.gobmk	**999**	**10.5**	999	10.5	1000	10.5	892	11.8	**892**	**11.8**	891	11.8
456.hmmer	**1043**	**8.94**	1043	8.95	1043	8.94	**695**	**13.4**	695	13.4	694	13.4
458.sjeng	**1119**	**10.8**	1120	10.8	1118	10.8	**1045**	**11.6**	1047	11.6	1039	11.6
462.libquantum	**172**	**121**	170	122	174	119	**172**	**121**	170	122	174	119
464.h264ref	1307	16.9	**1321**	**16.7**	1324	16.7	1217	18.2	**1218**	**18.2**	1220	18.1
471.omnetpp	**714**	**8.76**	714	8.76	717	8.72	638	9.80	**638**	**9.80**	637	9.81
473.astar	939	7.48	941	7.46	**940**	**7.47**	**816**	**8.60**	823	8.53	814	8.62
483.xalancbmk	508	13.6	**509**	**13.6**	510	13.5	508	13.6	**509**	**13.6**	510	13.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
```

Platform Notes

```
Bios settings:
Hardware Prefetcher:              Enabled
Adjacent Cache Line Prefetch:     Enabled
FSB High Bandwidth Optimization: Disabled
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:
-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page

Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml`
`http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 23:26:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 March 2009.