



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp[®]_rate2006 = 194

Sun Blade X6270 (Intel Xeon X5570 2.93GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

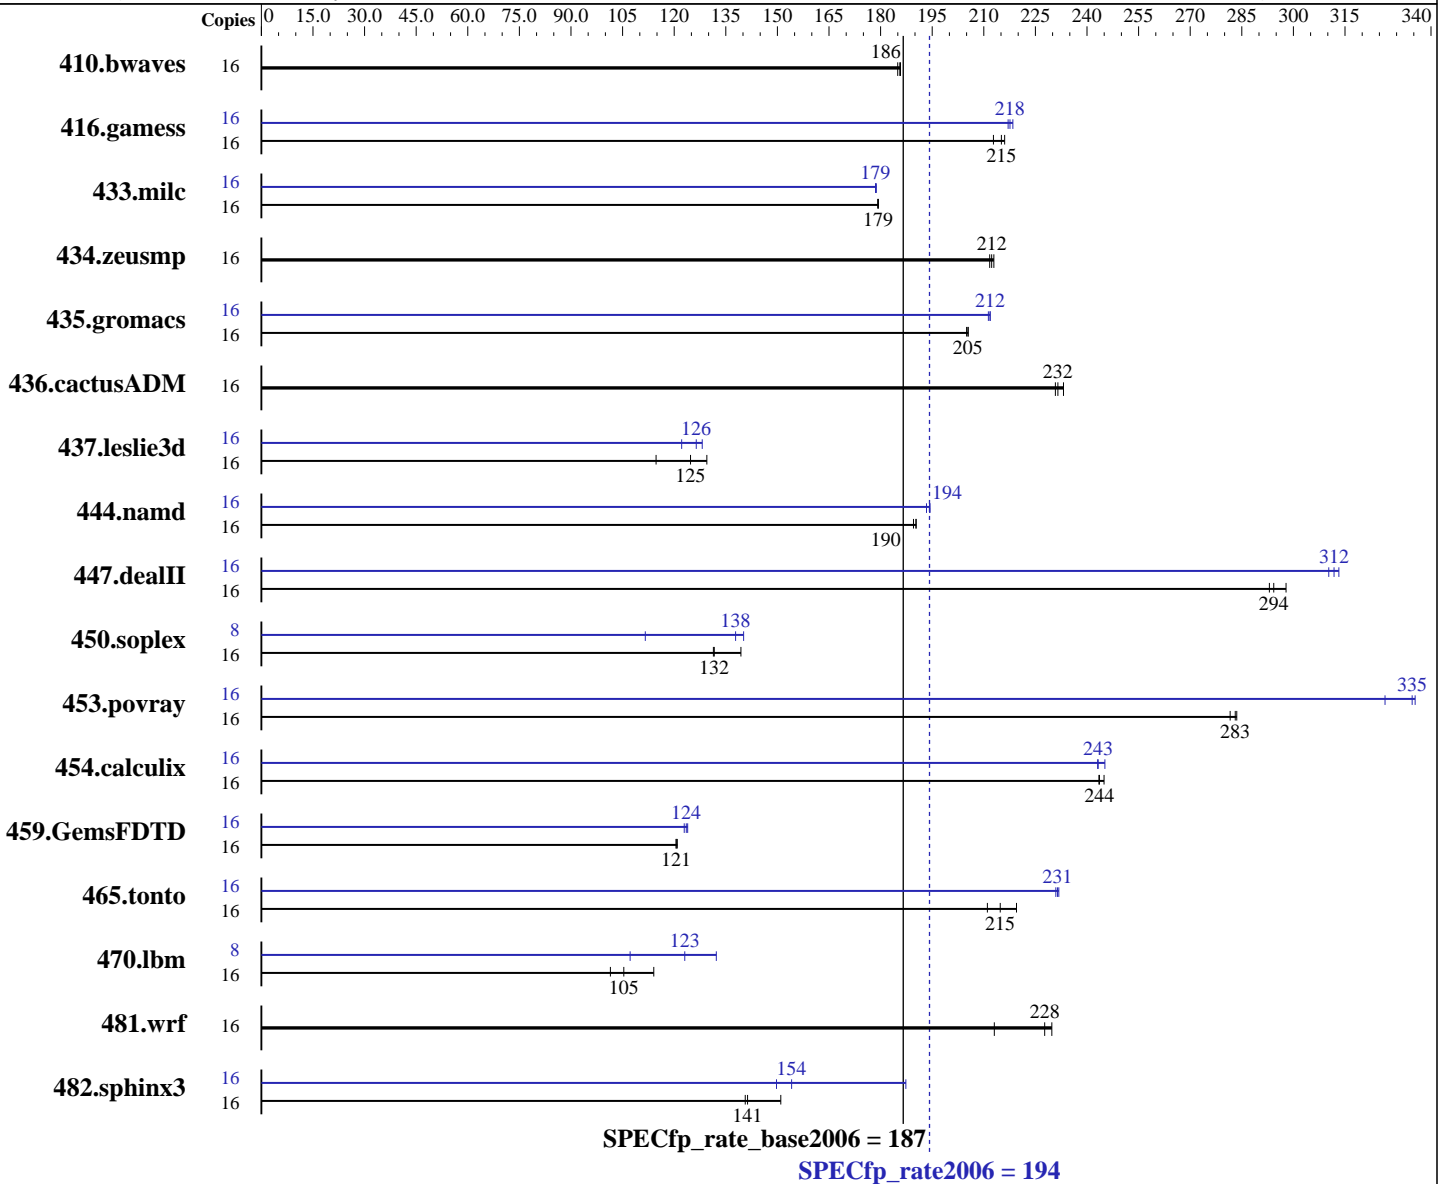

Hardware

CPU Name: Intel Xeon X5570
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 or 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSe Linux Enterprise Server 10 (x86_64) SP2, kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: L_cproc_p_11.0.066, L_cprof_p_11.0.066
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 194

Sun Blade X6270 (Intel Xeon X5570 2.93GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2009

Tested by: Sun Microsystems

Software Availability: Nov-2008

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB DDR3-1333)
 Disk Subsystem: 134 GB using 1x ST914602SSUN146GSAS
 SAS 10 K RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1175	185	1170	186	<u>1172</u>	<u>186</u>	16	1175	185	1170	186	<u>1172</u>	<u>186</u>
416.gamess	16	1450	216	1472	213	<u>1456</u>	<u>215</u>	16	1434	218	1443	217	<u>1440</u>	<u>218</u>
433.milc	16	819	179	<u>819</u>	<u>179</u>	820	179	16	<u>823</u>	<u>179</u>	822	179	823	179
434.zeusmp	16	684	213	688	212	<u>686</u>	<u>212</u>	16	684	213	688	212	<u>686</u>	<u>212</u>
435.gromacs	16	557	205	<u>556</u>	<u>205</u>	556	205	16	539	212	541	211	<u>539</u>	<u>212</u>
436.cactusADM	16	828	231	820	233	<u>826</u>	<u>232</u>	16	828	231	820	233	<u>826</u>	<u>232</u>
437.leslie3d	16	1161	129	1311	115	<u>1206</u>	<u>125</u>	16	1231	122	<u>1190</u>	<u>126</u>	1174	128
444.namd	16	677	190	674	190	<u>674</u>	<u>190</u>	16	664	193	<u>661</u>	<u>194</u>	660	194
447.dealII	16	625	293	<u>622</u>	<u>294</u>	615	298	16	<u>587</u>	<u>312</u>	584	313	590	310
450.soplex	16	1016	131	<u>1014</u>	<u>132</u>	957	139	8	598	112	<u>484</u>	<u>138</u>	476	140
453.povray	16	302	282	<u>301</u>	<u>283</u>	300	284	16	261	327	<u>254</u>	<u>335</u>	254	335
454.calculix	16	539	245	<u>542</u>	<u>244</u>	542	243	16	538	245	543	243	<u>543</u>	<u>243</u>
459.GemsFDTD	16	1404	121	<u>1408</u>	<u>121</u>	1408	121	16	1370	124	1381	123	<u>1374</u>	<u>124</u>
465.tonto	16	<u>733</u>	<u>215</u>	746	211	717	220	16	679	232	682	231	<u>680</u>	<u>231</u>
470.lbm	16	<u>2087</u>	<u>105</u>	2167	101	1927	114	8	1025	107	<u>893</u>	<u>123</u>	831	132
481.wrf	16	<u>785</u>	<u>228</u>	839	213	778	230	16	<u>785</u>	<u>228</u>	839	213	778	230
482.sphinx3	16	<u>2207</u>	<u>141</u>	2217	141	2065	151	16	2083	150	<u>2023</u>	<u>154</u>	1665	187

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores
 "(For details, please see the config file.)"

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 194

Sun Blade X6270 (Intel Xeon X5570 2.93GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Platform Notes

Default BIOS settings used.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 194

Sun Blade X6270 (Intel Xeon X5570 2.93GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2009

Tested by: Sun Microsystems

Software Availability: Nov-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 194

Sun Blade X6270 (Intel Xeon X5570 2.93GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 6

Test date: Mar-2009

Test sponsor: Sun Microsystems

Hardware Availability: Apr-2009

Tested by: Sun Microsystems

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 194

Sun Blade X6270 (Intel Xeon X5570 2.93GHz)

SPECfp_rate_base2006 = 187

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Mar-2009

Hardware Availability: Apr-2009

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:02:34 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 April 2009.