



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint®\_rate2006 = 274

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3


Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

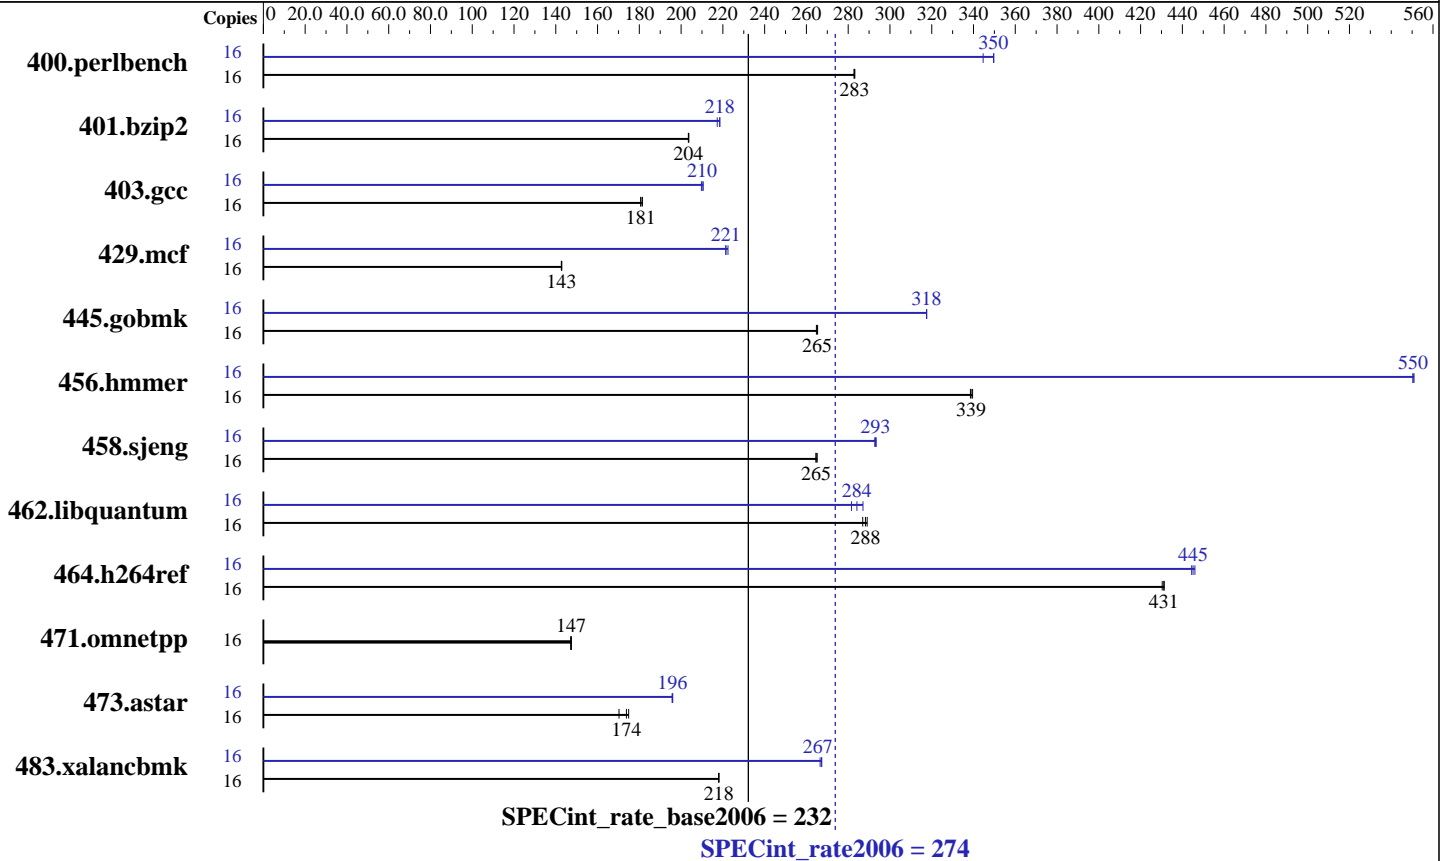

### Hardware

CPU Name: AMD Opteron 8393 SE  
 CPU Characteristics: 3100  
 CPU MHz: Integrated  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 64 GB (16x4 GB, PC2-6400P CL5)  
 Disk Subsystem: 1x72 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 274

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	552	283	553	283	<u>552</u>	<u>283</u>	16	447	350	454	345	<u>447</u>	<u>350</u>
401.bzip2	16	<u>758</u>	<u>204</u>	759	203	758	204	16	706	219	711	217	<u>707</u>	<u>218</u>
403.gcc	16	710	181	713	181	<u>712</u>	<u>181</u>	16	<u>613</u>	<u>210</u>	614	210	612	211
429.mcf	16	<u>1022</u>	<u>143</u>	1022	143	1023	143	16	659	221	<u>659</u>	<u>221</u>	656	222
445.gobmk	16	634	265	632	265	<u>633</u>	<u>265</u>	16	529	318	528	318	<u>529</u>	<u>318</u>
456.hammer	16	440	340	<u>441</u>	<u>339</u>	441	339	16	271	550	<u>271</u>	<u>550</u>	271	551
458.sjeng	16	730	265	<u>731</u>	<u>265</u>	732	265	16	661	293	<u>661</u>	<u>293</u>	660	293
462.libquantum	16	<u>1150</u>	<u>288</u>	1147	289	1155	287	16	<u>1167</u>	<u>284</u>	1155	287	1177	282
464.h264ref	16	823	430	821	431	<u>821</u>	<u>431</u>	16	<u>795</u>	<u>445</u>	797	444	794	446
471.omnetpp	16	680	147	678	147	<u>679</u>	<u>147</u>	16	680	147	678	147	<u>679</u>	<u>147</u>
473.astar	16	660	170	642	175	<u>646</u>	<u>174</u>	16	573	196	<u>573</u>	<u>196</u>	574	196
483.xalancbmk	16	<u>506</u>	<u>218</u>	506	218	506	218	16	413	267	414	267	<u>413</u>	<u>267</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 14336.

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 274

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed  
--zc\_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 274

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
-IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
-CG:local\_sched\_alg=1  
401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
-OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
-m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs  
403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
-LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
-CG:prefer\_lru\_reg=off -m32  
429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
-CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
-L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 274

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 232

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
-LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
-LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
-LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
-Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mphi(pass 1) -Mphi(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
--zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 274**

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

**SPECint\_rate\_base2006 = 232**

**CPU2006 license:** 3

**Test date:** Apr-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2009

## Peak Other Flags (Continued)

456.hmmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.html)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.00.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.00.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.xml)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.00.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.00.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 02:03:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 April 2009.