SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECint®2006 =	35.0
SPECint_base2006 =	30.5

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

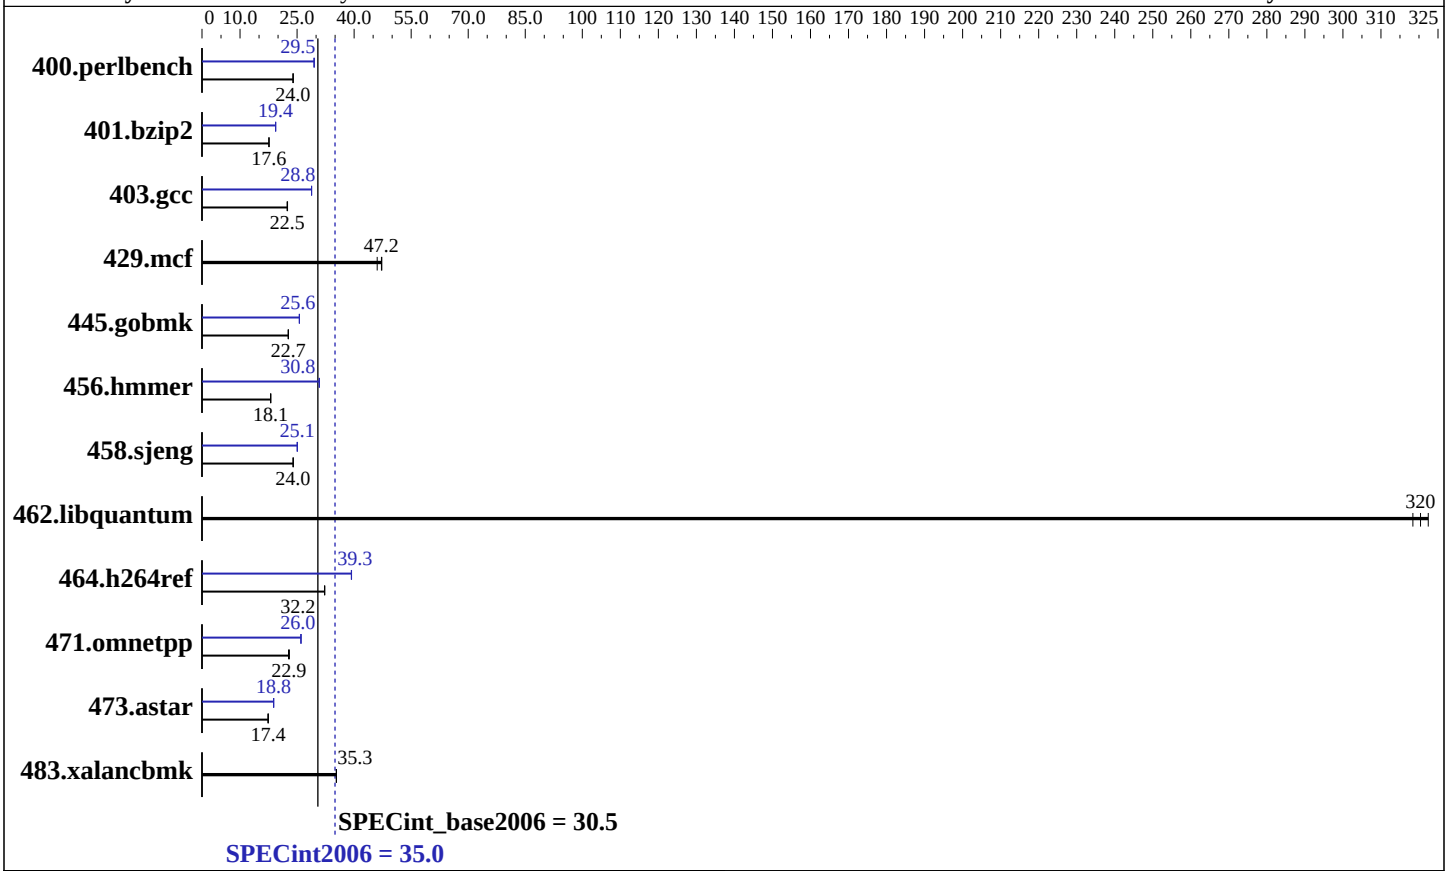

Hardware

CPU Name:	Intel Xeon X5570
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 or 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6 x 4 GB DDR3-1333)
Disk Subsystem:	1 x 1 TB, SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64) SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066, l_cprof_p_11.0.066
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1 Binutils 2.18.50

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Fire X2270 (Intel Xeon X5570 2.93GHz)

SPECint2006 = 35.0

SPECint_base2006 = 30.5

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: Mar-2009
Hardware Availability: Apr-2009
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	407	24.0	**408**	**24.0**	408	23.9	**331**	**29.5**	332	29.5	331	29.5
401.bzip2	548	17.6	**548**	**17.6**	548	17.6	498	19.4	498	19.4	**498**	**19.4**
403.gcc	358	22.5	**358**	**22.5**	360	22.4	280	28.8	**279**	**28.8**	279	28.8
429.mcf	198	46.1	193	47.3	**193**	**47.2**	198	46.1	193	47.3	**193**	**47.2**
445.gobmk	462	22.7	462	22.7	**462**	**22.7**	410	25.6	**410**	**25.6**	410	25.6
456.hmmer	517	18.1	**517**	**18.1**	517	18.1	303	30.8	**302**	**30.8**	302	30.9
458.sjeng	**505**	**24.0**	504	24.0	505	24.0	**483**	**25.1**	482	25.1	483	25.0
462.libquantum	64.3	322	65.1	318	**64.7**	**320**	64.3	322	65.1	318	**64.7**	**320**
464.h264ref	**686**	**32.2**	685	32.3	687	32.2	563	39.3	563	39.3	**563**	**39.3**
471.omnetpp	275	22.7	272	23.0	**273**	**22.9**	240	26.0	240	26.0	**240**	**26.0**
473.astar	405	17.3	**403**	**17.4**	402	17.5	373	18.8	**373**	**18.8**	372	18.9
483.xalancbmk	195	35.3	195	35.3	**195**	**35.3**	195	35.3	195	35.3	**195**	**35.3**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings used.

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/042/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/042/bin/intel64/icc

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc -opt-malloc-options=3

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.07.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.07.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:56:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 April 2009.