



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5502)

**SPECfp®\_rate2006 = 70.9**

**SPECfp\_rate\_base2006 = 68.2**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

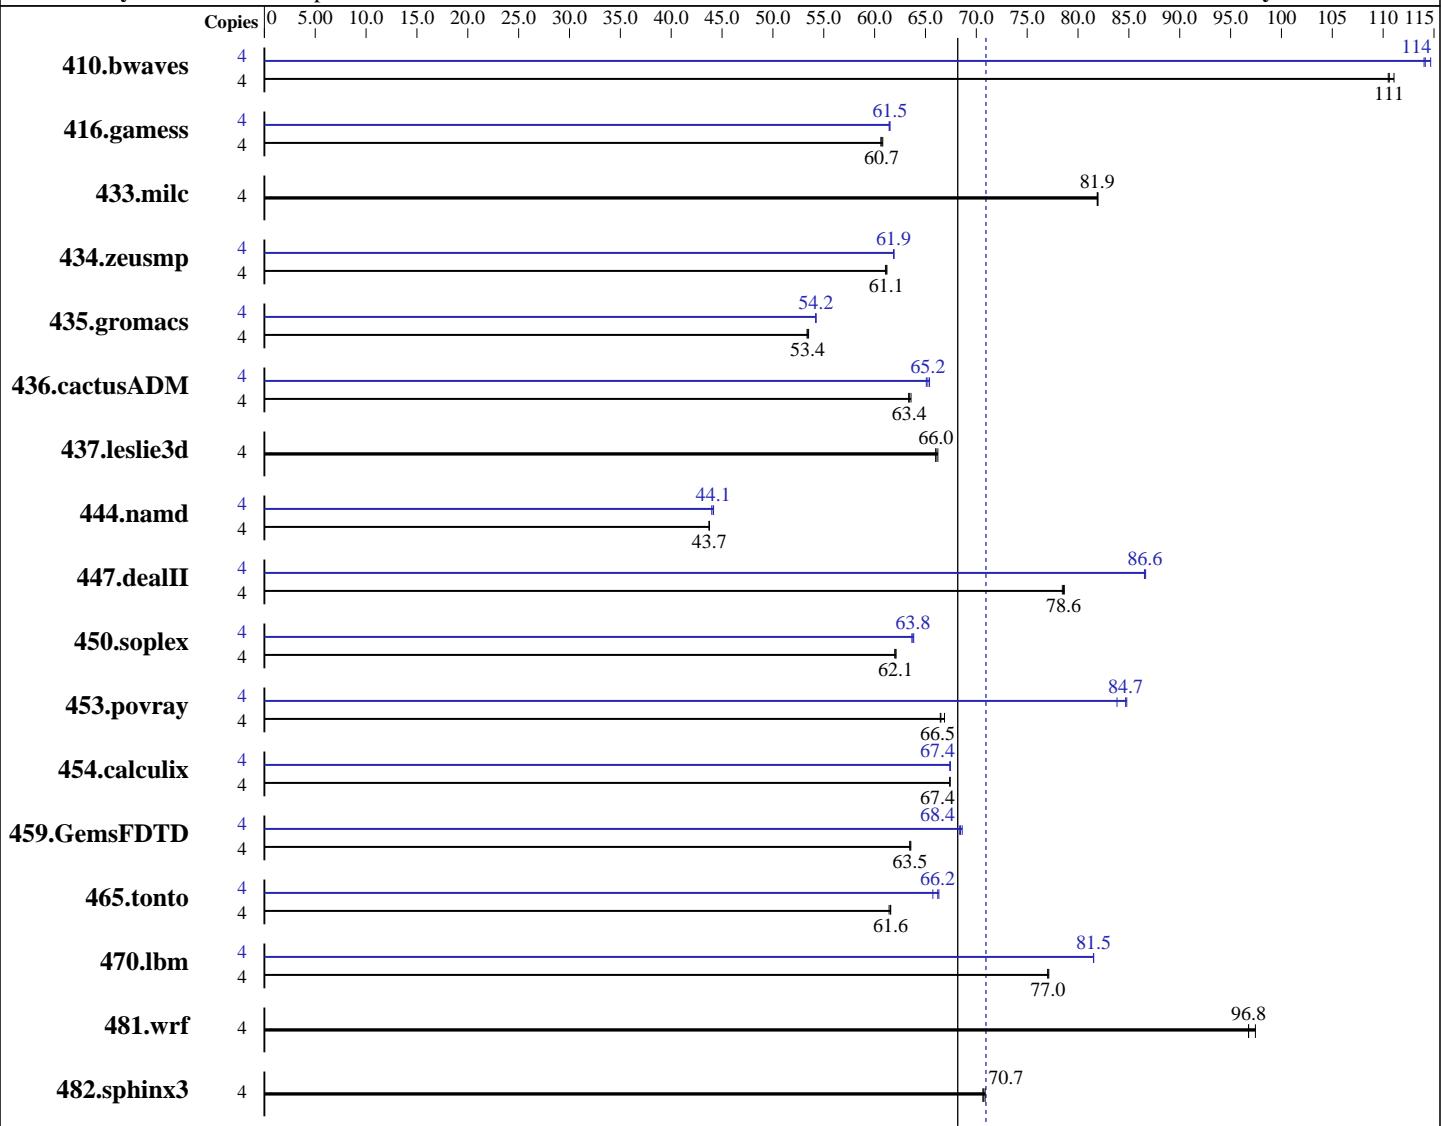

### Hardware

CPU Name: Intel Xeon E5502  
CPU Characteristics:  
CPU MHz: 1867  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, Kernel 2.6.16.60-0.34-smp  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.081, l\_cprof\_p\_11.0.081  
Auto Parallel: No  
File System: ReiserFS  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5502)

**SPECfp\_rate2006 = 70.9**

**SPECfp\_rate\_base2006 = 68.2**

**CPU2006 license:** 9006

**Test date:** Apr-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 X 4 GB PC3-8500R, 2 rank, CL7, ECC)  
Disk Subsystem: 1x73.2 GB SAS, 15000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	492	111	<b>491</b>	<b>111</b>	489	111	4	477	114	<b>476</b>	<b>114</b>	474	115
416.gamess	4	1288	60.8	1292	60.6	<b>1290</b>	<b>60.7</b>	4	<b>1274</b>	<b>61.5</b>	1275	61.4	1274	61.5
433.milc	4	448	82.0	448	81.9	<b>448</b>	<b>81.9</b>	4	448	82.0	448	81.9	<b>448</b>	<b>81.9</b>
434.zeusmp	4	<b>595</b>	<b>61.1</b>	596	61.1	595	61.2	4	588	61.9	588	61.9	<b>588</b>	<b>61.9</b>
435.gromacs	4	<b>535</b>	<b>53.4</b>	534	53.5	535	53.4	4	527	54.2	527	54.2	<b>527</b>	<b>54.2</b>
436.cactusADM	4	755	63.3	752	63.6	<b>754</b>	<b>63.4</b>	4	734	65.1	731	65.4	<b>733</b>	<b>65.2</b>
437.leslie3d	4	570	66.0	<b>569</b>	<b>66.0</b>	568	66.2	4	570	66.0	<b>569</b>	<b>66.0</b>	568	66.2
444.namd	4	734	43.7	733	43.7	<b>733</b>	<b>43.7</b>	4	726	44.2	729	44.0	<b>727</b>	<b>44.1</b>
447.dealII	4	<b>582</b>	<b>78.6</b>	582	78.7	583	78.5	4	528	86.6	<b>529</b>	<b>86.6</b>	529	86.5
450.soplex	4	537	62.1	<b>537</b>	<b>62.1</b>	538	62.0	4	523	63.8	<b>523</b>	<b>63.8</b>	524	63.7
453.povray	4	318	66.9	<b>320</b>	<b>66.5</b>	320	66.5	4	251	84.8	<b>251</b>	<b>84.7</b>	254	83.8
454.calculix	4	490	67.4	<b>490</b>	<b>67.4</b>	490	67.4	4	489	67.4	490	67.4	<b>489</b>	<b>67.4</b>
459.GemsFDTD	4	<b>669</b>	<b>63.5</b>	668	63.6	669	63.5	4	<b>620</b>	<b>68.4</b>	619	68.6	621	68.4
465.tonto	4	<b>639</b>	<b>61.6</b>	639	61.6	641	61.4	4	<b>594</b>	<b>66.2</b>	593	66.3	599	65.7
470.lbm	4	713	77.1	<b>713</b>	<b>77.0</b>	714	77.0	4	<b>674</b>	<b>81.5</b>	674	81.5	674	81.5
481.wrf	4	462	96.8	459	97.4	<b>462</b>	<b>96.8</b>	4	462	96.8	459	97.4	<b>462</b>	<b>96.8</b>
482.sphinx3	4	1100	70.9	1104	70.6	<b>1102</b>	<b>70.7</b>	4	1100	70.9	1104	70.6	<b>1102</b>	<b>70.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
NUMA configuration: Enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5502)

**SPECfp\_rate2006 = 70.9**

**SPECfp\_rate\_base2006 = 68.2**

**CPU2006 license:** 9006

**Test date:** Apr-2009

**Test sponsor:** NEC Corporation

**Hardware Availability:** Apr-2009

**Tested by:** NEC Corporation

**Software Availability:** Feb-2009

## General Notes

The NEC Express5800/T120a-M(Intel Xeon E5502) and the Bull NovaScale T860 E2 (Intel Xeon E5502, 1.86 GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/T120a-M(Intel Xeon E5502) model.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5502)

**SPECfp\_rate2006 = 70.9**

**SPECfp\_rate\_base2006 = 68.2**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5502)

**SPECfp\_rate2006 = 70.9**

**SPECfp\_rate\_base2006 = 68.2**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias -scalar-rep-

450.soplex: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0 -opt-prefetch

465.tonto: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -auto

Benchmarks using both Fortran and C:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5502)

**SPECfp\_rate2006 = 70.9**

**SPECfp\_rate\_base2006 = 68.2**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Apr-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -opt-prefetch -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.html>  
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:42:43 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 May 2009.