



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R570, Intel Xeon E5520

SPECint®\_rate2006 = 200

SPECint\_rate\_base2006 = 187

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

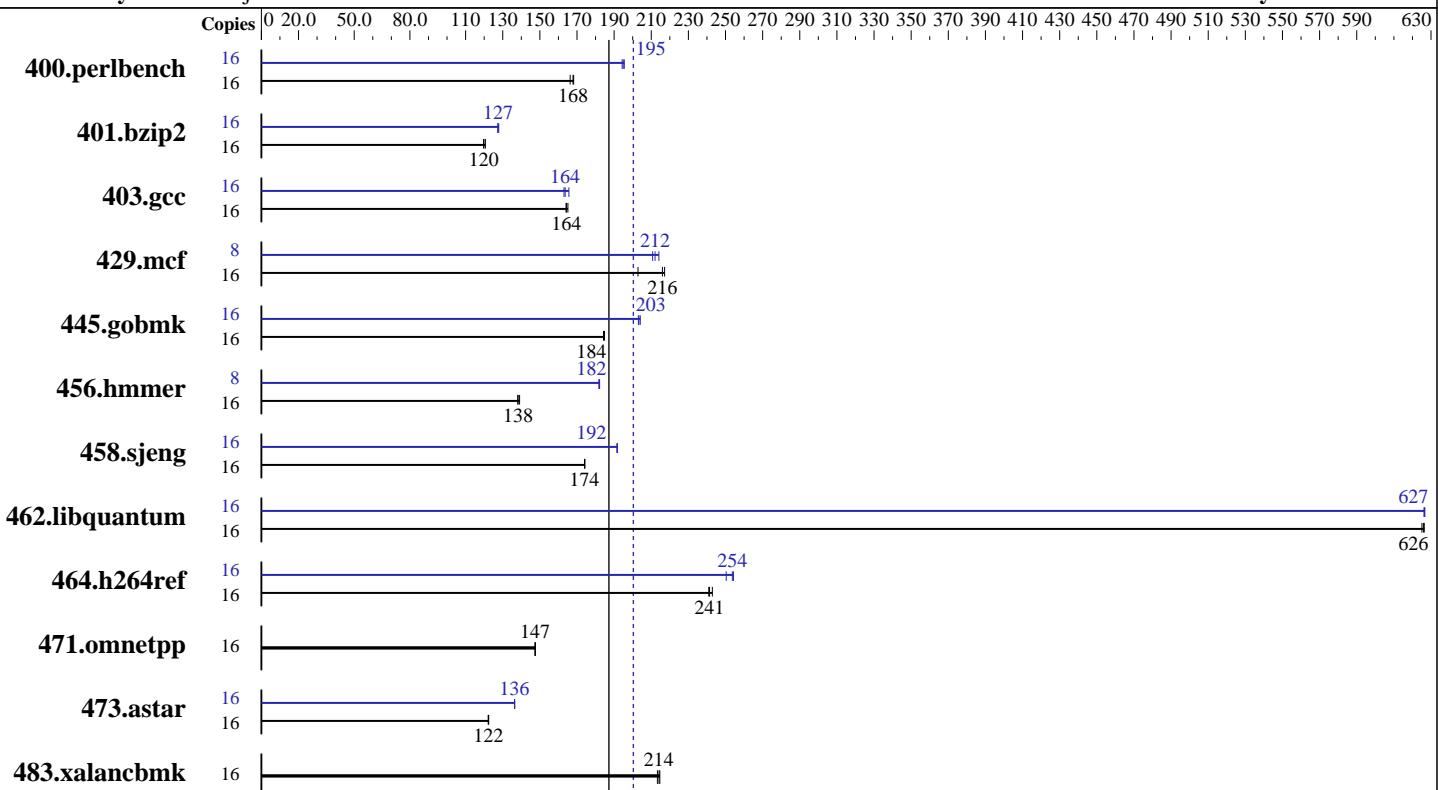

SPECint\_rate\_base2006 = 187

SPECint\_rate2006 = 200

## Hardware

CPU Name:	Intel Xeon E5520
CPU Characteristics:	Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz:	2267
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	24 GB (6x4 GB PC3 10600R, 2 rank, ECC, running at 1066 MHz)
Disk Subsystem:	1 x SATA II, 400 GB, 7200 rpm
Other Hardware:	None

## Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64)
Compiler:	SP2, kernel 2.6.16.60-0.21-smp
Auto Parallel:	Intel C++ Compiler 11.0 for Linux
File System:	Build 20090131 Package ID: l_cproc_p_11.0.080
System State:	No
Base Pointers:	ext3
Peak Pointers:	Multi-User Run Level 3
Other Software:	32-bit
	32/64-bit
	Microquill SmartHeap V8.1
	Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R570, Intel Xeon E5520

SPECint\_rate2006 = 200

SPECint\_rate\_base2006 = 187

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	940	166	<b>931</b>	<b>168</b>	929	168	16	804	194	<b>802</b>	<b>195</b>	800	195
401.bzip2	16	<b>1288</b>	<b>120</b>	1280	121	1289	120	16	1213	127	<b>1211</b>	<b>127</b>	1207	128
403.gcc	16	780	165	785	164	<b>784</b>	<b>164</b>	16	790	163	778	166	<b>787</b>	<b>164</b>
429.mcf	16	719	203	672	217	<b>675</b>	<b>216</b>	8	346	211	<b>344</b>	<b>212</b>	341	214
445.gobmk	16	908	185	911	184	<b>910</b>	<b>184</b>	16	822	204	<b>825</b>	<b>203</b>	827	203
456.hammer	16	1081	138	1073	139	<b>1079</b>	<b>138</b>	8	411	182	410	182	<b>410</b>	<b>182</b>
458.sjeng	16	1112	174	1111	174	<b>1112</b>	<b>174</b>	16	1011	192	1010	192	<b>1010</b>	<b>192</b>
462.libquantum	16	<b>530</b>	<b>626</b>	530	625	529	626	16	529	627	529	626	<b>529</b>	<b>627</b>
464.h264ref	16	1469	241	1458	243	<b>1467</b>	<b>241</b>	16	1392	254	1414	250	<b>1396</b>	<b>254</b>
471.omnetpp	16	678	148	678	147	<b>678</b>	<b>147</b>	16	678	148	678	147	<b>678</b>	<b>147</b>
473.astar	16	918	122	<b>918</b>	<b>122</b>	919	122	16	823	136	<b>824</b>	<b>136</b>	824	136
483.xalancbmk	16	518	213	<b>516</b>	<b>214</b>	514	215	16	518	213	<b>516</b>	<b>214</b>	514	215

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

For information about Fujitsu please visit:  
<http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
 icc

C++ benchmarks:  
 icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R570, Intel Xeon E5520

**SPECint\_rate2006 = 200**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

**Test date:** May-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmr: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmr: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R570, Intel Xeon E5520

SPECint\_rate2006 = 200

SPECint\_rate\_base2006 = 187

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

CELSIUS R570, Intel Xeon E5520

**SPECint\_rate2006 = 200**

**SPECint\_rate\_base2006 = 187**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** May-2009

**Hardware Availability:** Apr-2009

**Software Availability:** Feb-2009

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.06.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.06.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:29:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 May 2009.