



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp®_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49


Test date: May-2009

Test sponsor: Advanced Micro Devices

Hardware Availability: Jun-2009

Tested by: Advanced Micro Devices

Software Availability: Apr-2009

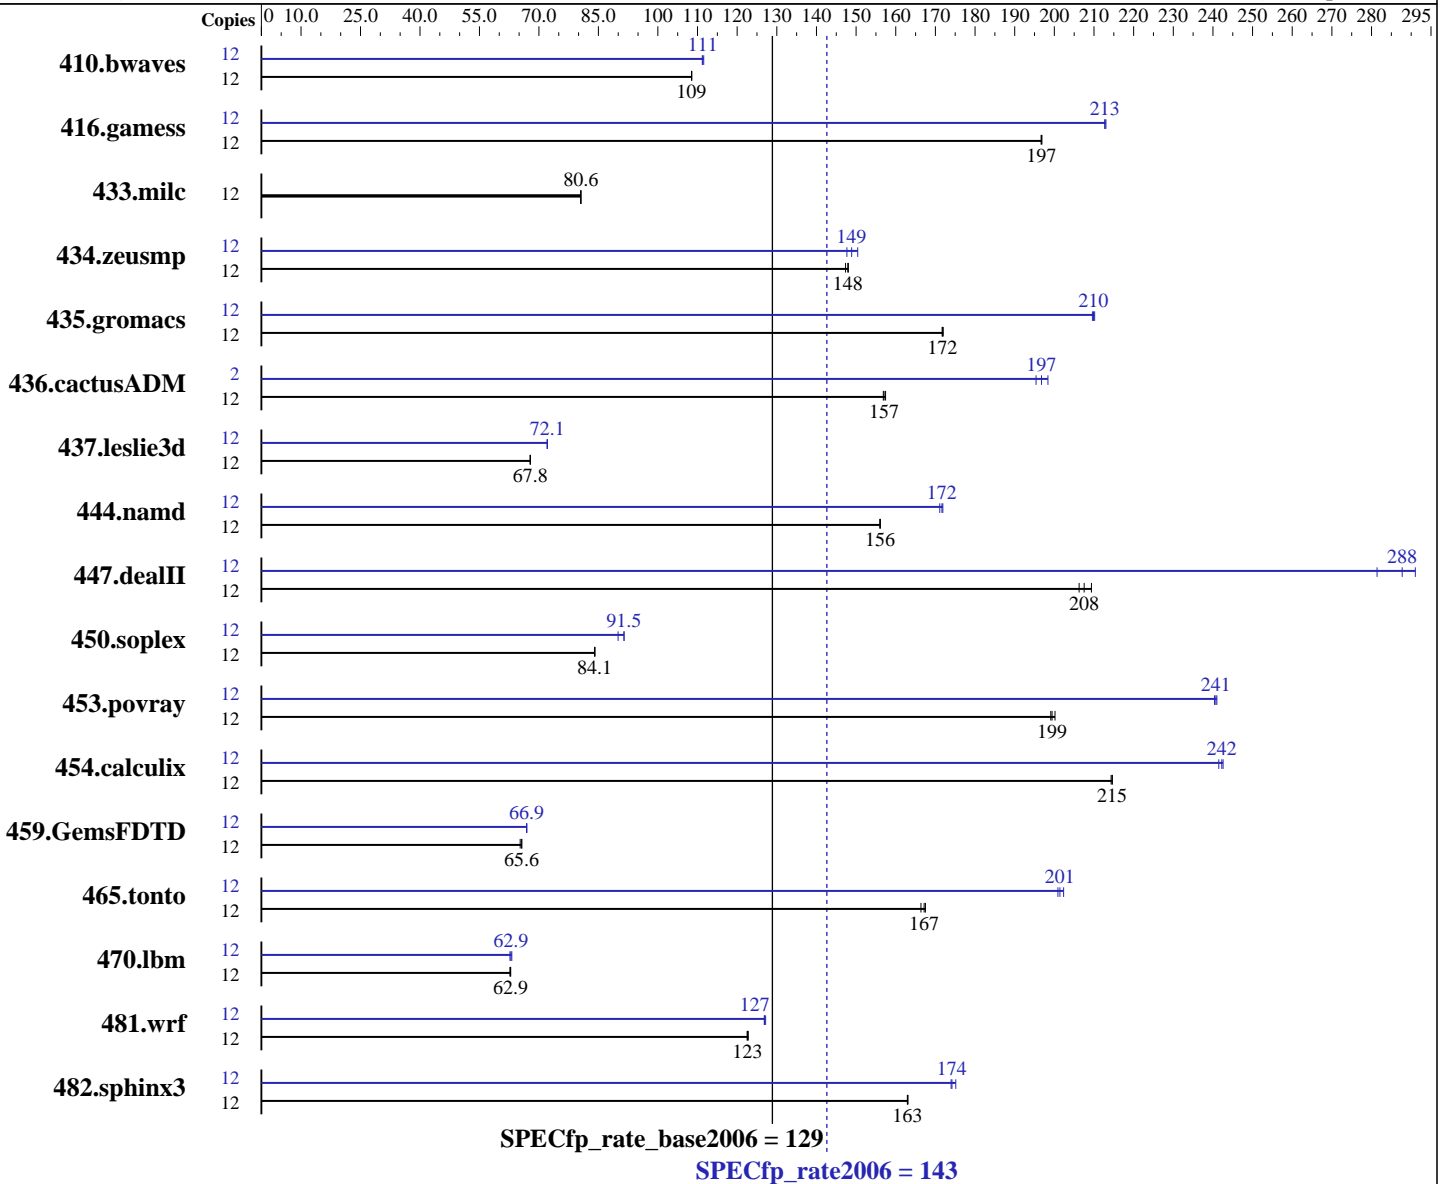

Hardware

CPU Name: AMD Opteron 2435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0
 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, DDR2-800, CL5, Reg, Dual Rank)
Disk Subsystem: 1 x 250 GB SATA, 7200 RPM
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	1502	109	<u>1503</u>	<u>109</u>	1503	109	12	<u>1465</u>	<u>111</u>	1462	112	1466	111
416.gamess	12	1195	197	<u>1194</u>	<u>197</u>	1193	197	12	<u>1104</u>	<u>213</u>	1105	213	1103	213
433.milc	12	<u>1367</u>	<u>80.6</u>	1367	80.6	1368	80.6	12	<u>1367</u>	<u>80.6</u>	1367	80.6	1368	80.6
434.zeusmp	12	741	147	738	148	<u>738</u>	<u>148</u>	12	739	148	<u>734</u>	<u>149</u>	726	150
435.gromacs	12	499	172	498	172	<u>499</u>	<u>172</u>	12	<u>408</u>	<u>210</u>	409	210	408	210
436.cactusADM	12	911	157	<u>913</u>	<u>157</u>	914	157	2	122	195	120	198	<u>121</u>	<u>197</u>
437.leslie3d	12	1663	67.8	1664	67.8	<u>1663</u>	<u>67.8</u>	12	1564	72.1	1565	72.1	<u>1564</u>	<u>72.1</u>
444.namd	12	616	156	617	156	<u>617</u>	<u>156</u>	12	562	171	560	172	<u>561</u>	<u>172</u>
447.dealII	12	<u>662</u>	<u>208</u>	656	209	666	206	12	472	291	<u>477</u>	<u>288</u>	488	281
450.soplex	12	<u>1190</u>	<u>84.1</u>	1191	84.1	1190	84.1	12	1112	90.0	1094	91.5	<u>1094</u>	<u>91.5</u>
453.povray	12	319	200	<u>320</u>	<u>199</u>	321	199	12	266	240	<u>265</u>	<u>241</u>	265	241
454.calculix	12	462	214	461	215	<u>461</u>	<u>215</u>	12	<u>409</u>	<u>242</u>	410	241	408	243
459.GemsFDTD	12	1938	65.7	<u>1940</u>	<u>65.6</u>	1951	65.3	12	1902	66.9	1903	66.9	<u>1903</u>	<u>66.9</u>
465.tonto	12	705	167	710	166	<u>706</u>	<u>167</u>	12	584	202	<u>586</u>	<u>201</u>	588	201
470.lbm	12	<u>2623</u>	<u>62.9</u>	2631	62.7	2622	62.9	12	<u>2620</u>	<u>62.9</u>	2630	62.7	2610	63.2
481.wrf	12	1094	123	<u>1093</u>	<u>123</u>	1091	123	12	1054	127	<u>1056</u>	<u>127</u>	1057	127
482.sphinx3	12	1434	163	1435	163	<u>1435</u>	<u>163</u>	12	1344	174	<u>1343</u>	<u>174</u>	1335	175

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/work/cpu2006v1.1/amd0905is-libs/64:/root/work/cpu2006v1.1/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>.

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.html>

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

SPECfp_rate2006 = 143

A+ Server 1021M-UR+B, AMD Opteron 2435

SPECfp_rate_base2006 = 129

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: May-2009

Hardware Availability: Jun-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 01:40:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 June 2009.