



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120a-1
(Intel Xeon E5530)

SPECfp®2006 = 32.5

SPECfp_base2006 = 30.6

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

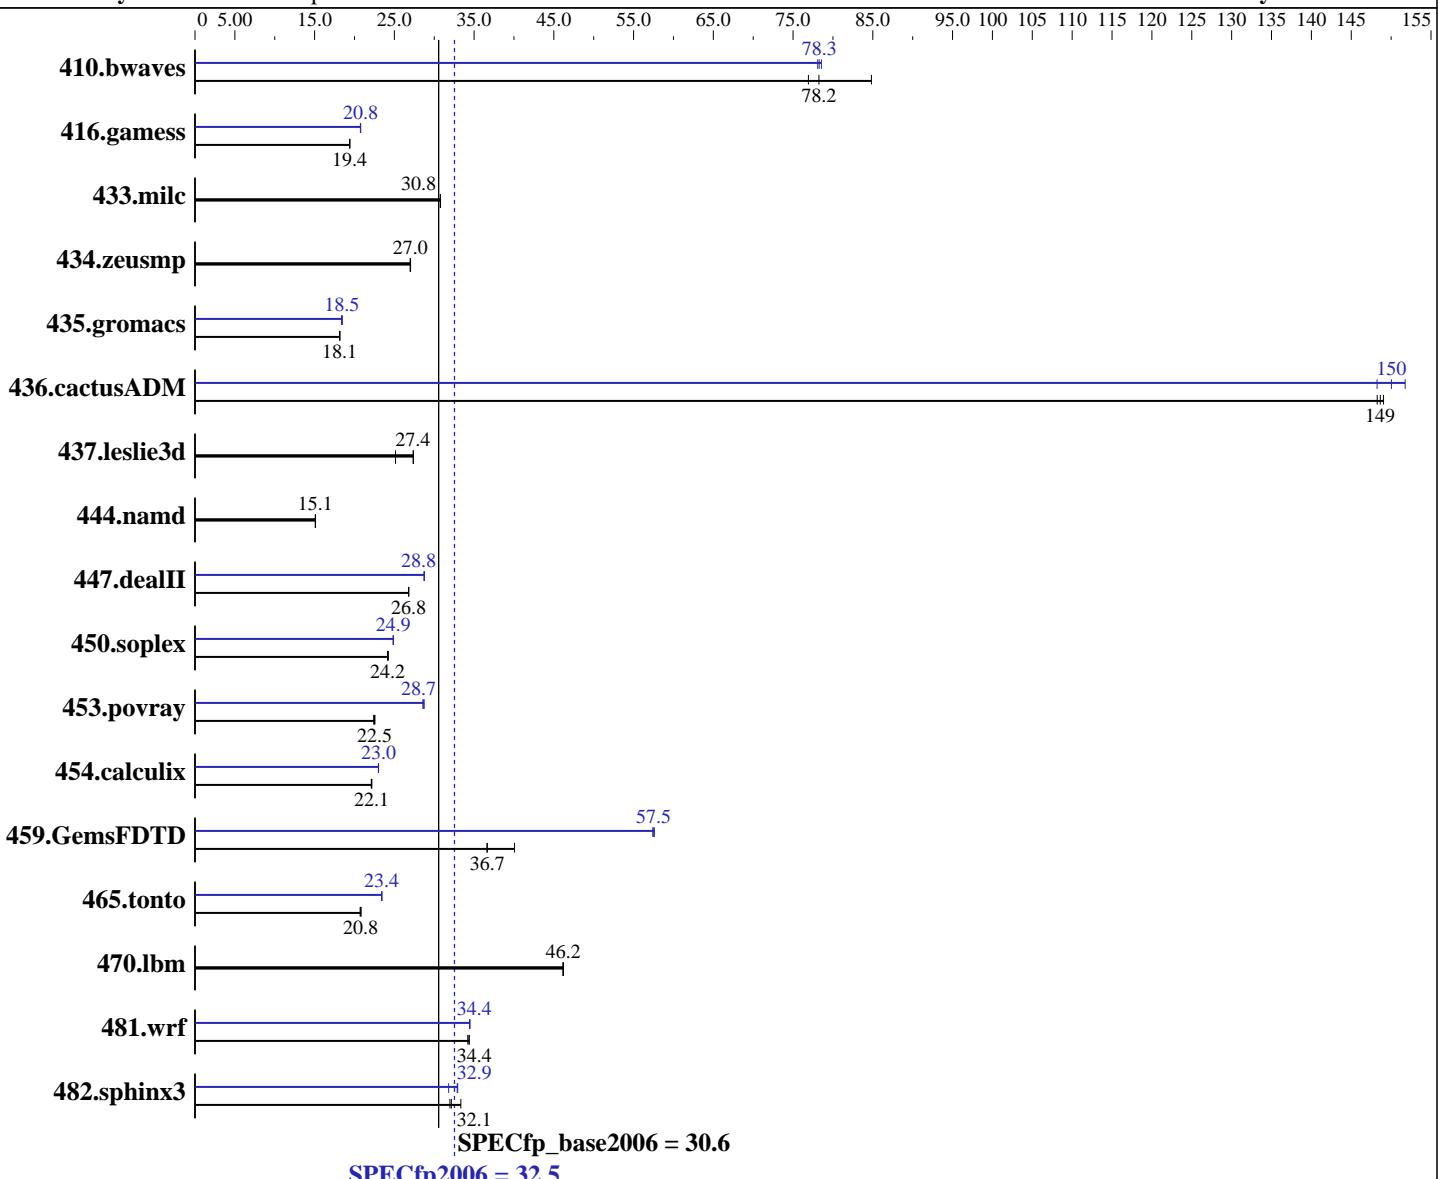

Hardware

CPU Name: Intel Xeon E5530
CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64)
SP2 with patch Linux kernel 20090119,
Kernel 2.6.16.60-0.34-smp
Compiler: Intel C++ and Fortran Compiler Professional 11.0
for Linux
Build 20090131 Package ID: l_cproc_p_11.0.081,
l_cprof_p_11.0.081
Auto Parallel: Yes
File System: ReiserFS

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120a-1
(Intel Xeon E5530)

SPECfp2006 = 32.5

SPECfp_base2006 = 30.6

CPU2006 license: 9006

Test date: May-2009

Test sponsor: NEC Corporation

Hardware Availability: Apr-2009

Tested by: NEC Corporation

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12 X 4 GB PC3-8500R, 2 rank, CL7, ECC)
Disk Subsystem: 1x146.5 GB SAS, 15000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	177	76.9	160	84.8	174	78.2	173	78.6	174	78.1	174	78.3
416.gamess	1009	19.4	1010	19.4	1009	19.4	944	20.7	942	20.8	943	20.8
433.milc	298	30.8	298	30.8	298	30.8	298	30.8	298	30.8	298	30.8
434.zeusmp	337	27.0	337	27.0	337	27.0	337	27.0	337	27.0	337	27.0
435.gromacs	393	18.2	393	18.1	394	18.1	387	18.5	389	18.4	387	18.5
436.cactusADM	80.2	149	80.6	148	80.4	149	78.7	152	80.6	148	79.6	150
437.leslie3d	343	27.4	344	27.4	374	25.1	343	27.4	344	27.4	374	25.1
444.namd	531	15.1	532	15.1	531	15.1	531	15.1	532	15.1	531	15.1
447.dealII	427	26.8	427	26.8	427	26.8	398	28.7	398	28.8	398	28.8
450.soplex	345	24.2	346	24.1	344	24.2	335	24.9	335	24.9	335	24.9
453.povray	236	22.6	237	22.4	236	22.5	185	28.7	186	28.6	185	28.7
454.calculix	372	22.1	373	22.1	372	22.2	358	23.0	358	23.0	359	23.0
459.GemsFDTD	290	36.6	289	36.7	265	40.1	184	57.5	184	57.6	185	57.4
465.tonto	473	20.8	473	20.8	475	20.7	420	23.4	420	23.4	420	23.4
470.lbm	298	46.1	297	46.2	298	46.2	298	46.1	297	46.2	298	46.2
481.wrf	327	34.2	325	34.4	325	34.4	324	34.4	324	34.4	324	34.5
482.sphinx3	585	33.3	610	32.0	606	32.1	593	32.9	613	31.8	592	32.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M

Platform Notes

BIOS setting:
NUMA configuration : Enabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120a-1
(Intel Xeon E5530)

SPECfp2006 = 32.5

SPECfp_base2006 = 30.6

CPU2006 license: 9006

Test date: May-2009

Test sponsor: NEC Corporation

Hardware Availability: Apr-2009

Tested by: NEC Corporation

Software Availability: Feb-2009

General Notes

The NEC Express5800/R120a-1 (Intel Xeon E5530),
the NEC Express5800/R120a-2 (Intel Xeon E5530),
the Bull NovaScale R440 E2 (Intel Xeon E5530, 2.40 GHz) and
the Bull NovaScale R460 E2 (Intel Xeon E5530, 2.40 GHz) models are electronically equivalent.
The results have been measured on a NEC Express5800/R120a-1 (Intel Xeon E5530) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
        444.namd: -DSPEC_CPU_LP64
        447.dealII: -DSPEC_CPU_LP64
        450.soplex: -DSPEC_CPU_LP64
        453.povray: -DSPEC_CPU_LP64
        454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
        470.lbm: -DSPEC_CPU_LP64
        481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120a-1
(Intel Xeon E5530)

SPECfp2006 = 32.5

SPECfp_base2006 = 30.6

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120a-1
(Intel Xeon E5530)

SPECfp2006 = 32.5

SPECfp_base2006 = 30.6

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: May-2009

Hardware Availability: Apr-2009

Software Availability: Feb-2009

Peak Optimization Flags

C benchmarks:

```
433.milc: basepeak = yes
470.lbm: basepeak = yes
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
```

C++ benchmarks:

```
444.namd: basepeak = yes
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -ansi-alias -scalar-rep -opt-prefetch
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -opt-malloc-options=3
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll14 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
             -parallel
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll12 -Ob0 -ansi-alias -scalar-rep-
434.zeusmp: basepeak = yes
437.leslie3d: basepeak = yes
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
                -unroll12 -Ob0 -opt-prefetch -parallel
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
             -unroll14 -auto
```

Benchmarks using both Fortran and C:

```
435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
              -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
              -opt-prefetch -auto-ilp32
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R120a-1
(Intel Xeon E5530)

SPECfp2006 = 32.5

SPECfp_base2006 = 30.6

CPU2006 license: 9006

Test date: May-2009

Test sponsor: NEC Corporation

Hardware Availability: Apr-2009

Tested by: NEC Corporation

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: -xsSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xsSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revG.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 00:13:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 10 June 2009.