



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 165

PRIMERGY TX200 S5, Intel Xeon L5530, 2.40 GHz

SPECfp_rate_base2006 = 159

CPU2006 license: 19


Test date: Jul-2009

Test sponsor: Fujitsu

Hardware Availability: Aug-2009

Tested by: Fujitsu

Software Availability: Feb-2009

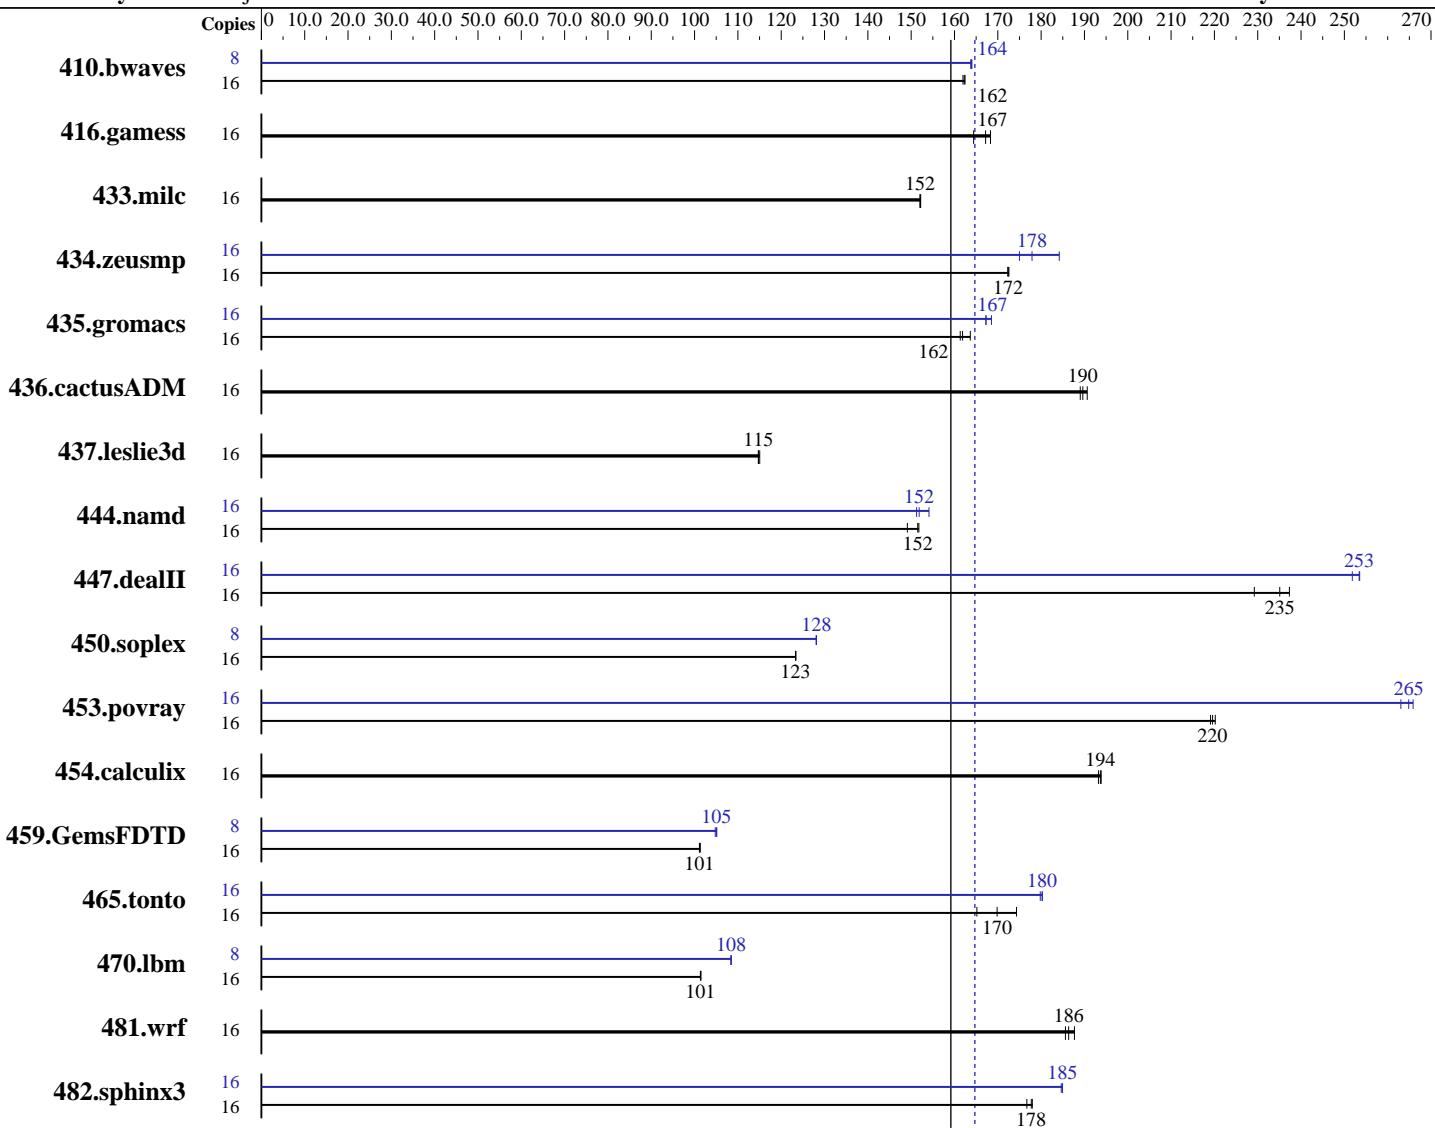

SPECfp_rate_base2006 = 159

SPECfp_rate2006 = 165

Hardware

CPU Name: Intel Xeon L5530
CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz: 2400
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel: No
File System: ext3
System State: Multi-User Run Level 3
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 165

PRIMERGY TX200 S5, Intel Xeon L5530, 2.40 GHz

SPECfp_rate_base2006 = 159

CPU2006 license: 19

Test date: Jul-2009

Test sponsor: Fujitsu

Hardware Availability: Aug-2009

Tested by: Fujitsu

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC,
 see add'l detail in notes)
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
 Other Hardware: None

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1343	162	1339	162	<u>1340</u>	<u>162</u>	8	663	164	<u>663</u>	<u>164</u>	664	164	664	164
416.gamess	16	1905	164	1861	168	<u>1874</u>	<u>167</u>	16	1905	164	1861	168	<u>1874</u>	<u>167</u>	1874	<u>167</u>
433.milc	16	965	152	<u>966</u>	<u>152</u>	966	152	16	965	152	<u>966</u>	<u>152</u>	966	152	966	152
434.zeusmp	16	844	173	<u>845</u>	<u>172</u>	845	172	16	832	175	<u>818</u>	<u>178</u>	790	184	790	184
435.gromacs	16	708	161	<u>706</u>	<u>162</u>	698	164	16	678	169	683	167	<u>683</u>	<u>167</u>	683	<u>167</u>
436.cactusADM	16	1003	191	1011	189	<u>1008</u>	<u>190</u>	16	1003	191	1011	189	<u>1008</u>	<u>190</u>	1008	<u>190</u>
437.leslie3d	16	1311	115	<u>1311</u>	<u>115</u>	1307	115	16	1311	115	<u>1311</u>	<u>115</u>	1307	115	1307	115
444.namd	16	<u>847</u>	<u>152</u>	845	152	861	149	16	833	154	<u>845</u>	<u>152</u>	848	151	848	151
447.dealII	16	771	237	799	229	<u>779</u>	<u>235</u>	16	<u>722</u>	<u>253</u>	727	252	722	254	722	254
450.soplex	16	<u>1082</u>	<u>123</u>	1082	123	1082	123	8	521	128	<u>521</u>	<u>128</u>	521	128	521	128
453.povray	16	<u>388</u>	<u>220</u>	388	219	387	220	16	324	263	<u>321</u>	<u>265</u>	320	266	320	266
454.calculix	16	681	194	<u>682</u>	<u>194</u>	683	193	16	681	194	<u>682</u>	<u>194</u>	683	193	683	193
459.GemsFDTD	16	1679	101	1675	101	<u>1679</u>	<u>101</u>	8	807	105	810	105	<u>808</u>	<u>105</u>	808	<u>105</u>
465.tonto	16	953	165	<u>927</u>	<u>170</u>	903	174	16	876	180	<u>874</u>	<u>180</u>	873	180	873	180
470.lbm	16	2167	101	<u>2168</u>	<u>101</u>	2169	101	8	1014	108	<u>1014</u>	<u>108</u>	1014	108	1014	108
481.wrf	16	952	188	963	186	<u>959</u>	<u>186</u>	16	952	188	963	186	<u>959</u>	<u>186</u>	959	<u>186</u>
482.sphinx3	16	1752	178	1765	177	<u>1755</u>	<u>178</u>	16	<u>1686</u>	<u>185</u>	1686	185	1689	185	1689	185

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

numactl was used to bind processes to cores and its local memory.

Details may be found in the config file.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

The system automatically configures the memory to run at 1066 MHz.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon L5530, 2.40 GHz

SPECfp_rate2006 = 165

CPU2006 license: 19

Test date: Jul-2009

Test sponsor: Fujitsu

Hardware Availability: Aug-2009

Tested by: Fujitsu

Software Availability: Feb-2009

General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon L5530, 2.40 GHz

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 159

Test date: Jul-2009

Hardware Availability: Aug-2009

Software Availability: Feb-2009

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon L5530, 2.40 GHz

SPECfp_rate2006 = 165

CPU2006 license: 19

Test date: Jul-2009

Test sponsor: Fujitsu

Hardware Availability: Aug-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

433.milc: basepeak = yes

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -ansi-alias -scalar-rep-

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: basepeak = yes

434.zeusmp: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX200 S5, Intel Xeon L5530, 2.40 GHz

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 159

CPU2006 license: 19

Test date: Jul-2009

Test sponsor: Fujitsu

Hardware Availability: Aug-2009

Tested by: Fujitsu

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.15.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.15.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:33:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 18 August 2009.