



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECint®\_rate2006 = 735

ProLiant DL785 G6  
(2.4 GHz AMD Opteron 8431)

### SPECint\_rate\_base2006 = 573

CPU2006 license: 3


Test date: Jul-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

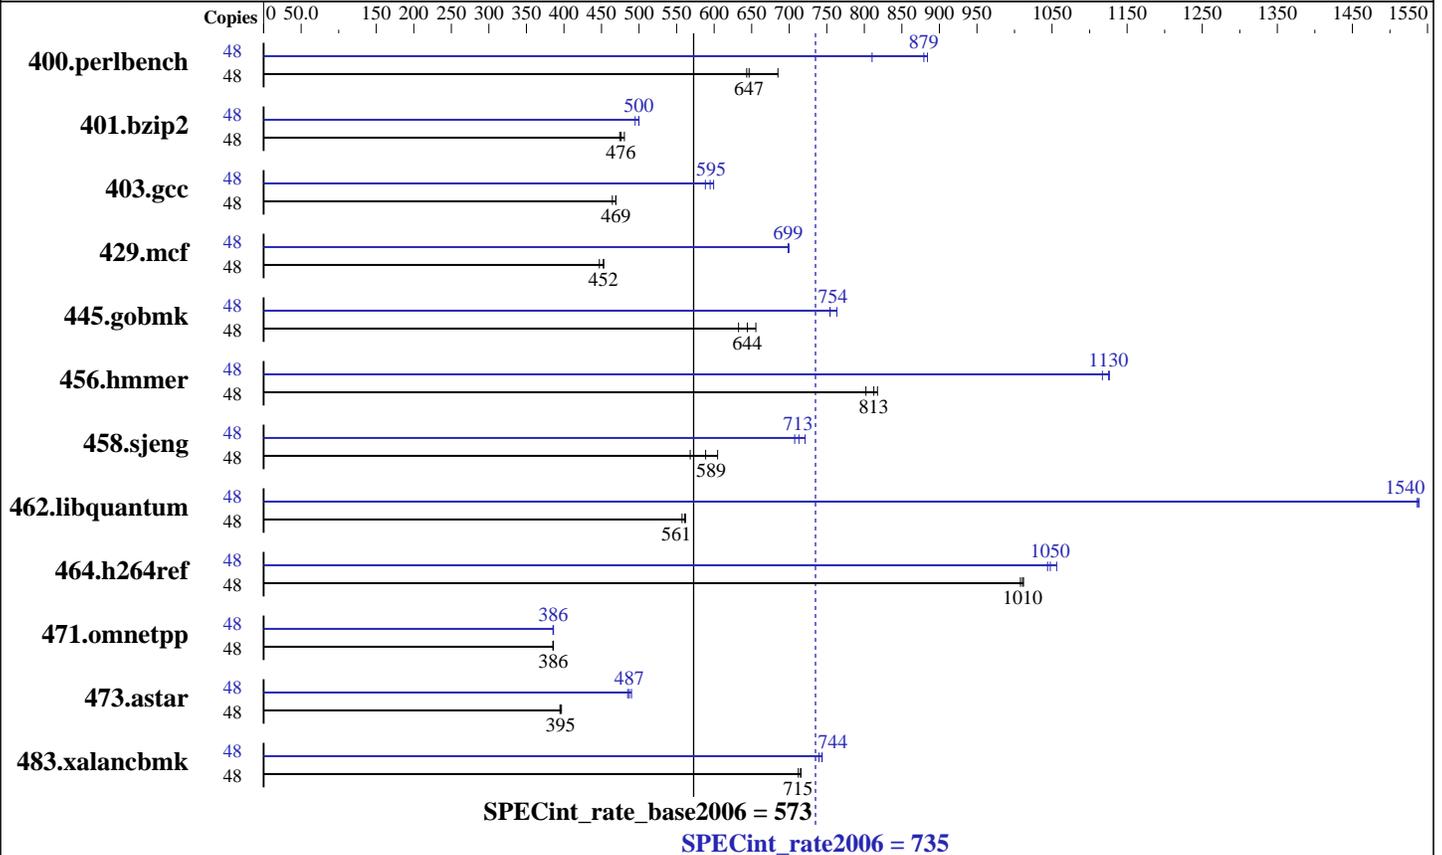

### Hardware

CPU Name: AMD Opteron 8431  
 CPU Characteristics:  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 48 cores, 8 chips, 6 cores/chip  
 CPU(s) orderable: 4,8 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (32x4 GB, PC2-6400 CL5)  
 Disk Subsystem: 4x72 GB 10K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0  
 x86 Open64 4.2.2 Compiler Suite  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 5 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 735

ProLiant DL785 G6  
(2.4 GHz AMD Opteron 8431)

SPECint\_rate\_base2006 = 573

CPU2006 license: 3

Test date: Jul-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	685	685	729	643	<u>725</u>	<u>647</u>	48	579	810	530	884	<u>533</u>	<u>879</u>
401.bzip2	48	964	480	<u>973</u>	<u>476</u>	977	474	48	936	495	<u>927</u>	<u>500</u>	927	500
403.gcc	48	<u>824</u>	<u>469</u>	832	464	824	469	48	645	599	<u>650</u>	<u>595</u>	657	588
429.mcf	48	979	447	<u>968</u>	<u>452</u>	966	453	48	<u>627</u>	<u>699</u>	627	699	626	700
445.gobmk	48	768	656	<u>782</u>	<u>644</u>	796	632	48	668	754	<u>667</u>	<u>754</u>	660	763
456.hammer	48	<u>551</u>	<u>813</u>	558	802	548	818	48	398	1130	401	1120	<u>398</u>	<u>1130</u>
458.sjeng	48	<u>987</u>	<u>589</u>	1022	568	961	605	48	821	707	805	721	<u>815</u>	<u>713</u>
462.libquantum	48	1770	562	<u>1774</u>	<u>561</u>	1785	557	48	647	1540	<u>647</u>	<u>1540</u>	646	1540
464.h264ref	48	1054	1010	1050	1010	<u>1051</u>	<u>1010</u>	48	1017	1040	1006	1060	<u>1014</u>	<u>1050</u>
471.omnetpp	48	779	385	<u>777</u>	<u>386</u>	777	386	48	<u>778</u>	<u>386</u>	777	386	778	385
473.astar	48	849	397	<u>852</u>	<u>395</u>	854	395	48	688	490	695	485	<u>692</u>	<u>487</u>
483.xalancbmk	48	<u>463</u>	<u>715</u>	465	712	463	716	48	448	740	<u>445</u>	<u>744</u>	445	744

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores and local memory.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr\_hugepages=21600 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_LIMIT = "450"  
LD\_LIBRARY\_PATH = "/SPECcpu2006\_Open64/amd0905is-libs/64:/SPECcpu2006\_Open64/amd0905is-libs/32"  
PGI\_HUGE\_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 735**

ProLiant DL785 G6  
(2.4 GHz AMD Opteron 8431)

**SPECint\_rate\_base2006 = 573**

**CPU2006 license:** 3

**Test date:** Jul-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Oct-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## General Notes (Continued)

<http://developer.amd.com/cpu/open64>.

## Base Compiler Invocation

C benchmarks:

openc

C++ benchmarks:

openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-march=barcelona -Ofast -CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m

C++ benchmarks:

-march=barcelona -Ofast -m32 -INLINE:aggressive=on  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks (except as noted below):

openc

456.hmmer: pgcc

C++ benchmarks (except as noted below):

openCC

473.astar: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 735

ProLiant DL785 G6  
(2.4 GHz AMD Opteron 8431)

SPECint\_rate\_base2006 = 573

CPU2006 license: 3

Test date: Jul-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Oct-2009

Tested by: Hewlett-Packard Company

Software Availability: Apr-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalanbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
           -OPT:unroll_size=0 -OPT:Ofast -OPT:goto=off
           -INLINE:aggressive=on -CG:local_sched_alg=1 -m3dnw
           -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -fb_create fbdata(pass 1)
         -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
         -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
         -HP:bdt=2m:heap=2m -GRA:unspill=on

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on
         -CG:gcm=off -GRA:prioritize_by_density=on -m32
         -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
           -OPT:unroll_times_max=8 -OPT:unroll_size=256
           -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
           -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
           -LNO:ignore_feedback=off -CG:p2align=on
           -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmer: -fastsse -Mvect=partial -Munroll=n:8 -Msmartalloc=huge
           -Msafeptr -Mprefetch=t0 -Mfprelaxed -Mipa=const -Mipa=ptr
           -Mipa=arg -Mipa=inline -tp shanghai-64 -Bstatic_pgi

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 735**

ProLiant DL785 G6  
(2.4 GHz AMD Opteron 8431)

**SPECint\_rate\_base2006 = 573**

**CPU2006 license:** 3

**Test date:** Jul-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Oct-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Apr-2009

## Peak Optimization Flags (Continued)

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -ipa -LNO:ignore\_feedback=off  
-LNO:full\_unroll=10 -LNO:fusion=0 -LNO:fission=2  
-IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on  
-HP:bdt=2m:heap=2m

462.libquantum: -march=barcelona -Ofast -LNO:pf2=0 -CG:gcm=off  
-CG:use\_prefetchnta=on -CG:cmp\_peep=on -WOPT:aggstr=0  
-HP:bdt=2m:heap=2m -OPT:alias=disjoint  
-INLINE:aggressive=on -IPA:space=1000 -IPA:plimit=20000

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -HP:bdt=2m:heap=2m

C++ benchmarks:

471.omnetpp: -march=barcelona -Ofast -CG:gcm=off -INLINE:aggressive=on  
-OPT:alias=disjoint -WOPT:if\_conv=0 -m32  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -fastsse -O4 -Msmartalloc=huge  
-Msafeptr=global -Mfprelaxed --zc\_eh -tp shanghai-32  
-Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-CG:cmp\_peep=on -GRA:unspill=on -TENV:frame\_pointer=off  
-L/root/work/libraries/SmartHeap-8.1/lib -lsmarheap

## Peak Other Flags

C benchmarks:

456.hmmmer: -Mipa=jobs:4

C++ benchmarks:

473.astar: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090901.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090901.html)

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.html>

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

ProLiant DL785 G6  
(2.4 GHz AMD Opteron 8431)

**SPECint\_rate2006 = 735**

**SPECint\_rate\_base2006 = 573**

**CPU2006 license:** 3

**Test sponsor:** Hewlett-Packard Company

**Tested by:** Hewlett-Packard Company

**Test date:** Jul-2009

**Hardware Availability:** Oct-2009

**Software Availability:** Apr-2009

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090901.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090901.xml)

<http://www.spec.org/cpu2006/flags/hp-amd-linux-flags.xml>

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:09:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 September 2009.