



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55


Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

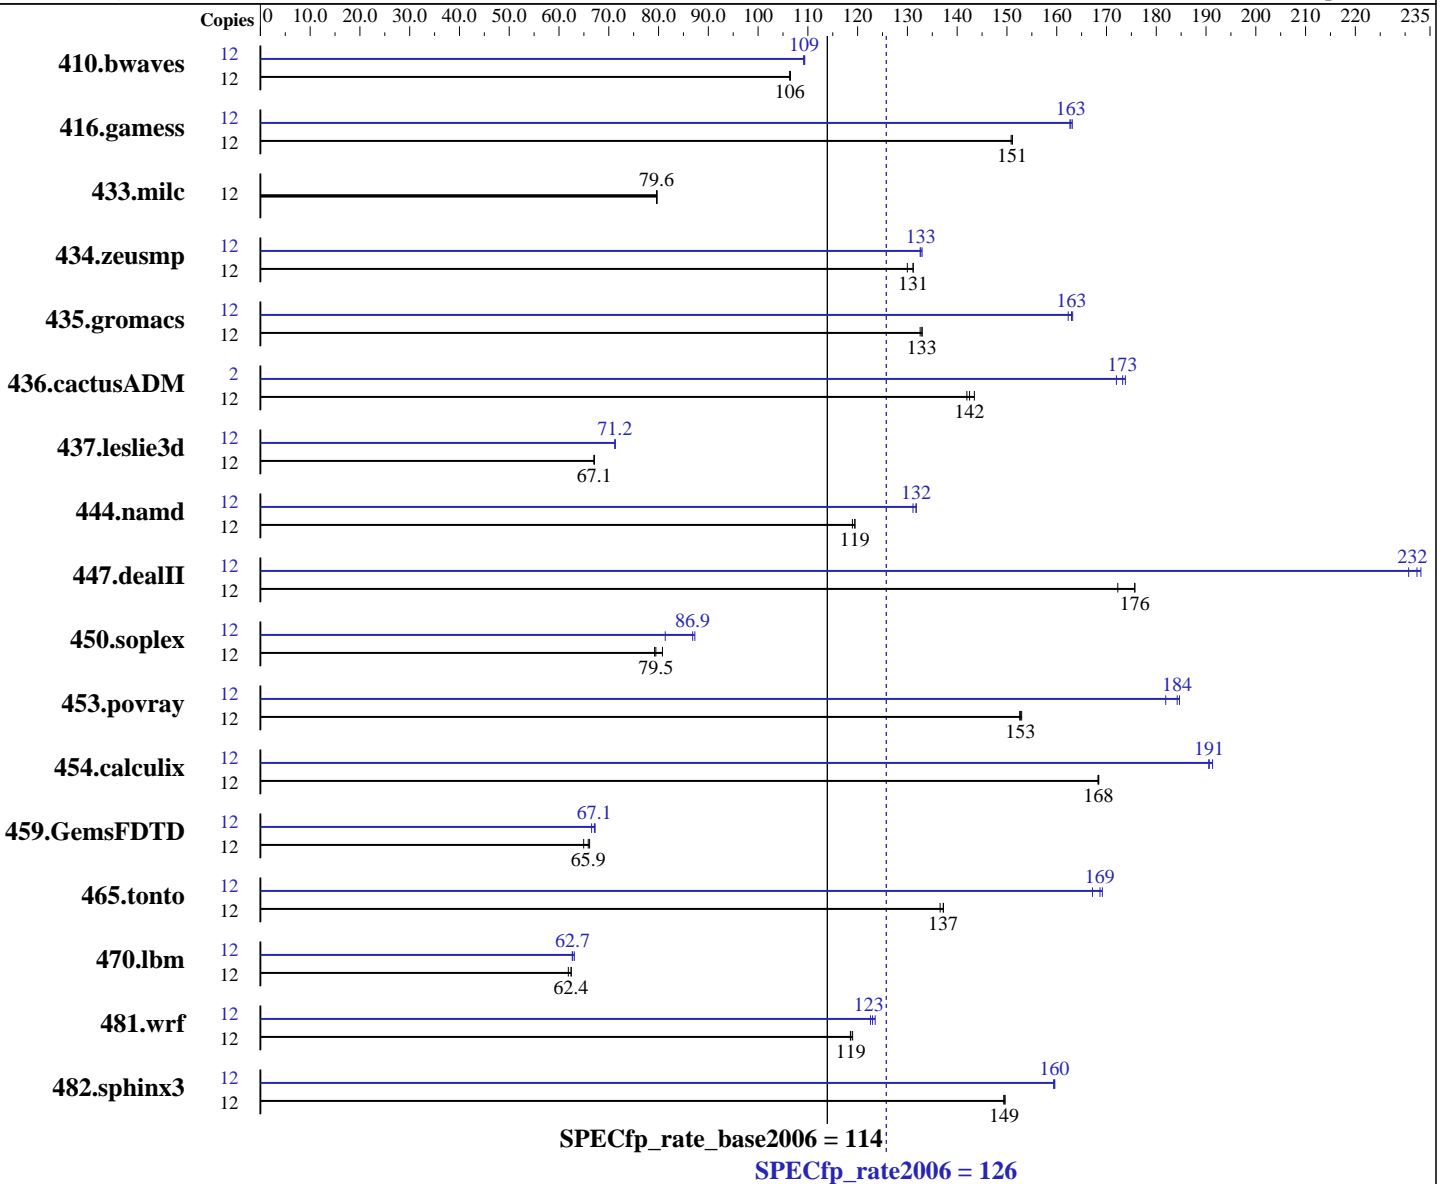

Hardware

CPU Name: AMD Opteron 2423 HE
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB DDR2-800)
Disk Subsystem: 1 x 73 GB 15000 RPM SAS
Other Hardware: None

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	12	<u>1533</u>	<u>106</u>	1533	106	1531	107	12	<u>1492</u>	<u>109</u>	1491	109	1494	109
416.gamess	12	1555	151	<u>1555</u>	<u>151</u>	1558	151	12	1440	163	1445	163	<u>1443</u>	<u>163</u>
433.milc	12	1383	79.7	1383	79.6	<u>1383</u>	<u>79.6</u>	12	1383	79.7	1383	79.6	<u>1383</u>	<u>79.6</u>
434.zeusmp	12	840	130	<u>833</u>	<u>131</u>	833	131	12	821	133	<u>823</u>	<u>133</u>	824	133
435.gromacs	12	646	133	644	133	<u>645</u>	<u>133</u>	12	528	162	525	163	<u>526</u>	<u>163</u>
436.cactusADM	12	1000	143	<u>1006</u>	<u>142</u>	1010	142	2	<u>138</u>	<u>173</u>	139	172	138	174
437.leslie3d	12	1683	67.0	<u>1682</u>	<u>67.1</u>	1681	67.1	12	1584	71.2	<u>1583</u>	<u>71.2</u>	1582	71.3
444.namd	12	809	119	806	119	<u>806</u>	<u>119</u>	12	734	131	730	132	<u>731</u>	<u>132</u>
447.dealII	12	<u>781</u>	<u>176</u>	781	176	797	172	12	595	231	<u>591</u>	<u>232</u>	589	233
450.soplex	12	<u>1260</u>	<u>79.5</u>	1264	79.2	1239	80.8	12	1230	81.3	1146	87.3	<u>1152</u>	<u>86.9</u>
453.povray	12	418	153	<u>418</u>	<u>153</u>	417	153	12	351	182	346	185	<u>347</u>	<u>184</u>
454.calculix	12	588	168	<u>588</u>	<u>168</u>	588	168	12	517	191	520	191	<u>519</u>	<u>191</u>
459.GemsFDTD	12	<u>1933</u>	<u>65.9</u>	1960	65.0	1925	66.1	12	1913	66.6	1893	67.3	<u>1897</u>	<u>67.1</u>
465.tonto	12	<u>861</u>	<u>137</u>	860	137	865	137	12	706	167	698	169	<u>700</u>	<u>169</u>
470.lbm	12	2665	61.9	2640	62.4	<u>2641</u>	<u>62.4</u>	12	<u>2628</u>	<u>62.7</u>	2631	62.7	2614	63.1
481.wrf	12	1131	119	1126	119	<u>1130</u>	<u>119</u>	12	<u>1090</u>	<u>123</u>	1094	123	1085	124
482.sphinx3	12	1563	150	1566	149	<u>1565</u>	<u>149</u>	12	<u>1466</u>	<u>160</u>	1467	159	1465	160

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd0905is-libs/64:/root/cpu2006-1.1/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.deallI: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
-Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
-tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

447.dealll: -march=barcelona -Ofast -static -INLINE:aggressive=on
-LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
-GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
-CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
-HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
-Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
-Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
-Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

454.calculix (continued):

-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge

-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64

-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.html

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

<http://www.spec.org/cpu2006/flags/amd-platform.20090914.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090914.xml

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>

<http://www.spec.org/cpu2006/flags/amd-platform.20090914.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp_rate2006 = 126

PowerEdge M605 (AMD Opteron 2423 HE, 2.00 GHz)

SPECfp_rate_base2006 = 114

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Aug-2009

Hardware Availability: Aug-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:41:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 September 2009.