



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®2006 = 37.9

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECint\_base2006 = 33.8

CPU2006 license: 55


Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: May-2009

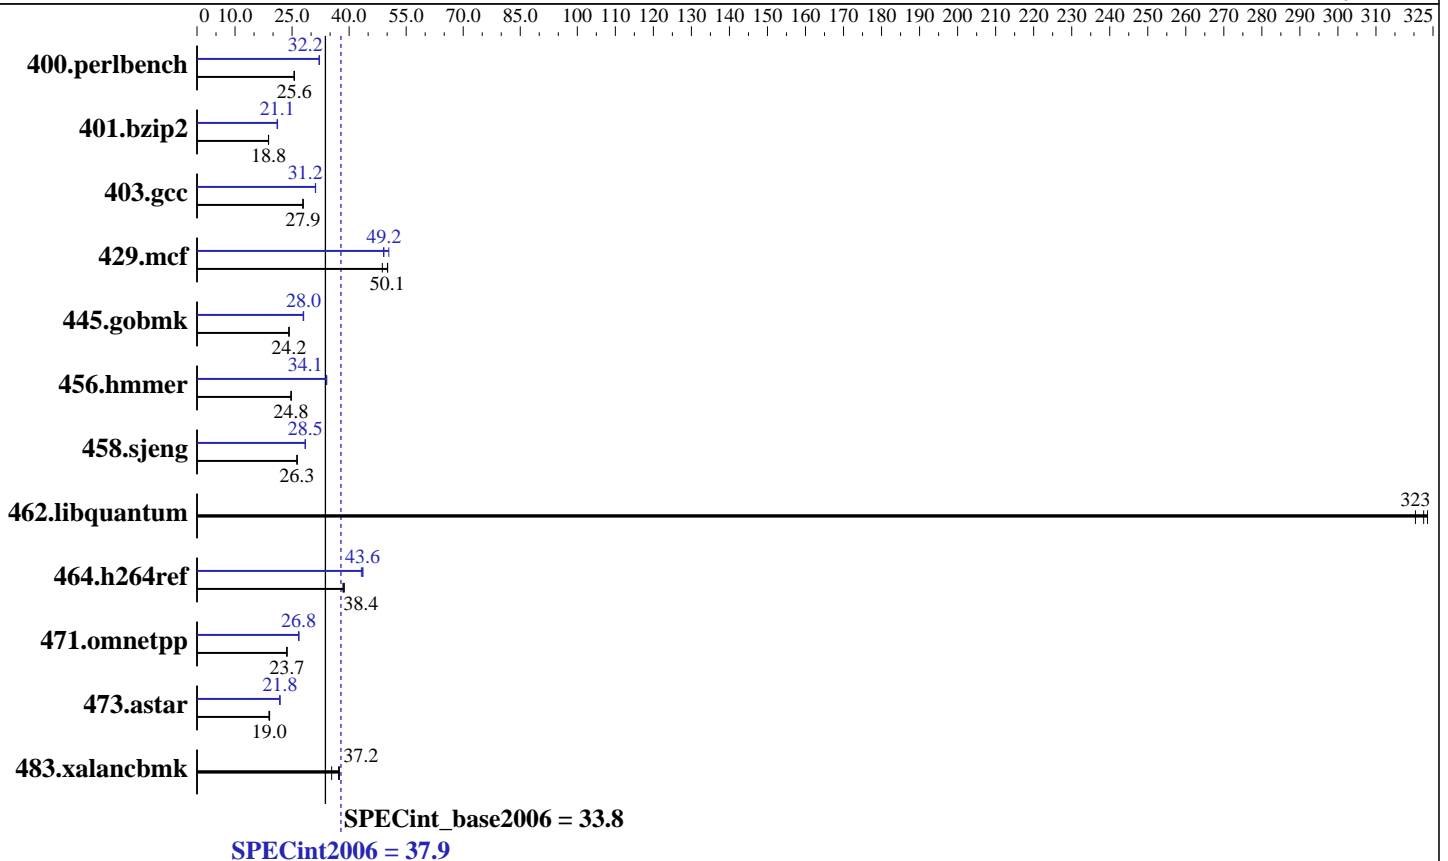

## Hardware

CPU Name: Intel Xeon W5590  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3-10600R)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Client release 5.3, Kernel 2.6.18-128.el5 on an x86\_64  
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20090131 Package ID: l\_cproc\_p\_11.0.080  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.9

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECint\_base2006 = 33.8

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Aug-2009  
Hardware Availability: Aug-2009  
Software Availability: May-2009

## Results Table

| Benchmark      | Base              |                    |                    |                    |                   |                    | Peak              |                    |                    |                    |                   |                    |
|----------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|-------------------|--------------------|--------------------|--------------------|-------------------|--------------------|
|                | Seconds           | Ratio              | Seconds            | Ratio              | Seconds           | Ratio              | Seconds           | Ratio              | Seconds            | Ratio              | Seconds           | Ratio              |
| 400.perlbench  | 382               | 25.5               | <b><u>382</u></b>  | <b><u>25.6</u></b> | 382               | 25.6               | <b><u>304</u></b> | <b><u>32.2</u></b> | 303                | 32.2               | 304               | 32.1               |
| 401.bzip2      | 514               | 18.8               | 512                | 18.8               | <b><u>513</u></b> | <b><u>18.8</u></b> | 455               | 21.2               | 458                | 21.1               | <b><u>456</u></b> | <b><u>21.1</u></b> |
| 403.gcc        | 289               | 27.9               | 289                | 27.9               | <b><u>289</u></b> | <b><u>27.9</u></b> | 259               | 31.1               | <b><u>258</u></b>  | <b><u>31.2</u></b> | 258               | 31.2               |
| 429.mcf        | 187               | 48.7               | <b><u>182</u></b>  | <b><u>50.1</u></b> | 182               | 50.1               | <b><u>186</u></b> | <b><u>49.2</u></b> | 181                | 50.4               | 186               | 49.0               |
| 445.gobmk      | <b><u>434</u></b> | <b><u>24.2</u></b> | 434                | 24.2               | 433               | 24.2               | 376               | 27.9               | <b><u>375</u></b>  | <b><u>28.0</u></b> | 374               | 28.0               |
| 456.hammer     | 377               | 24.7               | 377                | 24.8               | <b><u>377</u></b> | <b><u>24.8</u></b> | 274               | 34.1               | <b><u>274</u></b>  | <b><u>34.1</u></b> | 274               | 34.1               |
| 458.sjeng      | 460               | 26.3               | 460                | 26.3               | <b><u>460</u></b> | <b><u>26.3</u></b> | 425               | 28.5               | <b><u>425</u></b>  | <b><u>28.5</u></b> | 425               | 28.5               |
| 462.libquantum | 64.7              | 320                | <b><u>64.2</u></b> | <b><u>323</u></b>  | 64.0              | 324                | 64.7              | 320                | <b><u>64.2</u></b> | <b><u>323</u></b>  | 64.0              | 324                |
| 464.h264ref    | 576               | 38.4               | 571                | 38.7               | <b><u>576</u></b> | <b><u>38.4</u></b> | 507               | 43.6               | <b><u>508</u></b>  | <b><u>43.6</u></b> | 512               | 43.2               |
| 471.omnetpp    | 265               | 23.6               | 264                | 23.7               | <b><u>264</u></b> | <b><u>23.7</u></b> | <b><u>233</u></b> | <b><u>26.8</u></b> | 233                | 26.8               | 234               | 26.7               |
| 473.astar      | 371               | 18.9               | <b><u>369</u></b>  | <b><u>19.0</u></b> | 368               | 19.1               | 322               | 21.8               | 322                | 21.8               | <b><u>322</u></b> | <b><u>21.8</u></b> |
| 483.xalancbmk  | 184               | 37.4               | 195                | 35.4               | <b><u>185</u></b> | <b><u>37.2</u></b> | 184               | 37.4               | 195                | 35.4               | <b><u>185</u></b> | <b><u>37.2</u></b> |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

BIOS Settings:  
Memory Node Interleaving: NUMA  
Hyper-threading: ENABLE

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Base Compiler Invocation

C benchmarks:  
icc  
  
C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.9

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECint\_base2006 = 33.8

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: May-2009

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc
```

```
401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

```
458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc
```

C++ benchmarks (except as noted below):

```
icpc
```

```
473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc
```

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.9

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECint\_base2006 = 33.8

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: May-2009

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
 -opt-malloc-options=3

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32  
 -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint2006 = 37.9

Dell Precision T7500 (Intel Xeon W5590, 3.33 GHz)

SPECint\_base2006 = 33.8

CPU2006 license: 55

Test date: Aug-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: May-2009

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.flags.ic11.0.lin.20090915.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.flags.ic11.0.lin.20090915.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:46:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 15 September 2009.