



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E2  
(Intel Xeon L5520, 2.26 GHz)

SPECfp<sup>®</sup>2006 = 31.4

SPECfp\_base2006 = 29.6

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Sep-2009

Hardware Availability: Jul-2009

Software Availability: Feb-2009

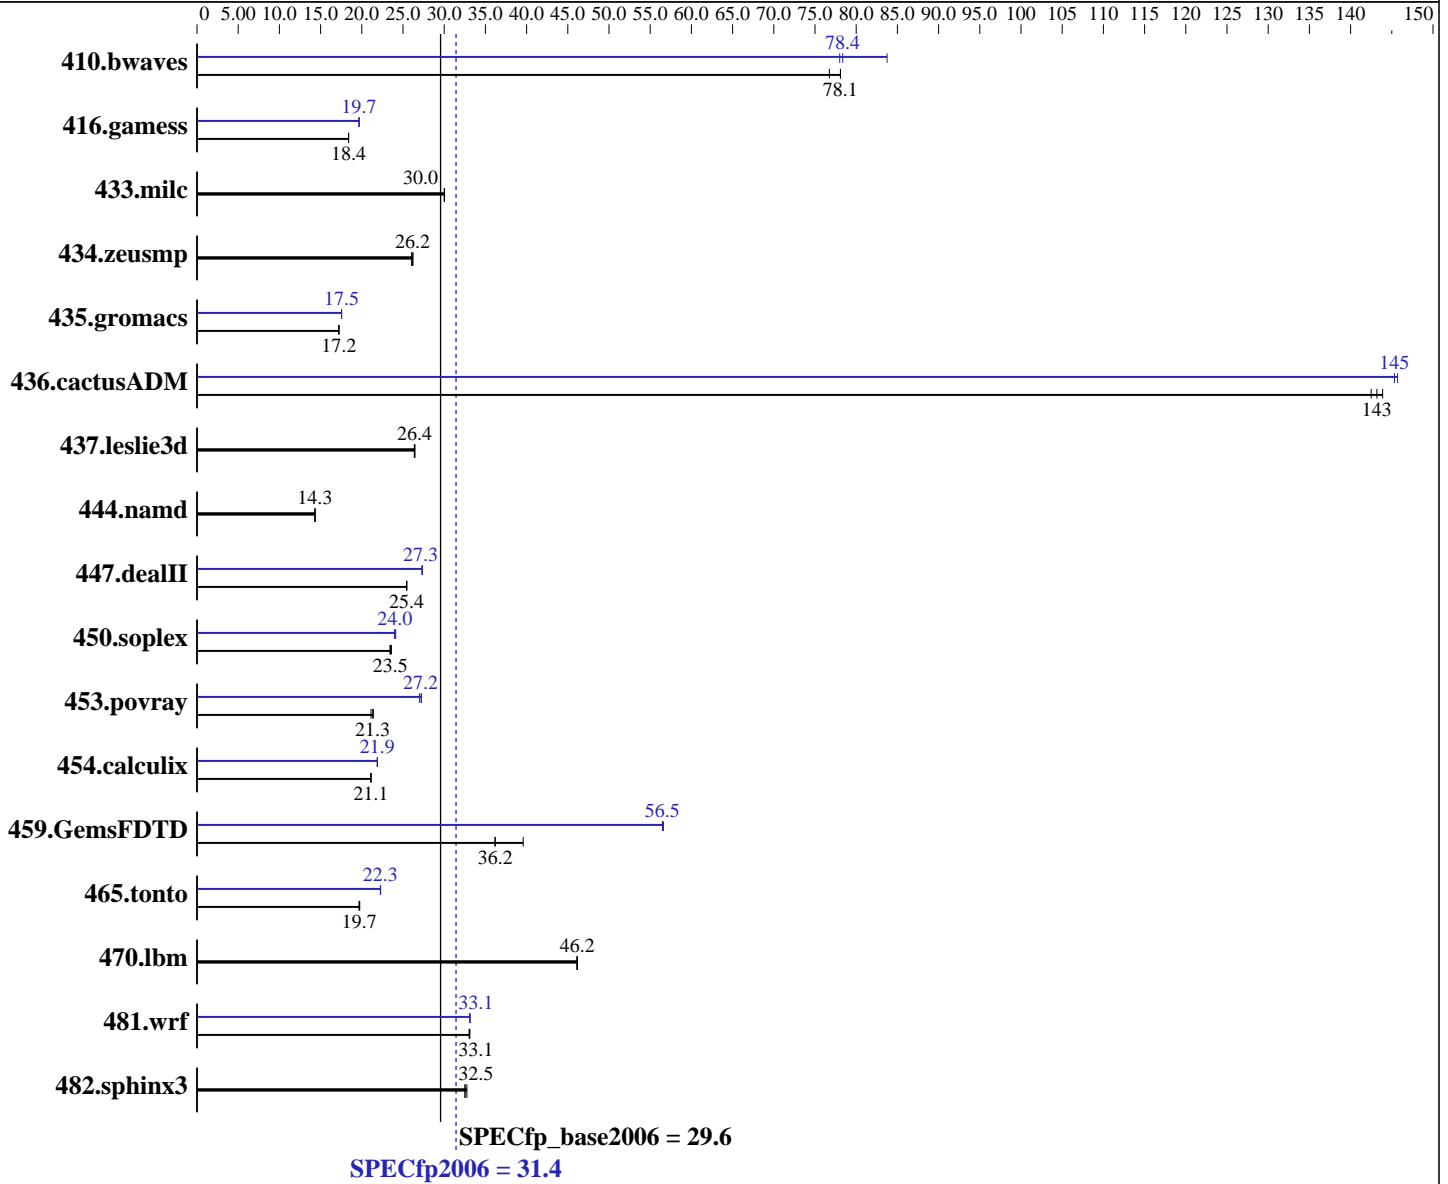

### Hardware

CPU Name: Intel Xeon L5520  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ and Fortran Compiler Professional 11.0 for Linux  
 Build 20090131 Package ID: l\_cproc\_p\_11.0.081, l\_cprof\_p\_11.0.081  
 Auto Parallel: Yes  
 File System: ReiserFS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E2  
(Intel Xeon L5520, 2.26 GHz)

SPECfp2006 = 31.4

SPECfp\_base2006 = 29.6

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Sep-2009

Hardware Availability: Jul-2009

Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 X 4 GB PC3-8500R, 2 rank, CL7, ECC)  
Disk Subsystem: 1x146.5 GB SAS, 15000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	177	76.7	174	78.1	<b><u>174</u></b>	<b><u>78.1</u></b>	174	78.0	<b><u>173</u></b>	<b><u>78.4</u></b>	162	83.8
416.gamess	1065	18.4	<b><u>1064</u></b>	<b><u>18.4</u></b>	1064	18.4	995	19.7	<b><u>995</u></b>	<b><u>19.7</u></b>	997	19.6
433.milc	306	30.0	306	30.0	<b><u>306</u></b>	<b><u>30.0</u></b>	306	30.0	306	30.0	<b><u>306</u></b>	<b><u>30.0</u></b>
434.zeusmp	349	26.0	347	26.2	<b><u>347</u></b>	<b><u>26.2</u></b>	349	26.0	347	26.2	<b><u>347</u></b>	<b><u>26.2</u></b>
435.gromacs	<b><u>415</u></b>	<b><u>17.2</u></b>	415	17.2	415	17.2	407	17.6	407	17.5	<b><u>407</u></b>	<b><u>17.5</u></b>
436.cactusADM	<b><u>83.5</u></b>	<b><u>143</u></b>	83.1	144	83.9	142	82.0	146	<b><u>82.2</u></b>	<b><u>145</u></b>	82.2	145
437.leslie3d	356	26.4	<b><u>356</u></b>	<b><u>26.4</u></b>	356	26.4	356	26.4	<b><u>356</u></b>	<b><u>26.4</u></b>	356	26.4
444.namd	560	14.3	560	14.3	<b><u>560</u></b>	<b><u>14.3</u></b>	560	14.3	560	14.3	<b><u>560</u></b>	<b><u>14.3</u></b>
447.dealII	450	25.4	449	25.5	<b><u>450</u></b>	<b><u>25.4</u></b>	<b><u>419</u></b>	<b><u>27.3</u></b>	419	27.3	418	27.3
450.soplex	<b><u>355</u></b>	<b><u>23.5</u></b>	356	23.4	353	23.6	346	24.1	348	24.0	<b><u>347</u></b>	<b><u>24.0</u></b>
453.povray	<b><u>249</u></b>	<b><u>21.3</u></b>	252	21.1	249	21.4	195	27.2	197	27.0	<b><u>196</u></b>	<b><u>27.2</u></b>
454.calculix	391	21.1	391	21.1	<b><u>391</u></b>	<b><u>21.1</u></b>	377	21.9	377	21.9	<b><u>377</u></b>	<b><u>21.9</u></b>
459.GemsFDTD	293	36.2	<b><u>293</u></b>	<b><u>36.2</u></b>	268	39.6	187	56.6	188	56.5	<b><u>188</u></b>	<b><u>56.5</u></b>
465.tonto	498	19.7	500	19.7	<b><u>499</u></b>	<b><u>19.7</u></b>	442	22.3	441	22.3	<b><u>442</u></b>	<b><u>22.3</u></b>
470.lbm	<b><u>298</u></b>	<b><u>46.2</u></b>	298	46.1	298	46.2	<b><u>298</u></b>	<b><u>46.2</u></b>	298	46.1	298	46.2
481.wrf	<b><u>337</u></b>	<b><u>33.1</u></b>	338	33.0	337	33.1	<b><u>337</u></b>	<b><u>33.1</u></b>	338	33.1	337	33.2
482.sphinx3	595	32.8	599	32.5	<b><u>599</u></b>	<b><u>32.5</u></b>	595	32.8	599	32.5	<b><u>599</u></b>	<b><u>32.5</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M

## Platform Notes

BIOS setting:  
NUMA configuration : Enabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E2  
(Intel Xeon L5520, 2.26 GHz)

SPECfp2006 = 31.4

SPECfp\_base2006 = 29.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Sep-2009  
Hardware Availability: Jul-2009  
Software Availability: Feb-2009

### General Notes

The NEC Express5800/R120a-1(Intel Xeon L5520),  
the NEC Express5800/R120a-2(Intel Xeon L5520),  
the Bull NovaScale R440 E2 (Intel Xeon L5520, 2.26 GHz) and  
the Bull NovaScale R460 E2 (Intel Xeon L5520, 2.26 GHz) models are electronically equivalent.  
The results have been measured on a NEC Express5800/R120a-1(Intel Xeon L5520) model.

### Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E2  
(Intel Xeon L5520, 2.26 GHz)

SPECfp2006 = 31.4

SPECfp\_base2006 = 29.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Sep-2009  
Hardware Availability: Jul-2009  
Software Availability: Feb-2009

## Base Optimization Flags (Continued)

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks (except as noted below):

icpc

450.soplex: icpc -m32

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E2  
(Intel Xeon L5520, 2.26 GHz)

SPECfp2006 = 31.4

SPECfp\_base2006 = 29.6

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: NEC Corporation

Test date: Sep-2009  
Hardware Availability: Jul-2009  
Software Availability: Feb-2009

## Peak Optimization Flags

### C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: basepeak = yes

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 E2  
(Intel Xeon L5520, 2.26 GHz)

SPECfp2006 = 31.4

SPECfp\_base2006 = 29.6

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** NEC Corporation

**Test date:** Sep-2009  
**Hardware Availability:** Jul-2009  
**Software Availability:** Feb-2009

## Peak Optimization Flags (Continued)

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.html>  
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revH.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revE.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 02:59:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 September 2009.