



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp®2006 = 33.7

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp\_base2006 = 32.8

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Sep-2009

Hardware Availability: Aug-2009

Software Availability: Jul-2009

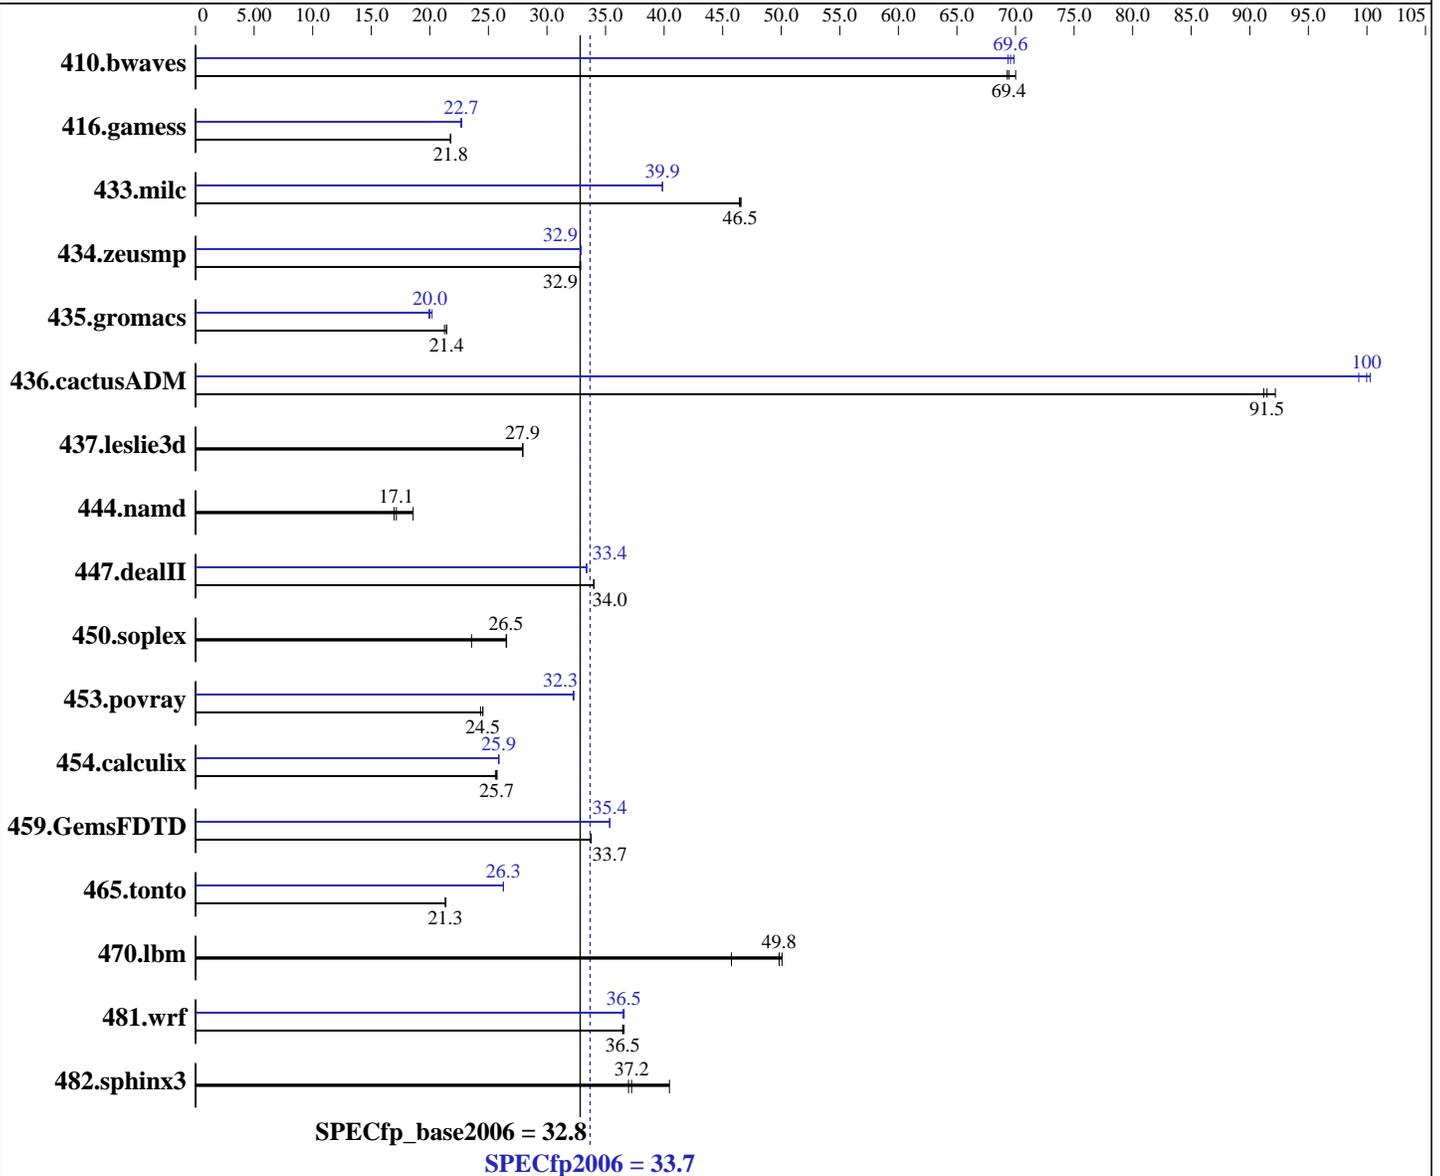

### Hardware

CPU Name: Intel Xeon X3450  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: Intel Fortran Compiler and Intel C++ Compiler Professional Edition 11.1 For Linux Build 20090511 Package ID: l\_cproc\_p\_11.1.040, l\_cprof\_p\_11.1.040  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 33.7

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp\_base2006 = 32.8

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)  
Disk Subsystem: 1 x 160 GB 7200 RPM SATA  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	194	70.0	<b>196</b>	<b>69.4</b>	196	69.3	<b>195</b>	<b>69.6</b>	196	69.4	195	69.9
416.gamess	899	21.8	<b>900</b>	<b>21.8</b>	900	21.8	864	22.7	<b>863</b>	<b>22.7</b>	862	22.7
433.milc	<b>197</b>	<b>46.5</b>	198	46.4	197	46.6	<b>230</b>	<b>39.9</b>	230	39.8	230	39.9
434.zeusmp	<b>277</b>	<b>32.9</b>	277	32.9	277	32.8	<b>277</b>	<b>32.9</b>	277	32.9	277	32.9
435.gromacs	336	21.2	<b>333</b>	<b>21.4</b>	333	21.4	<b>357</b>	<b>20.0</b>	354	20.2	358	19.9
436.cactusADM	130	92.2	<b>131</b>	<b>91.5</b>	131	91.2	<b>120</b>	<b>100</b>	120	99.3	119	100
437.leslie3d	336	27.9	<b>337</b>	<b>27.9</b>	337	27.9	336	27.9	<b>337</b>	<b>27.9</b>	337	27.9
444.namd	<b>468</b>	<b>17.1</b>	473	17.0	432	18.6	<b>468</b>	<b>17.1</b>	473	17.0	432	18.6
447.dealII	336	34.0	<b>336</b>	<b>34.0</b>	336	34.0	343	33.4	<b>343</b>	<b>33.4</b>	343	33.4
450.soplex	354	23.6	<b>315</b>	<b>26.5</b>	314	26.6	354	23.6	<b>315</b>	<b>26.5</b>	314	26.6
453.povray	<b>217</b>	<b>24.5</b>	217	24.5	219	24.3	<b>165</b>	<b>32.3</b>	165	32.2	165	32.3
454.calculix	321	25.7	<b>321</b>	<b>25.7</b>	322	25.6	319	25.9	319	25.9	<b>319</b>	<b>25.9</b>
459.GemsFDTD	<b>314</b>	<b>33.7</b>	314	33.7	314	33.8	300	35.4	<b>300</b>	<b>35.4</b>	300	35.4
465.tonto	461	21.3	<b>461</b>	<b>21.3</b>	460	21.4	374	26.3	375	26.3	<b>374</b>	<b>26.3</b>
470.lbm	274	50.1	<b>276</b>	<b>49.8</b>	300	45.7	274	50.1	<b>276</b>	<b>49.8</b>	300	45.7
481.wrf	<b>306</b>	<b>36.5</b>	305	36.6	306	36.5	<b>306</b>	<b>36.5</b>	306	36.5	305	36.6
482.sphinx3	482	40.5	527	37.0	<b>524</b>	<b>37.2</b>	482	40.5	527	37.0	<b>524</b>	<b>37.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 33.7

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp\_base2006 = 32.8

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
The Dell PowerEdge T110 and the Bull NovaScale T810 F2 models are electronically equivalent.  
This result was measured on a Dell PowerEdge T110.

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 33.7

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp\_base2006 = 32.8

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Base Optimization Flags (Continued)

Fortran benchmarks:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

Benchmarks using both Fortran and C:

`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `basepeak = yes`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealII: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -opt-prefetch`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 33.7

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp\_base2006 = 32.8

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Peak Optimization Flags (Continued)

450.soplex: basepeak = yes

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: Same as 410.bwaves

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 33.7

PowerEdge T110 (Intel Xeon X3450, 2.66 GHz)

SPECfp\_base2006 = 32.8

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Aug-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:42:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 December 2009.