



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 108

PowerEdge T310 (Intel Xeon X3440, 2.53 GHz)

SPECint_rate_base2006 = 99.2

CPU2006 license: 55


Test date: Nov-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

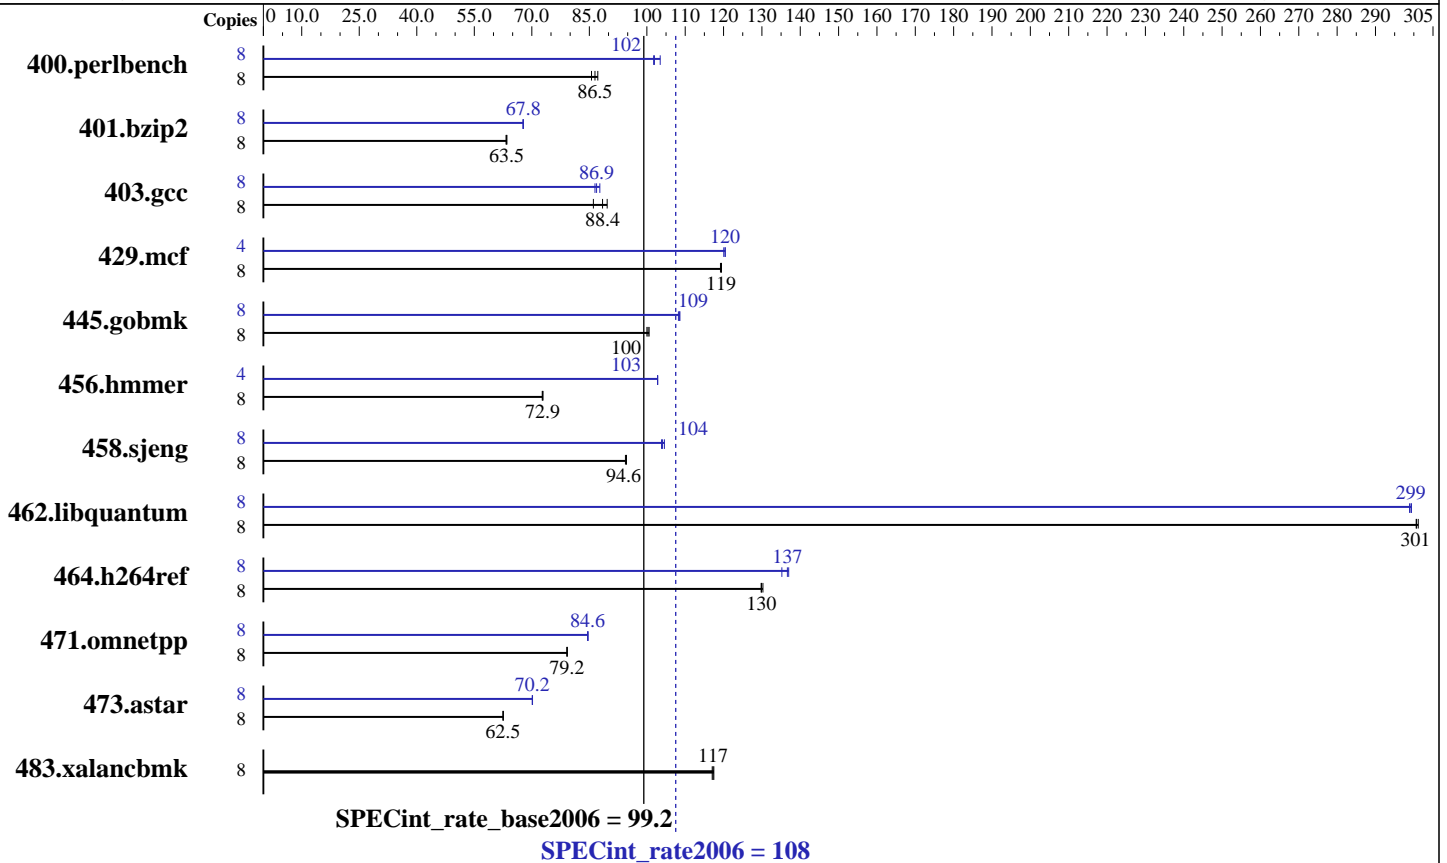

Hardware

CPU Name: Intel Xeon X3440
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz
 CPU MHz: 2533
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR RDIMM)
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: Intel C++ Compiler Professional Edition 11.1 for Linux Build 20090511 Package ID: I_cproc_p_11.1.040
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 108

PowerEdge T310 (Intel Xeon X3440, 2.53 GHz)

SPECint_rate_base2006 = 99.2

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2009
Hardware Availability: Sep-2009
Software Availability: Jul-2009

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	896	87.2	904	86.5	913	85.6	8	755	103	768	102	766	102
401.bzip2	8	1220	63.3	1217	63.5	1216	63.5	8	1139	67.8	1140	67.7	1139	67.8
403.gcc	8	728	88.4	748	86.1	718	89.6	8	741	86.9	734	87.7	745	86.5
429.mcf	8	611	119	611	119	612	119	4	303	120	304	120	303	120
445.gobmk	8	834	101	837	100	839	100	8	775	108	773	109	773	109
456.hammer	8	1026	72.7	1024	72.9	1024	72.9	4	363	103	363	103	363	103
458.sjeng	8	1025	94.4	1022	94.7	1023	94.6	8	926	105	930	104	932	104
462.libquantum	8	550	301	551	301	551	301	8	555	299	554	299	554	299
464.h264ref	8	1364	130	1359	130	1363	130	8	1292	137	1309	135	1296	137
471.omnetpp	8	632	79.2	631	79.2	631	79.2	8	591	84.6	590	84.7	591	84.6
473.astar	8	898	62.6	899	62.5	898	62.5	8	801	70.2	801	70.1	800	70.2
483.xalancbmk	8	471	117	470	117	472	117	8	471	117	470	117	472	117

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge T310 and the Bull NovaScale T820 F2 models are electronically equivalent.
This result was measured on a Dell PowerEdge T310.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 108

PowerEdge T310 (Intel Xeon X3440, 2.53 GHz)

SPECint_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Nov-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 108

PowerEdge T310 (Intel Xeon X3440, 2.53 GHz)

SPECint_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Nov-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3
429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 108

PowerEdge T310 (Intel Xeon X3440, 2.53 GHz)

SPECint_rate_base2006 = 99.2

CPU2006 license: 55

Test date: Nov-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
          -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64
```

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 03:51:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.