



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®2006 = 29.1

NovaScale R410 F2 (Intel Xeon X3450, 2.66 GHz)

SPECint_base2006 = 25.1

CPU2006 license: 20


Test date: Oct-2009

Test sponsor: Bull SAS

Hardware Availability: Dec-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

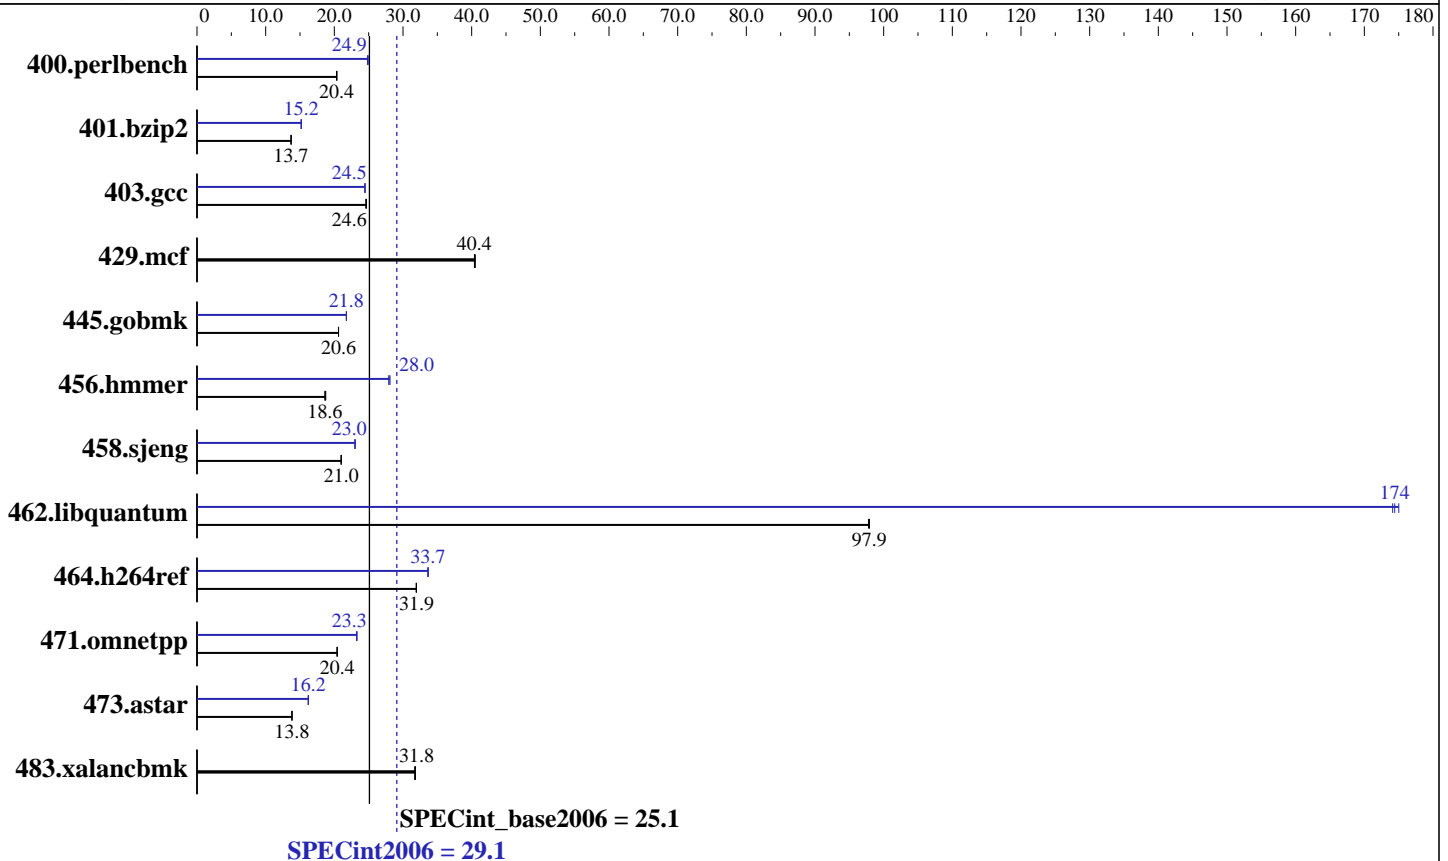

Hardware

CPU Name: Intel Xeon X3450
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2667
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: Intel C++ Compiler Professional Edition 11.1 for Linux
 Build 20090511 Package ID: l_cproc_p_11.1.040
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = **29.1**

NovaScale R410 F2 (Intel Xeon X3450, 2.66 GHz)

SPECint_base2006 = **25.1**

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Oct-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>480</u>	<u>20.4</u>	481	20.3	480	20.4	392	24.9	<u>392</u>	<u>24.9</u>	394	24.8
401.bzip2	704	13.7	<u>704</u>	<u>13.7</u>	704	13.7	636	15.2	636	15.2	<u>636</u>	<u>15.2</u>
403.gcc	<u>327</u>	<u>24.6</u>	326	24.7	327	24.6	329	24.5	329	24.5	<u>329</u>	<u>24.5</u>
429.mcf	226	40.4	<u>226</u>	<u>40.4</u>	225	40.5	226	40.4	<u>226</u>	<u>40.4</u>	225	40.5
445.gobmk	509	20.6	<u>509</u>	<u>20.6</u>	509	20.6	482	21.8	482	21.8	<u>482</u>	<u>21.8</u>
456.hammer	<u>500</u>	<u>18.6</u>	498	18.8	501	18.6	<u>334</u>	<u>28.0</u>	334	27.9	332	28.1
458.sjeng	576	21.0	<u>576</u>	<u>21.0</u>	576	21.0	<u>526</u>	<u>23.0</u>	526	23.0	526	23.0
462.libquantum	212	97.8	212	97.9	<u>212</u>	<u>97.9</u>	<u>119</u>	<u>174</u>	118	175	119	174
464.h264ref	693	32.0	693	31.9	<u>693</u>	<u>31.9</u>	<u>657</u>	<u>33.7</u>	658	33.6	657	33.7
471.omnetpp	306	20.4	306	20.4	<u>306</u>	<u>20.4</u>	268	23.3	<u>269</u>	<u>23.3</u>	269	23.3
473.astar	507	13.8	508	13.8	<u>507</u>	<u>13.8</u>	<u>433</u>	<u>16.2</u>	433	16.2	433	16.2
483.xalancbmk	218	31.7	217	31.8	<u>217</u>	<u>31.8</u>	218	31.7	217	31.8	<u>217</u>	<u>31.8</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
The Dell PowerEdge R210 (Intel Xeon X3450, 2.66 GHz) and
the Bull NovaScale R410 F2 (Intel Xeon X3450, 2.66 GHz) models are electronically equivalent.
The results have been measured on a Dell PowerEdge R210 (Intel Xeon X3450, 2.66 GHz) model.

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 29.1

NovaScale R410 F2 (Intel Xeon X3450, 2.66 GHz)

SPECint_base2006 = 25.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Oct-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -inline-calloc
-opt-malloc-options=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 29.1

NovaScale R410 F2 (Intel Xeon X3450, 2.66 GHz)

SPECint_base2006 = 25.1

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Oct-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -auto-ilp32 -opt-prefetch
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3
429.mcf: basepeak = yes
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch -inline-calloc
-opt-malloc-options=3
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint2006 = 29.1

NovaScale R410 F2 (Intel Xeon X3450, 2.66 GHz)

SPECint_base2006 = 25.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Oct-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
           -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 04:02:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 December 2009.