



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint®_rate2006 = 120

NovaScale T820 F2 (Intel Xeon X3470, 2.93 GHz)

SPECint_rate_base2006 = 110

CPU2006 license: 20


Test date: Nov-2009

Test sponsor: Bull SAS

Hardware Availability: Dec-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

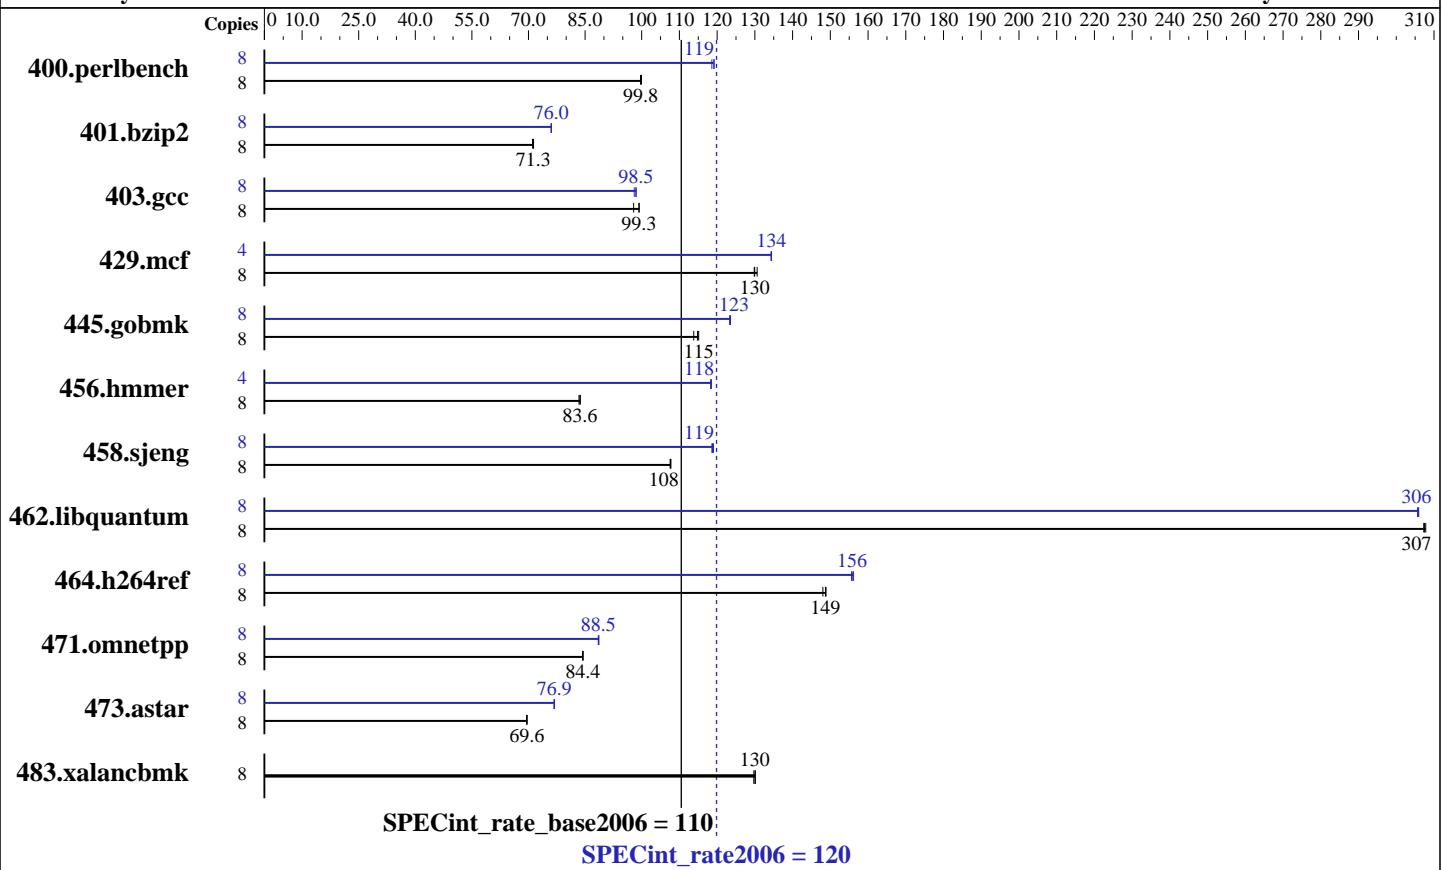

Hardware

CPU Name: Intel Xeon X3470
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR RDIMM)
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: Intel C++ Compiler Professional Edition 11.1 for Linux Build 20090511 Package ID: l_cproc_p_11.1.040
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECint_rate2006 = 120

NovaScale T820 F2 (Intel Xeon X3470, 2.93 GHz)

SPECint_rate_base2006 = 110

CPU2006 license: 20

Test date: Nov-2009

Test sponsor: Bull SAS

Hardware Availability: Dec-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	782	100	784	99.7	783	99.8	8	659	119	656	119	656	119
401.bzip2	8	1083	71.3	1086	71.1	1082	71.3	8	1015	76.1	1016	76.0	1016	76.0
403.gcc	8	649	99.3	648	99.3	658	97.9	8	653	98.5	657	98.0	654	98.5
429.mcf	8	561	130	559	131	562	130	4	271	134	271	134	272	134
445.gobmk	8	731	115	737	114	729	115	8	680	123	679	124	680	123
456.hmmer	8	895	83.4	892	83.6	891	83.7	4	315	118	315	118	316	118
458.sjeng	8	900	108	899	108	898	108	8	815	119	813	119	816	119
462.libquantum	8	539	307	539	308	539	307	8	542	306	542	306	542	306
464.h264ref	8	1196	148	1190	149	1189	149	8	1134	156	1136	156	1138	156
471.omnetpp	8	592	84.4	592	84.5	593	84.4	8	565	88.5	564	88.7	565	88.5
473.astar	8	806	69.6	808	69.5	807	69.6	8	731	76.9	732	76.7	730	76.9
483.xalancbmk	8	425	130	426	130	424	130	8	425	130	426	130	424	130

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)

General Notes

The Dell PowerEdge T310 (Intel Xeon X3470 2.93 GHz) and
the Bull NovaScale T820 F2 (Intel Xeon X3470 2.93 GHz) models are electronically equivalent.
The results have been measured on a Dell PowerEdge T310 (Intel Xeon X3470 2.93 GHz) model.

Base Compiler Invocation

C benchmarks:
icc -m32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T820 F2 (Intel Xeon X3470, 2.93 GHz)

SPECint_rate2006 = 120

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Nov-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T820 F2 (Intel Xeon X3470, 2.93 GHz)

SPECint_rate2006 = 120

SPECint_rate_base2006 = 110

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Nov-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -opt-prefetch -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
  -opt-malloc-options=3

429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
  -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
  -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
  -opt-malloc-options=3 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
  -prof-use(pass 2) -unroll12 -ansi-alias
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
  -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
  -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale T820 F2 (Intel Xeon X3470, 2.93 GHz)

SPECint_rate2006 = 120

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Nov-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

471.omnetpp (continued):

-L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:55:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.