



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint[®]2006 = 27.6

Acer AT110 F1 (Intel Xeon E3110)

SPECint_base2006 = 24.7

CPU2006 license: 97


Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2009

Hardware Availability: Dec-2009

Software Availability: Nov-2008

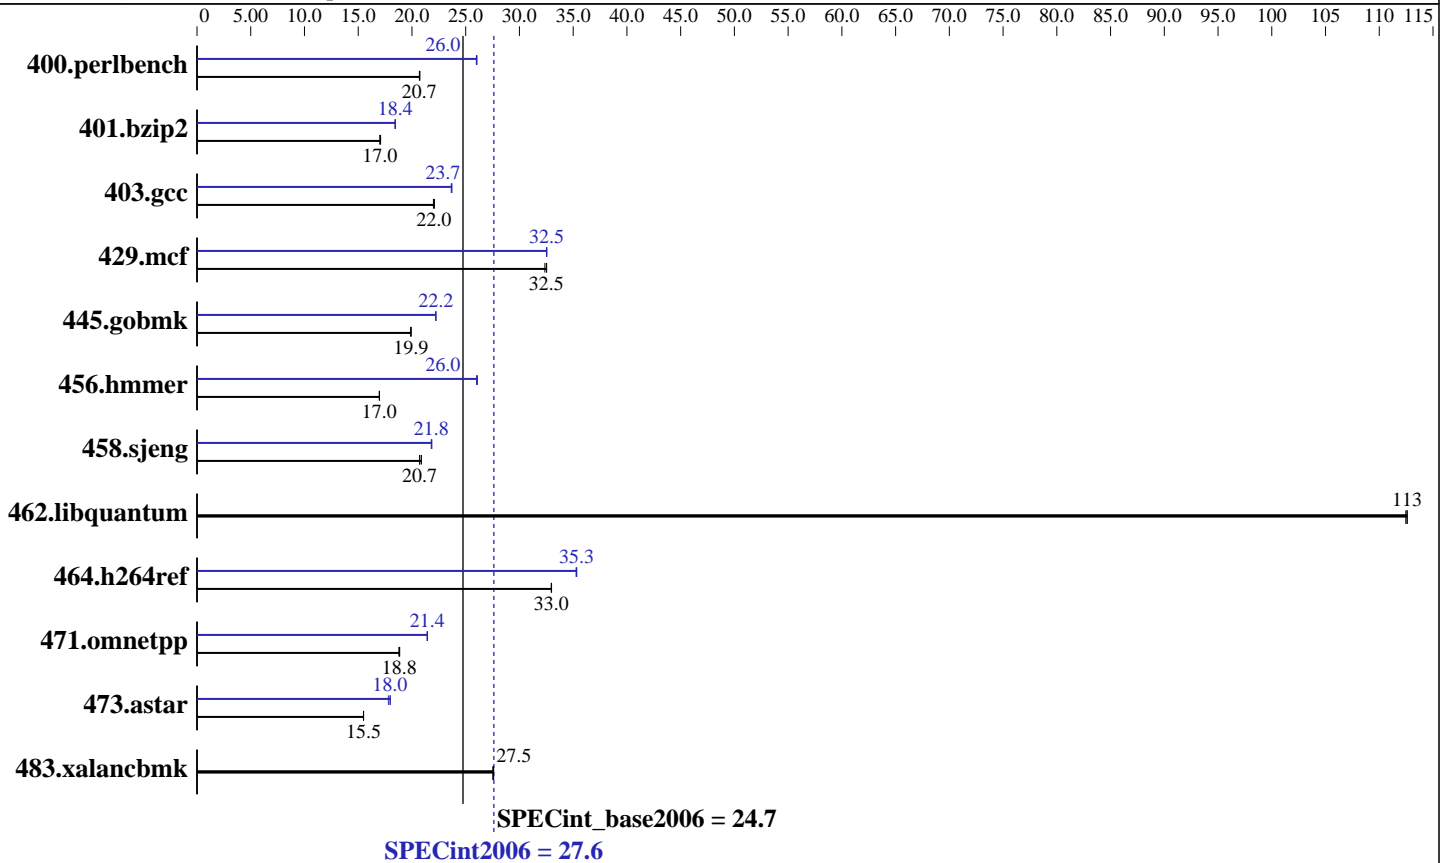

Hardware

CPU Name: Intel Xeon E3110
 CPU Characteristics: 1333 MHz system bus
 CPU MHz: 3000
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 8 GB (4 x 2048 MB ECC Unbuffered DDR2-800 CL5)
 Disk Subsystem: 1 x 640 GB 7200RPM SATA HDD
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Sserver 11 (x86_64)
 Kernel 2.6.27.19-5
 Compiler: Intel C++ Compiler 11.0 for Linux
 Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Multi-user, level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint2006 = 27.6

Acer AT110 F1 (Intel Xeon E3110)

SPECint_base2006 = 24.7

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2009

Hardware Availability: Dec-2009

Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<u>472</u>	<u>20.7</u>	471	20.7	472	20.7	376	26.0	<u>375</u>	<u>26.0</u>	375	26.0
401.bzip2	565	17.1	<u>567</u>	<u>17.0</u>	567	17.0	523	18.4	<u>523</u>	<u>18.4</u>	523	18.4
403.gcc	365	22.1	<u>365</u>	<u>22.0</u>	366	22.0	340	23.7	340	23.7	<u>340</u>	<u>23.7</u>
429.mcf	282	32.4	280	32.5	<u>281</u>	<u>32.5</u>	280	32.5	280	32.5	<u>280</u>	<u>32.5</u>
445.gobmk	527	19.9	527	19.9	<u>527</u>	<u>19.9</u>	<u>472</u>	<u>22.2</u>	472	22.2	472	22.2
456.hammer	550	17.0	<u>550</u>	<u>17.0</u>	550	17.0	359	26.0	358	26.1	<u>358</u>	<u>26.0</u>
458.sjeng	579	20.9	584	20.7	<u>584</u>	<u>20.7</u>	554	21.9	<u>555</u>	<u>21.8</u>	555	21.8
462.libquantum	184	112	<u>184</u>	<u>113</u>	184	113	184	112	<u>184</u>	<u>113</u>	184	113
464.h264ref	<u>671</u>	<u>33.0</u>	671	33.0	671	33.0	<u>627</u>	<u>35.3</u>	626	35.3	627	35.3
471.omnetpp	331	18.9	<u>332</u>	<u>18.8</u>	333	18.8	<u>291</u>	<u>21.4</u>	292	21.4	291	21.4
473.astar	<u>453</u>	<u>15.5</u>	453	15.5	453	15.5	390	18.0	<u>391</u>	<u>18.0</u>	394	17.8
483.xalancbmk	250	27.6	<u>250</u>	<u>27.5</u>	251	27.5	250	27.6	<u>250</u>	<u>27.5</u>	251	27.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was set for stacksize unlimited

General Notes

OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"

This result was measured on the Gateway GT110 F1.
The Acer AT110 F1 and Gateway GT110 F1 are electronically equivalent.

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECint2006 =	27.6
Acer AT110 F1 (Intel Xeon E3110)	SPECint_base2006 =	24.7

CPU2006 license: 97	Test date:	Nov-2009
Test sponsor: Acer Incorporated	Hardware Availability:	Dec-2009
Tested by: Acer Incorporated	Software Availability:	Nov-2008

Base Portability Flags (Continued)

483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

401.bzip2: -DSPEC_CPU_LP64

456.hmmer: -DSPEC_CPU_LP64

462.libquantum: -DSPEC_CPU_LINUX

483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECint2006 = 27.6

Acer AT110 F1 (Intel Xeon E3110)

SPECint_base2006 = 24.7

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Nov-2009

Hardware Availability: Dec-2009

Software Availability: Nov-2008

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	SPECint2006 =	27.6
Acer AT110 F1 (Intel Xeon E3110)	SPECint_base2006 =	24.7

CPU2006 license: 97	Test date: Nov-2009
Test sponsor: Acer Incorporated	Hardware Availability: Dec-2009
Tested by: Acer Incorporated	Software Availability: Nov-2008

The flags file that was used to format this result can be browsed at
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.20100119.html>

You can also download the XML flags source by saving the following link:
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.20100119.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
 For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
 Report generated on Wed Jul 23 05:57:06 2014 by SPEC CPU2006 PS/PDF formatter v6932.
 Originally published on 9 February 2010.