



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC Enterprise M3000

**SPECint®2006 =**

**14.8**

**SPECint\_base2006 =**

**13.6**

CPU2006 license: 19

Test sponsor: Fujitsu


Tested by: Fujitsu

**Test date:**

Oct-2009

**Hardware Availability:** Jan-2010

**Software Availability:** Oct-2009

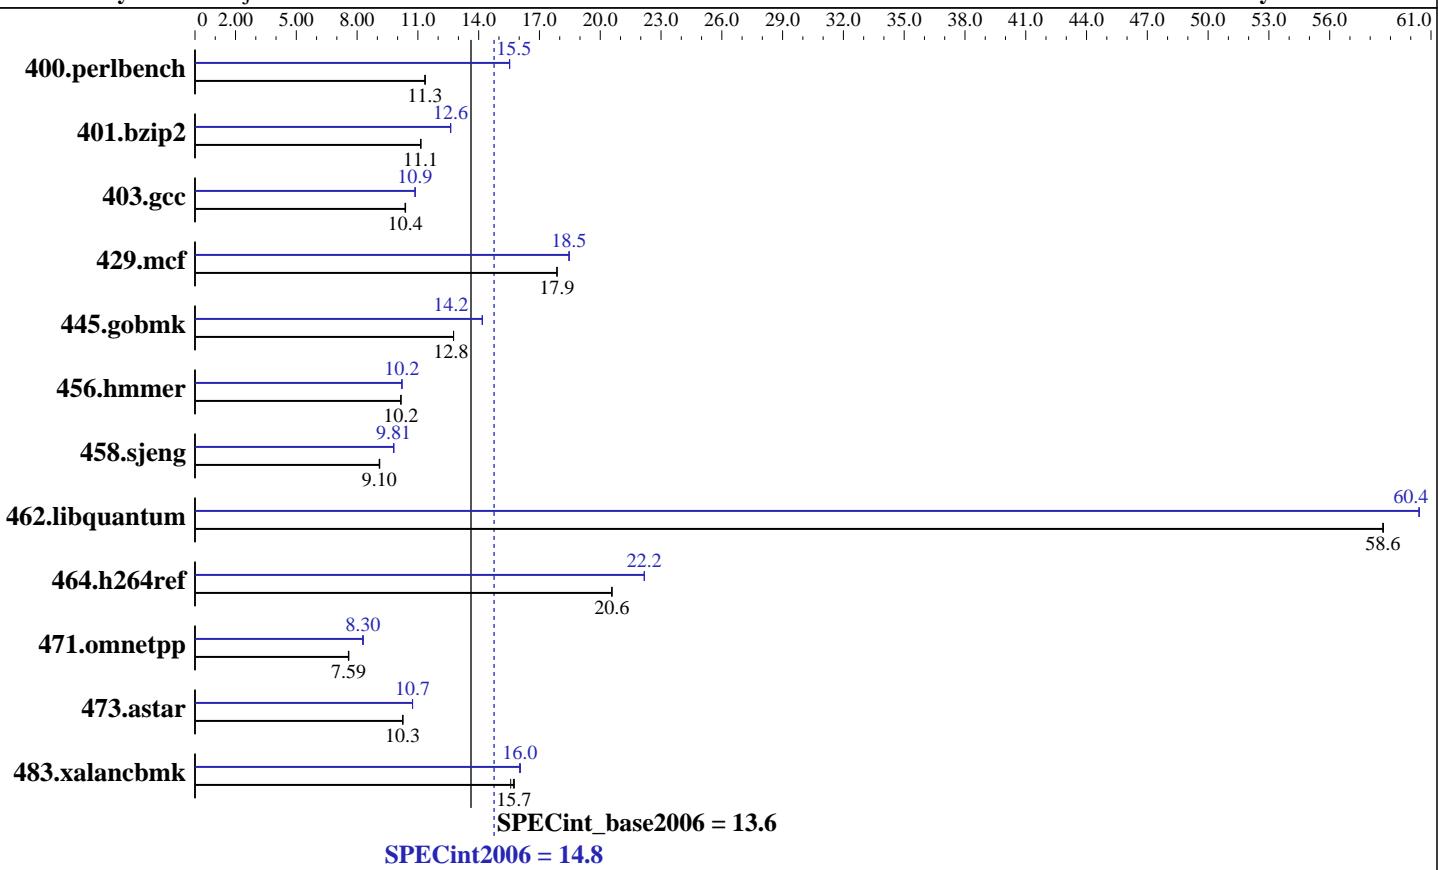

<b>Hardware</b>	
CPU Name:	SPARC64 VII
CPU Characteristics:	
CPU MHz:	2750
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	5 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2 GB), 2-way interleaved
Disk Subsystem:	1 x Seagate Savvio 10K.2 (146 GB 10,000 RPM SAS)
Other Hardware:	None

<b>Software</b>	
Operating System:	Solaris 10 10/09 with patch 119963-18
Compiler:	Sun Studio 12 Update 1
Auto Parallel:	No
File System:	ufs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECint2006 = 14.8**

Fujitsu SPARC Enterprise M3000

**SPECint\_base2006 = 13.6**

CPU2006 license: 19

Test date: Oct-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	<b>861</b>	<b>11.3</b>	861	11.3	860	11.4	<b>629</b>	<b>15.5</b>	<b>629</b>	<b>15.5</b>	629	15.5
401.bzip2	866	11.1	866	11.1	<b>866</b>	<b>11.1</b>	<b>765</b>	<b>12.6</b>	<b>765</b>	<b>12.6</b>	765	12.6
403.gcc	775	10.4	776	10.4	<b>775</b>	<b>10.4</b>	<b>741</b>	<b>10.9</b>	741	10.9	741	10.9
429.mcf	510	17.9	<b>510</b>	<b>17.9</b>	510	17.9	494	18.5	<b>494</b>	<b>18.5</b>	494	18.5
445.gobmk	<b>822</b>	<b>12.8</b>	822	12.8	822	12.8	<b>740</b>	<b>14.2</b>	740	14.2	740	14.2
456.hmmer	918	10.2	<b>918</b>	<b>10.2</b>	918	10.2	<b>913</b>	<b>10.2</b>	914	10.2	913	10.2
458.sjeng	1327	9.12	1330	9.10	<b>1330</b>	<b>9.10</b>	1234	9.80	<b>1233</b>	<b>9.81</b>	1233	9.81
462.libquantum	353	58.6	<b>353</b>	<b>58.6</b>	353	58.7	343	60.4	343	60.4	<b>343</b>	<b>60.4</b>
464.h264ref	<b>1076</b>	<b>20.6</b>	1075	20.6	1076	20.6	998	22.2	998	22.2	<b>998</b>	<b>22.2</b>
471.omnetpp	825	7.57	<b>824</b>	<b>7.59</b>	824	7.59	<b>755</b>	<b>8.27</b>	<b>753</b>	<b>8.30</b>	<b>753</b>	<b>8.30</b>
473.astar	<b>685</b>	<b>10.3</b>	684	10.3	685	10.3	<b>654</b>	<b>10.7</b>	654	10.7	654	10.7
483.xalancbmk	<b>439</b>	<b>15.7</b>	438	15.8	443	15.6	<b>430</b>	<b>16.1</b>	431	16.0	<b>430</b>	<b>16.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

Sun Studio compiler patches are available at  
[http://developers.sun.com/sunstudio/downloads/patches/ss12u1\\_patches.jsp](http://developers.sun.com/sunstudio/downloads/patches/ss12u1_patches.jsp)

## Submit Notes

The config file option 'submit' was used. Processes were assigned to specific processors using 'pbind' commands. The list of processors to use was provided in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)

## Operating System Notes

Shell Environments:

```
ulimit -s 131072 was used to limit the space consumed
by the stack.(making more space available for the heap)
```

System Tunables:  
(/etc/system parameters)

```
tune_t_fsflushr=10
Controls how many seconds elapse between runs of the
page flush daemon, fsflush.
autoup=600
Causes pages older than the listed number of seconds to
be written by fsflush.
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECint2006 = 14.8**

Fujitsu SPARC Enterprise M3000

**SPECint\_base2006 = 13.6**

CPU2006 license: 19

Test date: Oct-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Oct-2009

## Operating System Notes (Continued)

bufhwm=3000

Memory byte limit for caching I/O buffers.

segmap\_percent=1

Set maximum percent memory for file system cache.

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

## Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server. Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

## Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Base Optimization Flags

C benchmarks:

-fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=2  
-xalias\_level=std -M /usr/lib/ld/map.bssalign -ll2amm

C++ benchmarks:

-xdepend -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
-xprefetch\_level=2 -xalias\_level=compatible -M /usr/lib/ld/map.bssalign  
-lfast



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECint2006 = 14.8**

Fujitsu SPARC Enterprise M3000

**SPECint\_base2006 = 13.6**

CPU2006 license: 19

**Test date:** Oct-2009

Test sponsor: Fujitsu

**Hardware Availability:** Jan-2010

Tested by: Fujitsu

**Software Availability:** Oct-2009

## Base Other Flags

C benchmarks:

-xjobs=2 -V -#

C++ benchmarks:

-xjobs=2 -verbose=diags,version

## Peak Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

cc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_SOLARIS\_SPARC

403.gcc: -DSPEC\_CPU\_SOLARIS

462.libquantum: -DSPEC\_CPU\_SOLARIS

483.xalancbmk: -DSPEC\_CPU\_SOLARIS

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -M /usr/lib/ld/map.bssalign -xipo=2  
-xalias\_level=std -xrestrict -Xc -xprefetch=no%auto  
-lfast

401.bzip2: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=strong -xprefetch=latx:0.9

403.gcc: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xarch=sparcv3 -xalias\_level=std  
-xprefetch\_auto\_type=indirect\_array\_access  
-xprefetch\_level=2 -ll2amm

429.mcf: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xprefetch\_level=3 -W2,-Apf:llist=3  
-W2,-Apf:noinnerllist -Wc,-Qlp-prt=1 -Wc,-Qlp-prwt=3

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

Fujitsu SPARC Enterprise M3000

SPECint2006 =

14.8

SPECint\_base2006 =

13.6

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date:

Oct-2009

Hardware Availability:

Jan-2010

Software Availability:

Oct-2009

## Peak Optimization Flags (Continued)

429.mcf (continued):  
-lfast

445.gobmk: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=std -xrestrict -ll2amm

456.hmmr: -fast -fma=fused -xpagesize=4M -xipo=2 -xalias\_level=std  
-xprefetch=latx:2.5 -ll2amm

458sjeng: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xprefetch=latx:0.5 -ll2amm

462.libquantum: -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch\_level=2  
-xalias\_level=std -xprefetch=latx:0.5  
-M /usr/lib/ld/map.bssalign -ll2amm

464.h264ref: -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xipo=2 -xalias\_level=std -xprefetch=no  
-ll2amm

C++ benchmarks:

471.omnetpp: -xdepend -library=stlport4  
-xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=compatible -xipo=2  
-xprefetch\_level=2 -Qoption cg -Qlp-av=0  
-xprefetch=latx:2.0 -lfast

473.astar: -xdepend -library=stlport4  
-xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -fma=fused  
-xpagesize=4M -xalias\_level=compatible  
-M /usr/lib/ld/map.bssalign -xipo=2 -xprefetch=no%auto  
-lfast -lbsdmalloc

483.xalancbmk: -xdepend -library=stlport4 -fast -fma=fused -xpagesize=4M  
-xalias\_level=compatible -xipo=2 -xprefetch\_level=3 -lfast

## Peak Other Flags

C benchmarks:

-xjobs=2 -V -#

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

**SPECint2006 = 14.8**

Fujitsu SPARC Enterprise M3000

**SPECint\_base2006 = 13.6**

**CPU2006 license:** 19

**Test date:** Oct-2009

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2010

**Tested by:** Fujitsu

**Software Availability:** Oct-2009

## Peak Other Flags (Continued)

C++ benchmarks:

-xjobs=2 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r4.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:10:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2010.