



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

### SPECfp<sup>®</sup>\_rate2006 = 71.3

### PRIMERGY TX150 S7, Intel Xeon L3426, 1.86 GHz

### SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Nov-2009

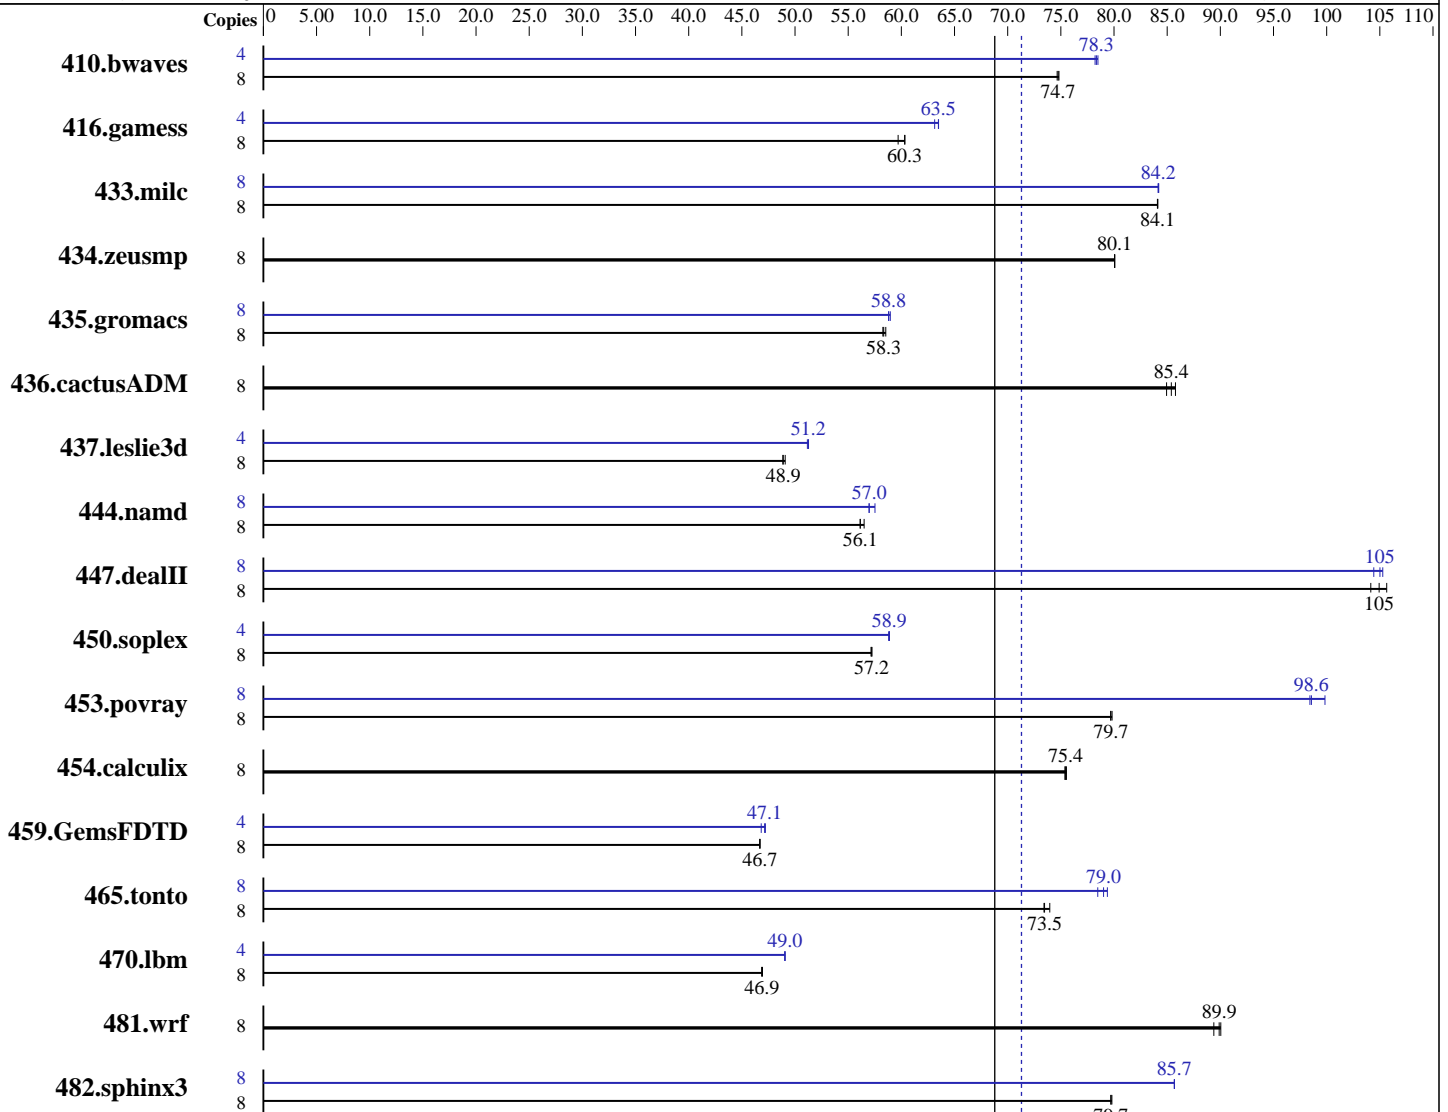

SPECfp\_rate\_base2006 = 68.8

SPECfp\_rate2006 = 71.3

### Hardware

CPU Name: Intel Xeon L3426  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 1867  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: l\_cproc\_p\_11.1.059, l\_cprof\_p\_11.1.059  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-User Run Level 3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = 71.3

PRIMERGY TX150 S7, Intel Xeon L3426, 1.86 GHz

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (4x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)  
Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1453	74.8	<b><u>1455</u></b>	<b><u>74.7</u></b>	1456	74.7	4	695	78.2	<b><u>694</u></b>	<b><u>78.3</u></b>	693	78.5
416.gamess	8	2596	60.3	2624	59.7	<b><u>2597</u></b>	<b><u>60.3</u></b>	4	<b><u>1234</u></b>	<b><u>63.5</u></b>	1241	63.1	1233	63.5
433.milc	8	<b><u>873</u></b>	<b><u>84.1</u></b>	873	84.1	873	84.1	8	<b><u>872</u></b>	<b><u>84.2</u></b>	873	84.1	872	84.2
434.zeusmp	8	<b><u>909</u></b>	<b><u>80.1</u></b>	909	80.1	909	80.1	8	<b><u>909</u></b>	<b><u>80.1</u></b>	909	80.1	909	80.1
435.gromacs	8	<b><u>979</u></b>	<b><u>58.3</u></b>	980	58.3	976	58.5	8	971	58.8	969	59.0	<b><u>971</u></b>	<b><u>58.8</u></b>
436.cactusADM	8	<b><u>1120</u></b>	<b><u>85.4</u></b>	1125	84.9	1114	85.8	8	<b><u>1120</u></b>	<b><u>85.4</u></b>	1125	84.9	1114	85.8
437.leslie3d	8	1532	49.1	1539	48.9	<b><u>1538</u></b>	<b><u>48.9</u></b>	4	735	51.2	<b><u>734</u></b>	<b><u>51.2</u></b>	733	51.3
444.namd	8	1136	56.5	1143	56.1	<b><u>1143</u></b>	<b><u>56.1</u></b>	8	1115	57.5	1126	57.0	<b><u>1126</u></b>	<b><u>57.0</u></b>
447.dealII	8	879	104	<b><u>872</u></b>	<b><u>105</u></b>	866	106	8	876	104	869	105	<b><u>872</u></b>	<b><u>105</u></b>
450.soplex	8	1168	57.1	<b><u>1166</u></b>	<b><u>57.2</u></b>	1166	57.2	4	567	58.9	<b><u>567</u></b>	<b><u>58.9</u></b>	567	58.8
453.povray	8	533	79.8	534	79.7	<b><u>534</u></b>	<b><u>79.7</u></b>	8	<b><u>432</u></b>	<b><u>98.6</u></b>	426	99.8	432	98.4
454.calculix	8	876	75.4	874	75.5	<b><u>875</u></b>	<b><u>75.4</u></b>	8	876	75.4	874	75.5	<b><u>875</u></b>	<b><u>75.4</u></b>
459.GemsFDTD	8	<b><u>1818</u></b>	<b><u>46.7</u></b>	1818	46.7	1817	46.7	4	906	46.8	<b><u>900</u></b>	<b><u>47.1</u></b>	899	47.2
465.tonto	8	1064	74.0	1072	73.4	<b><u>1072</u></b>	<b><u>73.5</u></b>	8	1003	78.5	<b><u>996</u></b>	<b><u>79.0</u></b>	992	79.4
470.lbm	8	2342	46.9	2345	46.9	<b><u>2344</u></b>	<b><u>46.9</u></b>	4	1120	49.1	<b><u>1121</u></b>	<b><u>49.0</u></b>	1121	49.0
481.wrf	8	1000	89.4	<b><u>994</u></b>	<b><u>89.9</u></b>	992	90.0	8	1000	89.4	<b><u>994</u></b>	<b><u>89.9</u></b>	992	90.0
482.sphinx3	8	1956	79.7	1954	79.8	<b><u>1956</u></b>	<b><u>79.7</u></b>	8	1820	85.7	<b><u>1820</u></b>	<b><u>85.7</u></b>	1820	85.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

For information about Fujitsu please visit: <http://www.fujitsu.com>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 71.3**

PRIMERGY TX150 S7, Intel Xeon L3426, 1.86 GHz

**SPECfp\_rate\_base2006 = 68.8**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Dec-2009  
**Hardware Availability:** Jan-2010  
**Software Availability:** Nov-2009

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.lelie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 71.3**

**PRIMERGY TX150 S7, Intel Xeon L3426, 1.86 GHz**

**SPECfp\_rate\_base2006 = 68.8**

**CPU2006 license:** 19

**Test date:** Dec-2009

**Test sponsor:** Fujitsu

**Hardware Availability:** Jan-2010

**Tested by:** Fujitsu

**Software Availability:** Nov-2009

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 71.3**

PRIMERGY TX150 S7, Intel Xeon L3426, 1.86 GHz

**SPECfp\_rate\_base2006 = 68.8**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Nov-2009

## Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -auto -inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp\_rate2006 = 71.3

PRIMERGY TX150 S7, Intel Xeon L3426, 1.86 GHz

SPECfp\_rate\_base2006 = 68.8

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Nov-2009

## Peak Optimization Flags (Continued)

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revF.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revF.20100202.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:50:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 February 2010.