



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint®2006 = 30.0

PRIMERGY RX100 S6, Intel Xeon X3430, 2.40 GHz

SPECint_base2006 = 27.4

CPU2006 license: 19


Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

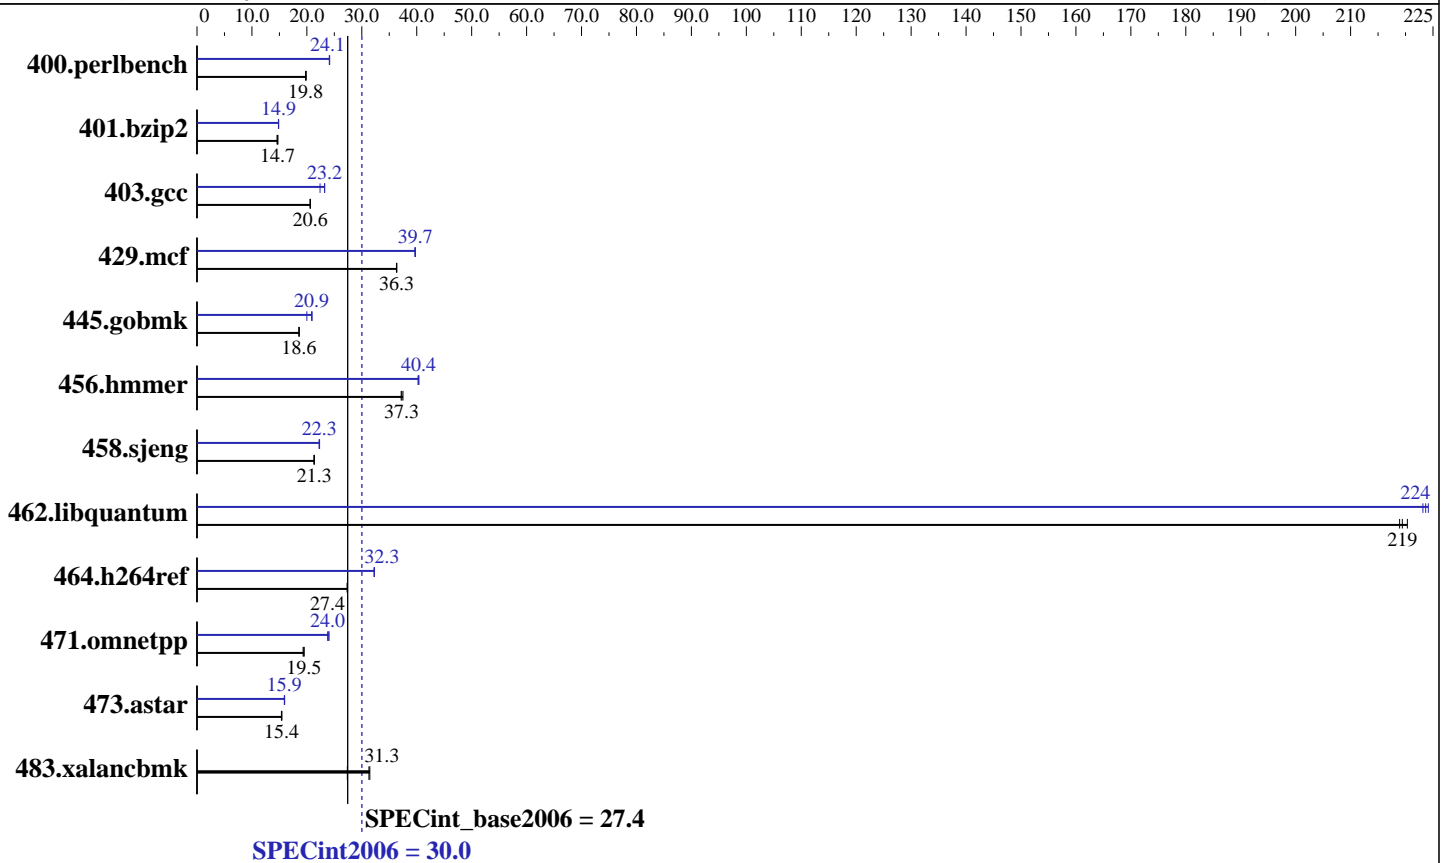

Hardware

CPU Name: Intel Xeon X3430
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4x4 GB PC3-10600R, 2 rank, CL9-9-9, ECC)
 Disk Subsystem: 1 x SATA, 250 GB, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091012 Package ID: 1_cproc_p_11.1.059
 Auto Parallel: Yes
 File System: ext3
 System State: Multi-User Run Level 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 30.0

PRIMERGY RX100 S6, Intel Xeon X3430, 2.40 GHz

SPECint_base2006 = 27.4

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: Dec-2009
Hardware Availability: Jan-2010
Software Availability: Nov-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	492	19.9	494	19.8	494	19.8	405	24.1	404	24.2	406	24.1
401.bzip2	656	14.7	656	14.7	662	14.6	650	14.9	651	14.8	649	14.9
403.gcc	390	20.6	390	20.6	391	20.6	346	23.2	359	22.4	347	23.2
429.mcf	251	36.4	251	36.3	251	36.3	230	39.7	230	39.7	229	39.8
445.gobmk	565	18.6	565	18.6	564	18.6	500	21.0	525	20.0	503	20.9
456.hammer	250	37.3	249	37.5	251	37.2	232	40.2	231	40.4	231	40.4
458.sjeng	567	21.3	566	21.4	568	21.3	544	22.2	542	22.3	544	22.3
462.libquantum	94.0	220	94.4	219	94.6	219	92.4	224	92.6	224	92.8	223
464.h264ref	808	27.4	809	27.4	809	27.4	686	32.3	686	32.3	686	32.3
471.omnetpp	320	19.5	324	19.3	321	19.5	261	24.0	260	24.0	263	23.8
473.astar	455	15.4	457	15.4	455	15.4	440	16.0	441	15.9	441	15.9
483.xalancbmk	252	27.4	219	31.5	220	31.3	252	27.4	219	31.5	220	31.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 30.0

PRIMERGY RX100 S6, Intel Xeon X3430, 2.40 GHz

SPECint_base2006 = 27.4

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

Base Portability Flags (Continued)

```

445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
471.omnetpp: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Base Optimization Flags

C benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch

```

C++ benchmarks:

```

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-64bit -lsmartheap64

```

Base Other Flags

C benchmarks:

```

403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

C benchmarks (except as noted below):

```

icc -m64

```

```

400.perlbench: icc -m32

```

```

429.mcf: icc -m32

```

```

445.gobmk: icc -m32

```

```

464.h264ref: icc -m32

```

C++ benchmarks (except as noted below):

```

icpc -m64

```

```

471.omnetpp: icpc -m32

```



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 30.0

PRIMERGY RX100 S6, Intel Xeon X3430, 2.40 GHz

SPECint_base2006 = 27.4

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Dec-2009

Hardware Availability: Jan-2010

Software Availability: Nov-2009

Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
            -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
          -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
                 -par-runtime-control -opt-prefetch
                 -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
              -prof-use(pass 2) -unroll2 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECint2006 = 30.0

PRIMERGY RX100 S6, Intel Xeon X3430, 2.40 GHz

SPECint_base2006 = 27.4

CPU2006 license: 19

Test date: Dec-2009

Test sponsor: Fujitsu

Hardware Availability: Jan-2010

Tested by: Fujitsu

Software Availability: Nov-2009

Peak Optimization Flags (Continued)

471.omnetpp (continued):
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revE.20100202.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revE.20100202.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:50:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 February 2010.