



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

## SPECfp®\_rate2006 = 1900

## IBM Power 770 (3.1 GHz, 64 core)

## SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

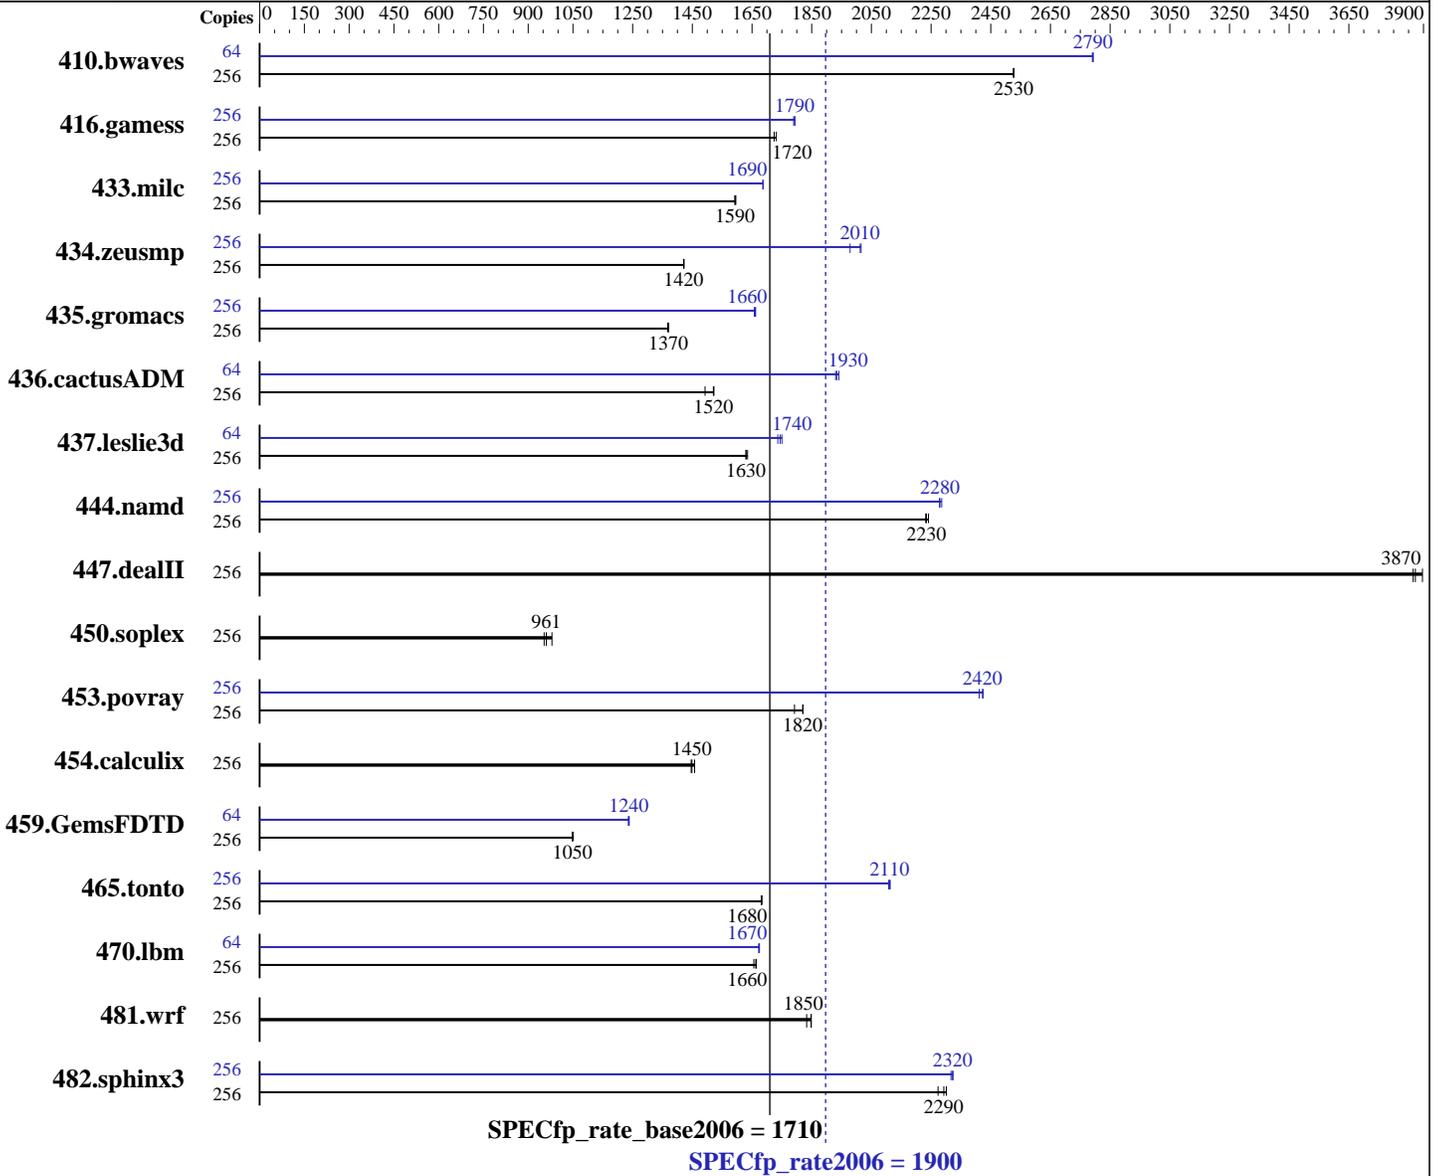

### Hardware

CPU Name: POWER7  
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.41 GHz  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 64 cores, 8 chips, 8 cores/chip, 4 threads/core  
 CPU(s) orderable: 12,16,24,32,36,48,64 cores  
 Primary Cache: 32 KB I + 32 KB D on chip per core

Continued on next page

### Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3  
 Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX  
 XL Fortran Enterprise Edition V12.1.0.6 for AIX  
 Auto Parallel: No  
 File System: AIX/JFS2  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 1900

IBM Power 770 (3.1 GHz, 64 core)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 4 MB I+D on chip per core  
Other Cache: None  
Memory: 512 GB (64x8 GB) DDR3 1066 MHz  
Disk Subsystem: 12x146.8 GB SAS SFF 15K RPM  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	256	<b>1377</b>	<b>2530</b>	1377	2530	1377	2530	64	<b>311</b>	<b>2790</b>	311	2790	312	2790
416.gamess	256	2895	1730	2907	1720	<b>2907</b>	<b>1720</b>	256	2801	1790	2794	1790	<b>2796</b>	<b>1790</b>
433.milc	256	1476	1590	<b>1475</b>	<b>1590</b>	1473	1600	256	1394	1690	1393	1690	<b>1393</b>	<b>1690</b>
434.zeusmp	256	1639	1420	<b>1639</b>	<b>1420</b>	1638	1420	256	1177	1980	1156	2020	<b>1158</b>	<b>2010</b>
435.gromacs	256	1337	1370	1334	1370	<b>1335</b>	<b>1370</b>	256	1100	1660	<b>1101</b>	<b>1660</b>	1103	1660
436.cactusADM	256	2050	1490	2009	1520	<b>2012</b>	<b>1520</b>	64	394	1940	396	1930	<b>395</b>	<b>1930</b>
437.leslie3d	256	1472	1640	1477	1630	<b>1476</b>	<b>1630</b>	64	344	1750	346	1740	<b>345</b>	<b>1740</b>
444.namd	256	916	2240	<b>919</b>	<b>2230</b>	920	2230	256	901	2280	898	2290	<b>901</b>	<b>2280</b>
447.dealII	256	758	3870	752	3900	<b>756</b>	<b>3870</b>	256	758	3870	752	3900	<b>756</b>	<b>3870</b>
450.soplex	256	2179	980	2239	953	<b>2223</b>	<b>961</b>	256	2179	980	2239	953	<b>2223</b>	<b>961</b>
453.povray	256	748	1820	<b>748</b>	<b>1820</b>	760	1790	256	565	2410	562	2420	<b>562</b>	<b>2420</b>
454.calculix	256	1449	1460	<b>1458</b>	<b>1450</b>	1461	1450	256	1449	1460	<b>1458</b>	<b>1450</b>	1461	1450
459.GemsFDTD	256	2592	1050	2584	1050	<b>2592</b>	<b>1050</b>	64	550	1240	548	1240	<b>549</b>	<b>1240</b>
465.tonto	256	1498	1680	<b>1498</b>	<b>1680</b>	1496	1680	256	1192	2110	1195	2110	<b>1193</b>	<b>2110</b>
470.lbm	256	2113	1660	<b>2116</b>	<b>1660</b>	2124	1660	64	526	1670	525	1670	<b>525</b>	<b>1670</b>
481.wrf	256	1560	1830	<b>1547</b>	<b>1850</b>	1547	1850	256	1560	1830	<b>1547</b>	<b>1850</b>	1547	1850
482.sphinx3	256	2168	2300	<b>2176</b>	<b>2290</b>	2195	2270	256	2147	2320	2154	2320	<b>2149</b>	<b>2320</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Peak Tuning Notes

fdpr binary optimization tool used for 410.bwaves  
with options -O3 -vrox -pbsi -A 64

fdpr binary optimization tool used for 433.milc  
with options -O4 -vrox -pbsi

fdpr binary optimization tool used for 434.zeusmp  
with options -O3 -vrox -sdp 9

fdpr binary optimization tool used for 435.gromacs  
with options -O4 -vrox -pbsi

fdpr binary optimization tool used for 437.leslie3d  
with options -O4 -vrox -pbsi

fdpr binary optimization tool used for 450.soplex  
with options -O3 -vrox -sdp 9

fdpr binary optimization tool used for 453.povray

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 1900

IBM Power 770 (3.1 GHz, 64 core)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

## Peak Tuning Notes (Continued)

```
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 454.calculix
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 459.GemsFDTD
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 470.lbm
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 481.wrf
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 482.sphinx3
with options -O4 -vrox -pbsi
```

## Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

## Operating System Notes

```
all ulimits set to unlimited.
25600 16M large pages defined with vmo command
```

## General Notes

Environment variables set by runspec before the start of the run:

```
MALLOPTIOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTIOPTS = "intrinthds=1"
```

See the flags file for details on settings.

## Base Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlC
```

Fortran benchmarks:

```
/usr/bin/xlf95
```

Benchmarks using both Fortran and C:

```
/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 1900

IBM Power 770 (3.1 GHz, 64 core)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2010

Hardware Availability: Mar-2010

Software Availability: Mar-2010

## Base Portability Flags

```
410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed
```

## Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

## Base Other Flags

C benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 1900

IBM Power 770 (3.1 GHz, 64 core)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

## Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

## Peak Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC\_CPU\_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed

## Peak Optimization Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D\_ILS\_MACROS  
-qalign=natural -qfdpr -blpdata

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto  
-qlargepage -q64 -D\_ILS\_MACROS -qfdpr -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage  
-D\_ILS\_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage  
-D\_ILS\_MACROS -blpdata

447.dealII: basepeak = yes

450.soplex: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 1900

IBM Power 770 (3.1 GHz, 64 core)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

## Peak Optimization Flags (Continued)

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D\_ILS\_MACROS  
-qalign=natural -qfdpr -btextpsize:64K

### Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1  
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3  
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnv1  
-qxlf90=nosignedzero -qfdpr -blpdata

437.leslie3d: -O5 -qlargepage -qenablevmx -qvecnv1 -qfdpr -blpdata

459.GemsFDTD: -O4 -qlargepage -q64 -qfdpr -blpdata

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-blpdata -btextpsize:64K

### Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D\_ILS\_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2  
-qarch=auto -qtune=auto -qenablevmx -qvecnv1  
-D\_ILS\_MACROS -qfdpr -qnostrict -blpdata -btextpsize:64K

454.calculix: basepeak = yes

481.wrf: basepeak = yes

## Peak Other Flags

### C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

### C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

### Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036

### Benchmarks using both Fortran and C:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp\_rate2006 = 1900

IBM Power 770 (3.1 GHz, 64 core)

SPECfp\_rate\_base2006 = 1710

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:03:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 March 2010.