



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5520)

**SPECint®2006 = 29.8**

**SPECint\_base2006 = 27.1**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

**Test date:** Jan-2010

**Hardware Availability:** Jan-2010

**Software Availability:** Sep-2009

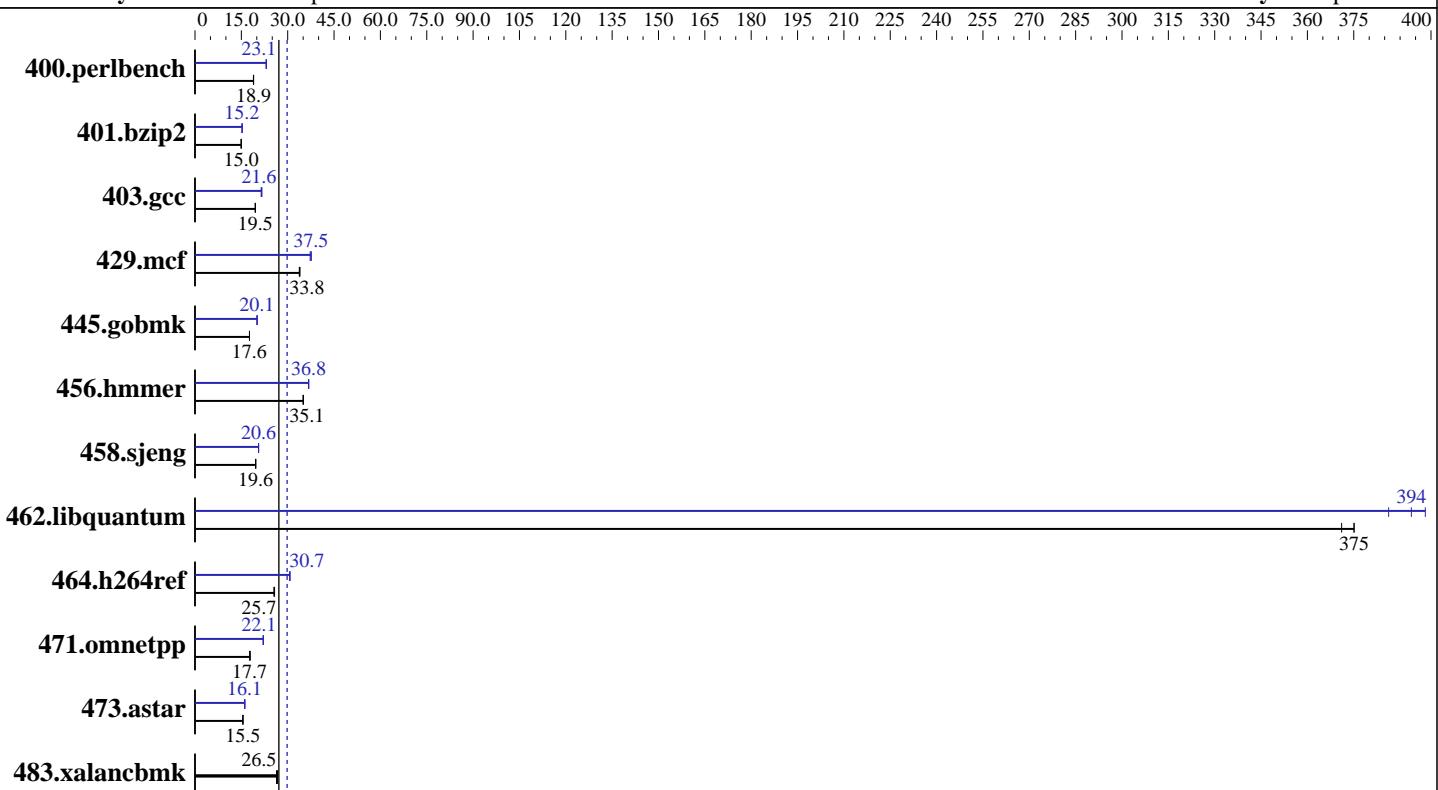

**SPECint\_base2006 = 27.1**

**SPECint2006 = 29.8**

### Hardware

CPU Name: Intel Xeon E5520  
CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz  
CPU MHz: 2267  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 8 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB PC3-8500R, 2 rank, CL7, ECC)  
Disk Subsystem: 1x146.5 GB SAS, 15000 RPM  
Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20090827 Package ID: l\_cproc\_p\_11.1.056  
Auto Parallel: Yes  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5520)

**SPECint2006 = 29.8**

**SPECint\_base2006 = 27.1**

**CPU2006 license:** 9006

**Test date:** Jan-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2010

**Tested by:** NEC Corporation

**Software Availability:** Sep-2009

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	517	18.9	515	19.0	<b>516</b>	<b>18.9</b>	423	23.1	424	23.0	<b>423</b>	<b>23.1</b>
401.bzip2	645	15.0	646	14.9	<b>645</b>	<b>15.0</b>	<b>633</b>	<b>15.2</b>	634	15.2	633	15.3
403.gcc	413	19.5	<b>412</b>	<b>19.5</b>	412	19.5	372	21.6	<b>373</b>	<b>21.6</b>	376	21.4
429.mcf	270	33.8	268	34.0	<b>270</b>	<b>33.8</b>	242	37.6	<b>243</b>	<b>37.5</b>	245	37.3
445.gobmk	595	17.6	595	17.6	<b>595</b>	<b>17.6</b>	522	20.1	523	20.1	<b>522</b>	<b>20.1</b>
456.hmmer	267	35.0	266	35.1	<b>266</b>	<b>35.1</b>	254	36.8	254	36.8	<b>254</b>	<b>36.8</b>
458.sjeng	617	19.6	615	19.7	<b>616</b>	<b>19.6</b>	588	20.6	<b>588</b>	<b>20.6</b>	588	20.6
462.libquantum	55.8	371	55.2	375	<b>55.2</b>	<b>375</b>	<b>52.6</b>	<b>394</b>	52.0	398	53.6	386
464.h264ref	866	25.6	<b>863</b>	<b>25.7</b>	860	25.7	721	30.7	721	30.7	<b>721</b>	<b>30.7</b>
471.omnetpp	<b>352</b>	<b>17.7</b>	353	17.7	350	17.9	283	22.1	<b>283</b>	<b>22.1</b>	283	22.1
473.astar	452	15.5	454	15.5	<b>453</b>	<b>15.5</b>	436	16.1	436	16.1	<b>436</b>	<b>16.1</b>
483.xalancbmk	262	26.4	259	26.7	<b>260</b>	<b>26.5</b>	262	26.4	259	26.7	<b>260</b>	<b>26.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
NUMA configuration : Enabled

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5520)

**SPECint2006 = 29.8**

**SPECint\_base2006 = 27.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jan-2010

**Hardware Availability:** Jan-2010

**Software Availability:** Sep-2009

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hammer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 471.omnetpp: -DSPEC_CPU_LP64
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Base Optimization Flags

C benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch
```

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib64 -lsmartheap64
```

## Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m64
```

```
400.perlbench: icc -m32
```

```
429.mcf: icc -m32
```

```
445.gobmk: icc -m32
```

```
464.h264ref: icc -m32
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5520)

**SPECint2006 = 29.8**

**SPECint\_base2006 = 27.1**

**CPU2006 license:** 9006

**Test date:** Jan-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Jan-2010

**Tested by:** NEC Corporation

**Software Availability:** Sep-2009

## Peak Compiler Invocation (Continued)

471.omnetpp: icpc -m32

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)
               -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
               -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
               -ipo -no-prec-div -ansi-alias

456.hammer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll14

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel
               -par-runtime-control -opt-prefetch
               -par-schedule-static=32768 -ansi-alias

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll12 -ansi-alias
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/T120a-M  
(Intel Xeon E5520)

**SPECint2006 = 29.8**

**SPECint\_base2006 = 27.1**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Jan-2010

**Hardware Availability:** Jan-2010

**Software Availability:** Sep-2009

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/opt/SmartHeap_8.1/lib -lsmartheap
```

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
              -L/opt/SmartHeap_8.1/lib64 -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revE.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revE.20100302.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:43:53 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 March 2010.