



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint[®]_rate2006 = 104

Express5800/T120a-M
(Intel Xeon E5520)

SPECint_rate_base2006 = 98.1

CPU2006 license: 9006


Test date: Feb-2010

Test sponsor: NEC Corporation

Hardware Availability: Jan-2010

Tested by: NEC Corporation

Software Availability: Dec-2009

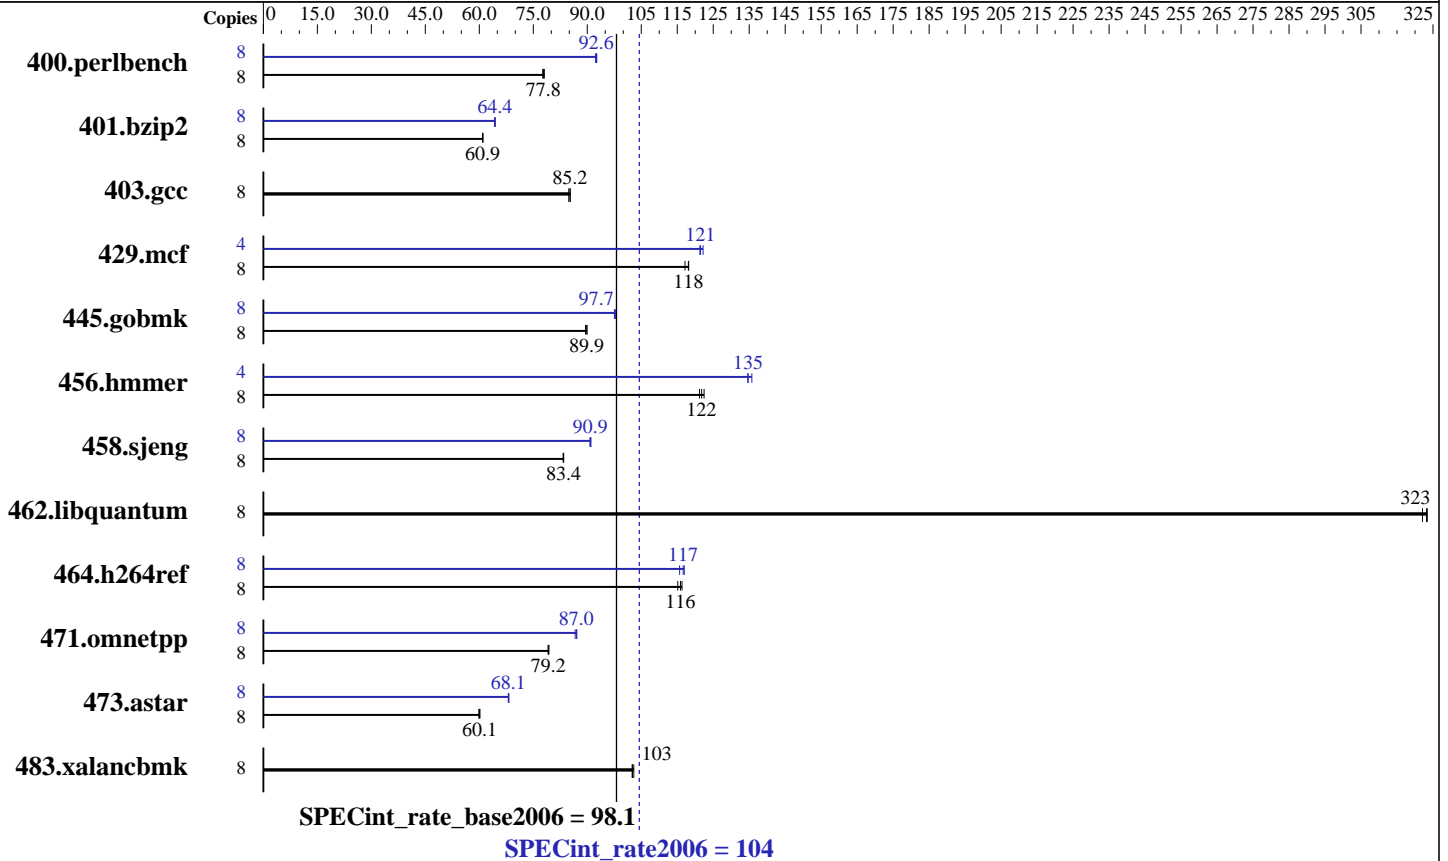

Hardware

CPU Name: Intel Xeon E5520
 CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
 CPU MHz: 2267
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB PC3-8500R, 2 rank, CL7, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 15000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-smp
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20090827 Package ID: l_cproc_p_11.1.056
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T120a-M
(Intel Xeon E5520)

SPECint_rate2006 = 104

SPECint_rate_base2006 = 98.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	1001	78.1	1007	77.6	1004	77.8	8	844	92.6	847	92.3	844	92.6
401.bzip2	8	1267	60.9	1267	60.9	1265	61.0	8	1200	64.4	1198	64.4	1202	64.3
403.gcc	8	759	84.8	756	85.2	755	85.3	8	759	84.8	756	85.2	755	85.3
429.mcf	8	618	118	617	118	623	117	4	300	121	299	122	301	121
445.gobmk	8	934	89.9	933	89.9	937	89.5	8	860	97.5	859	97.7	857	97.9
456.hammer	8	613	122	609	122	616	121	4	275	136	277	135	277	135
458.sjeng	8	1162	83.3	1161	83.4	1160	83.4	8	1063	91.0	1067	90.7	1065	90.9
462.libquantum	8	513	323	513	323	515	322	8	513	323	513	323	515	322
464.h264ref	8	1522	116	1528	116	1537	115	8	1531	116	1518	117	1514	117
471.omnetpp	8	630	79.4	632	79.2	632	79.1	8	575	87.0	574	87.1	577	86.6
473.astar	8	934	60.1	938	59.9	934	60.2	8	825	68.1	823	68.2	825	68.1
483.xalancbmk	8	539	102	538	103	536	103	8	539	102	538	103	536	103

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

Default BIOS settings were used.

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T120a-M
(Intel Xeon E5520)

SPECint_rate2006 = 104

SPECint_rate_base2006 = 98.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

Base Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 104

Express5800/T120a-M
(Intel Xeon E5520)

SPECint_rate_base2006 = 98.1

CPU2006 license: 9006

Test date: Feb-2010

Test sponsor: NEC Corporation

Hardware Availability: Jan-2010

Tested by: NEC Corporation

Software Availability: Dec-2009

Peak Portability Flags (Continued)

473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib64 -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/T120a-M
(Intel Xeon E5520)

SPECint_rate2006 = 104

SPECint_rate_base2006 = 98.1

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Feb-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revE.20100302.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revE.20100302.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:48:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.