



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint®2006 = 34.6

Intel DP55KG motherboard (Intel Core i7-870)

SPECint_base2006 = 32.5

CPU2006 license: 13


Test date: Jan-2010

Test sponsor: Intel Corporation

Hardware Availability: Jun-2009

Tested by: Intel Corporation

Software Availability: Oct-2009

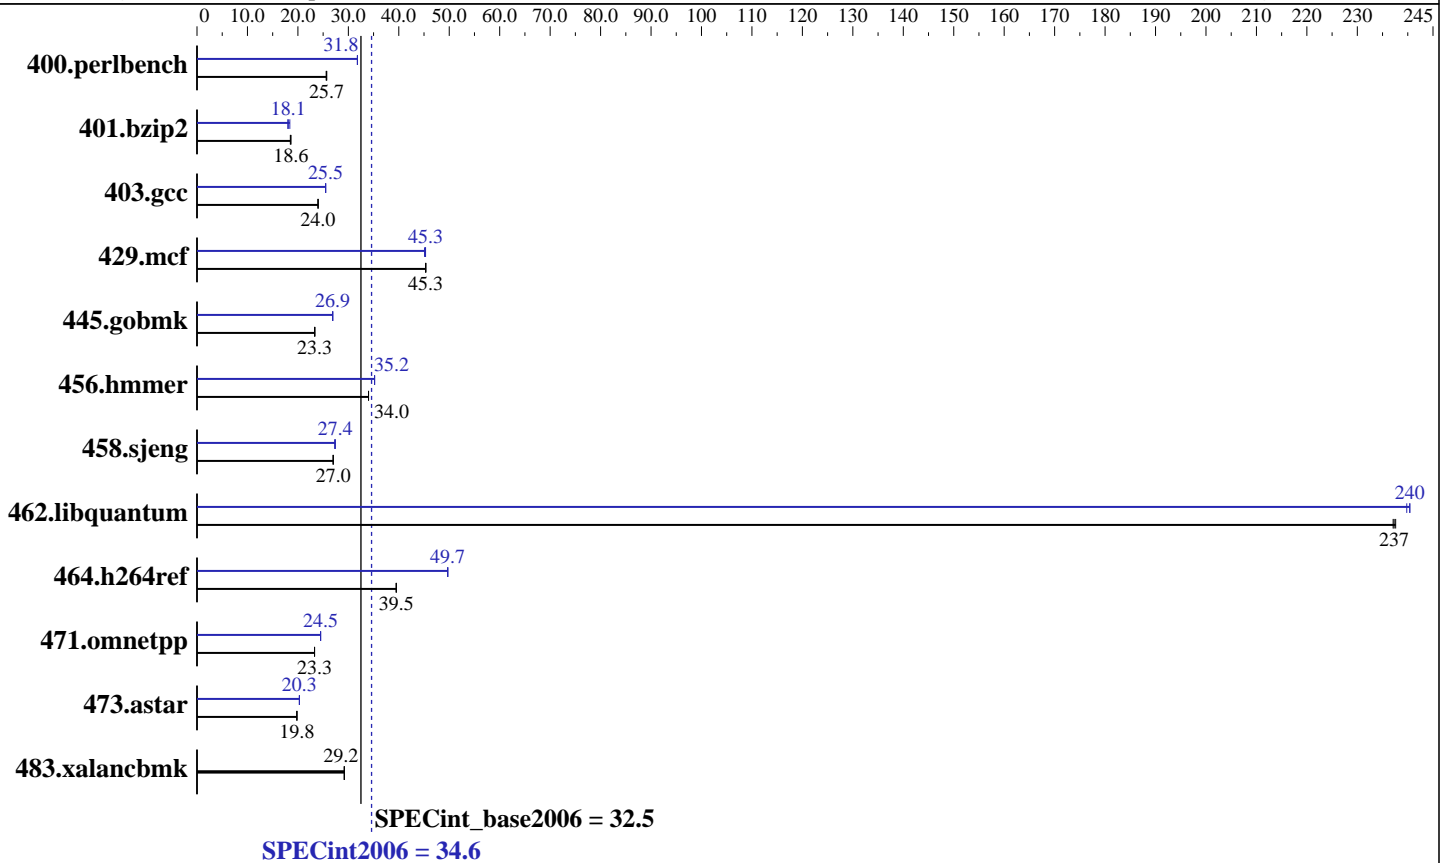

Hardware

CPU Name: Intel Core i7-870
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 4 GB (2x2GB Micron MT16JTF25664AZ-1G4 DDR3-1333 CL9)
 Disk Subsystem: Intel X25-M 80GB SSD
 Other Hardware: None

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.1 for Intel 64 Build 20090903 Package ID: w_cproc_p_11.1.045 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None
 SmartHeap Library Version 8.1 from <http://www.microquill.com/>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 34.6

Intel DP55KG motherboard (Intel Core i7-870)

SPECint_base2006 = 32.5

CPU2006 license: 13

Test date: Jan-2010

Test sponsor: Intel Corporation

Hardware Availability: Jun-2009

Tested by: Intel Corporation

Software Availability: Oct-2009

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	381	25.6	<u>381</u>	<u>25.7</u>	380	25.7	307	31.8	<u>307</u>	<u>31.8</u>	307	31.8
401.bzip2	520	18.6	520	18.5	<u>520</u>	<u>18.6</u>	523	18.4	536	18.0	<u>533</u>	<u>18.1</u>
403.gcc	<u>335</u>	<u>24.0</u>	335	24.0	335	24.0	316	25.5	<u>316</u>	<u>25.5</u>	316	25.5
429.mcf	202	45.3	201	45.4	<u>201</u>	<u>45.3</u>	201	45.3	<u>202</u>	<u>45.3</u>	202	45.1
445.gobmk	<u>449</u>	<u>23.3</u>	449	23.4	450	23.3	<u>390</u>	<u>26.9</u>	390	26.9	390	26.9
456.hmmer	275	34.0	275	34.0	<u>275</u>	<u>34.0</u>	<u>265</u>	<u>35.2</u>	265	35.2	265	35.2
458.sjeng	448	27.0	<u>448</u>	<u>27.0</u>	448	27.0	442	27.4	443	27.3	<u>442</u>	<u>27.4</u>
462.libquantum	87.4	237	<u>87.3</u>	<u>237</u>	87.2	238	86.4	240	86.2	240	<u>86.2</u>	<u>240</u>
464.h264ref	560	39.5	<u>560</u>	<u>39.5</u>	560	39.5	<u>445</u>	<u>49.7</u>	445	49.7	445	49.7
471.omnetpp	<u>268</u>	<u>23.3</u>	268	23.3	268	23.3	<u>255</u>	<u>24.5</u>	255	24.5	255	24.5
473.astar	354	19.8	<u>354</u>	<u>19.8</u>	354	19.8	<u>345</u>	<u>20.3</u>	345	20.3	345	20.3
483.xalancbmk	237	29.2	236	29.2	<u>236</u>	<u>29.2</u>	237	29.2	236	29.2	<u>236</u>	<u>29.2</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 OMP_NUM_THREADS set to number of processors cores
 KMP_AFFINITY set to granularity=fine,scatter
 System was configured with an ATI 5970 discrete graphics card

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qstd=c99

C++ benchmarks:
 icl -Qvc9

Base Portability Flags

400.perlbench: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64_X64
 -DSPEC_CPU_NO_NEED_VA_COPY
 401.bzip2: -DSPEC_CPU_P64
 403.gcc: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
 429.mcf: -DSPEC_CPU_P64
 445.gobmk: -DSPEC_CPU_P64
 456.hmmer: -DSPEC_CPU_P64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 34.6

Intel DP55KG motherboard (Intel Core i7-870)

SPECint_base2006 = 32.5

CPU2006 license: 13

Test date: Jan-2010

Test sponsor: Intel Corporation

Hardware Availability: Jun-2009

Tested by: Intel Corporation

Software Availability: Oct-2009

Base Portability Flags (Continued)

```

458.sjeng: -DSPEC_CPU_P64
462.libquantum: -DSPEC_CPU_P64
464.h264ref: -DSPEC_CPU_P64 -DWIN32 -DSPEC_CPU_NO_INTTYPES
471.omnetpp: -DSPEC_CPU_P64 -DSPEC_CPU_WIN64
473.astar: -DSPEC_CPU_P64
483.xalancbmk: -DSPEC_CPU_P64 -Qoption,cpp,--no_wchar_t_keyword

```

Base Optimization Flags

```

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel
-Qauto-ilp32 /F512000000

C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
-Qauto-ilp32 /F512000000 shlw64M.lib -link /FORCE:MULTIPLE

```

Base Other Flags

```

C benchmarks:
403.gcc: -Dalloca=_alloca

```

Peak Compiler Invocation

```

C benchmarks:
icl -Qvc9 -Qstd=c99

C++ benchmarks:
icl -Qvc9

```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 34.6

Intel DP55KG motherboard (Intel Core i7-870)

SPECint_base2006 = 32.5

CPU2006 license: 13

Test date: Jan-2010

Test sponsor: Intel Corporation

Hardware Availability: Jun-2009

Tested by: Intel Corporation

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

400.perlbench: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qopt-prefetch
-Qauto-ilp32 /F512000000 shlw64M.lib
-link /FORCE:MULTIPLE

401.bzip2: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qansi-alias
-Qauto-ilp32 /F512000000

403.gcc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qauto-ilp32 /F512000000

429.mcf: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qauto-ilp32 /F512000000

445.gobmk: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O2 -Qprec-div- -Qansi-alias -Qauto-ilp32
/F512000000

456.hmmr: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F512000000

458.sjeng: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto-ilp32 /F512000000

462.libquantum: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
-Qparallel -Qpar-schedule-static:32768 -Qansi-alias
-Qauto-ilp32 /F512000000

464.h264ref: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qauto-ilp32 /F512000000

C++ benchmarks:

471.omnetpp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=block -Qauto-ilp32 /F512000000
shlw64M.lib -link /FORCE:MULTIPLE

473.astar: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias
-Qopt-ra-region-strategy=routine -Qauto-ilp32 /F512000000
shlw64M.lib -link /FORCE:MULTIPLE

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECint2006 = 34.6

Intel DP55KG motherboard (Intel Core i7-870)

SPECint_base2006 = 32.5

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Jan-2010

Hardware Availability: Jun-2009

Software Availability: Oct-2009

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:44:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 March 2010.