



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint®\_rate2006 = 532**

NovaScale R480 F2 (Intel Xeon E7540, 2.00 GHz)

**SPECint\_rate\_base2006 = 493**

CPU2006 license: 20


Test date: Feb-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

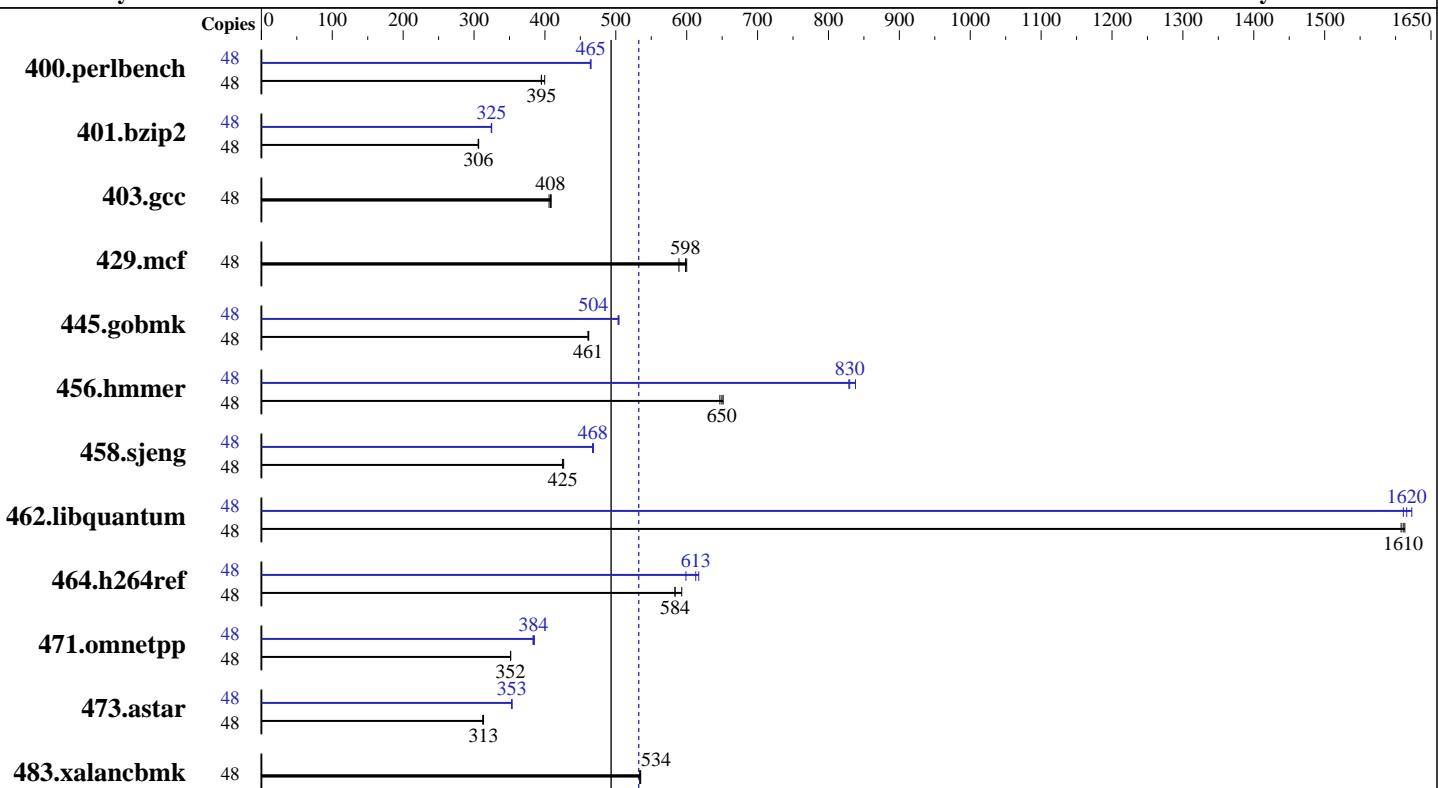

**SPECint\_rate\_base2006 = 493**

**SPECint\_rate2006 = 532**

## Hardware

CPU Name: Intel Xeon E7540  
CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 18 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (64 x 4 GB DDR3-1067 QR RDIMM)  
Disk Subsystem: 1 x 300 GB 10000 RPM SAS 6Gb  
Other Hardware: None

## Operating System:

Red Hat Linux Enterprise Linux 5 (x86\_64) Update 4 errata kernel (RHEL 5.4.z) kernel-2.6.18-164.9.1.el5.x86\_64

## Compiler:

Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064

## Auto Parallel:

No

## File System:

ext3

## System State:

Run level 5 (multi-user mode, with display manager as well as console logins)

## Base Pointers:

32-bit

## Peak Pointers:

32/64-bit

## Other Software:

Binutils 2.17.50.0.6-12.el5

## Software



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon E7540, 2.00 GHz)

**SPECint\_rate2006 = 532**

**SPECint\_rate\_base2006 = 493**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Feb-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	1173	400	1188	395	<b><u>1187</u></b>	<b><u>395</u></b>	48	<b><u>1009</u></b>	<b><u>465</u></b>	1009	465	1011	464
401.bzip2	48	1514	306	<b><u>1513</u></b>	<b><u>306</u></b>	1511	307	48	1428	324	1426	325	<b><u>1427</u></b>	<b><u>325</u></b>
403.gcc	48	945	409	<b><u>947</u></b>	<b><u>408</u></b>	952	406	48	945	409	<b><u>947</u></b>	<b><u>408</u></b>	952	406
429.mcf	48	743	589	730	600	<b><u>732</u></b>	<b><u>598</u></b>	48	743	589	730	600	<b><u>732</u></b>	<b><u>598</u></b>
445.gobmk	48	1090	462	<b><u>1092</u></b>	<b><u>461</u></b>	1092	461	48	999	504	<b><u>999</u></b>	<b><u>504</u></b>	1001	503
456.hammer	48	<b><u>689</u></b>	<b><u>650</u></b>	687	651	692	647	48	534	838	540	829	<b><u>540</u></b>	<b><u>830</u></b>
458.sjeng	48	1368	425	1362	426	<b><u>1366</u></b>	<b><u>425</u></b>	48	1239	469	1243	467	<b><u>1242</u></b>	<b><u>468</u></b>
462.libquantum	48	617	1610	619	1610	<b><u>617</u></b>	<b><u>1610</u></b>	48	617	1610	<b><u>616</u></b>	<b><u>1620</u></b>	613	1620
464.h264ref	48	<b><u>1820</u></b>	<b><u>584</u></b>	1791	593	1820	584	48	1722	617	1774	599	<b><u>1734</u></b>	<b><u>613</u></b>
471.omnetpp	48	853	352	<b><u>853</u></b>	<b><u>352</u></b>	854	351	48	779	385	<b><u>781</u></b>	<b><u>384</u></b>	783	383
473.astar	48	<b><u>1076</u></b>	<b><u>313</u></b>	1075	313	1079	312	48	955	353	953	354	<b><u>953</u></b>	<b><u>353</u></b>
483.xalancbmk	48	<b><u>620</u></b>	<b><u>534</u></b>	619	535	621	534	48	<b><u>620</u></b>	<b><u>534</u></b>	619	535	621	534

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

vm.zone\_reclaim\_mode = 1 in /etc/sysctl.conf file  
BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R910 and the Bull NovaScale R480 F2 models are electronically equivalent.  
The results have been measured on a Dell PowerEdge R910 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon E7540, 2.00 GHz)

**SPECint\_rate2006 = 532**

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Feb-2010  
Hardware Availability: Mar-2010  
Software Availability: Dec-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
`icpc -m32`

## Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Base Optimization Flags

C benchmarks:  
`-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch`

C++ benchmarks:  
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap`

## Base Other Flags

C benchmarks:

`403.gcc: -Dalloca=_alloca`

## Peak Compiler Invocation

C benchmarks (except as noted below):  
`icc -m32`

`401.bzip2: icc -m64`  
`456.hmmr: icc -m64`  
`458.sjeng: icc -m64`  
`462.libquantum: icc -m64`

C++ benchmarks (except as noted below):  
`icpc -m32`

`473.astar: icpc -m64`



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 F2 (Intel Xeon E7540, 2.00 GHz)

**SPECint\_rate2006 = 532**

**SPECint\_rate\_base2006 = 493**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Feb-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Dec-2009

## Peak Portability Flags

```

400.perlbench: -DSPEC_CPU_LINUX_IA32
 401.bzip2: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 473.astar: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

```

## Peak Optimization Flags

C benchmarks:

```

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
               -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll12
               -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll14 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
                  -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -unroll12 -ansi-alias

```

C++ benchmarks:

```

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
               -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
               -L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmartheap

```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

**SPECint\_rate2006 = 532**

NovaScale R480 F2 (Intel Xeon E7540, 2.00 GHz)

**SPECint\_rate\_base2006 = 493**

CPU2006 license: 20

Test date: Feb-2010

Test sponsor: Bull SAS

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
           -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
           -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
           -L/home/cmpllr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

```
483.xalancbmk: basepeak = yes
```

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:14:16 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 March 2010.