



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

## SPECint®\_rate2006 = 341

### NovaScale R460 F2 (Intel Xeon X5650, 2.66 GHz)

## SPECint\_rate\_base2006 = 318

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Dec-2009

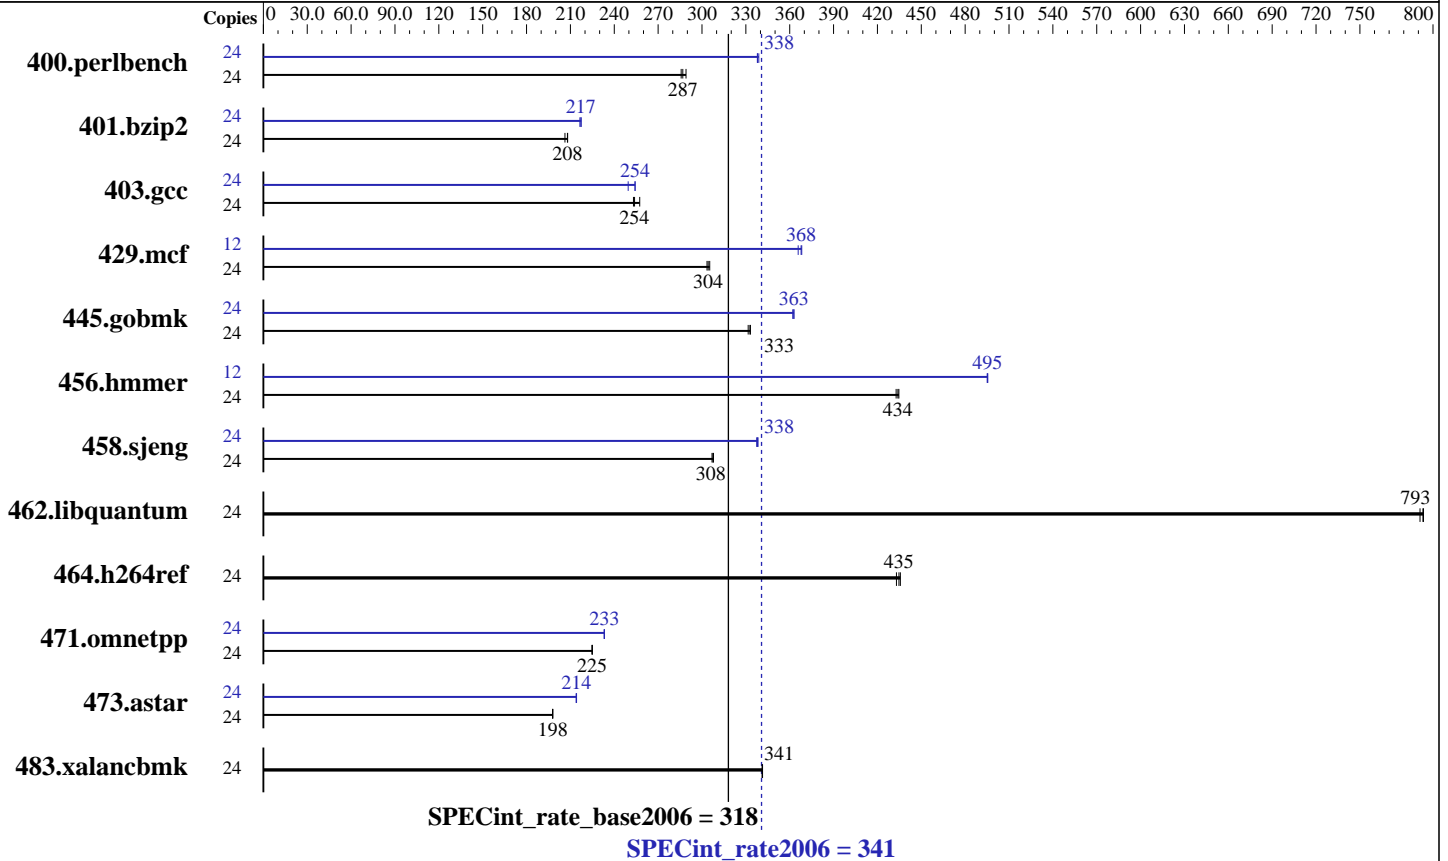

### Hardware

CPU Name: Intel Xeon X5650  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.06 GHz  
 CPU MHz: 2667  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB DDR3-1333 DR RDIMM)  
 Disk Subsystem: 1 x 146 GB 15000 RPM SAS  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-smp  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 341

NovaScale R460 F2 (Intel Xeon X5650, 2.66 GHz)

SPECint\_rate\_base2006 = 318

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Mar-2010  
Hardware Availability: Mar-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>817</b>	<b>287</b>	821	286	811	289	24	694	338	<b>694</b>	<b>338</b>	692	339
401.bzip2	24	1123	206	<b>1114</b>	<b>208</b>	1113	208	24	1070	216	<b>1066</b>	<b>217</b>	1065	217
403.gcc	24	751	257	763	253	<b>761</b>	<b>254</b>	24	774	250	<b>760</b>	<b>254</b>	760	254
429.mcf	24	721	303	717	305	<b>719</b>	<b>304</b>	12	299	366	297	368	<b>298</b>	<b>368</b>
445.gobmk	24	756	333	<b>757</b>	<b>333</b>	759	332	24	<b>694</b>	<b>363</b>	694	363	695	362
456.hammer	24	517	433	515	435	<b>516</b>	<b>434</b>	12	226	495	226	495	<b>226</b>	<b>495</b>
458.sjeng	24	<b>944</b>	<b>308</b>	946	307	943	308	24	<b>859</b>	<b>338</b>	858	338	861	337
462.libquantum	24	629	791	627	793	<b>627</b>	<b>793</b>	24	629	791	627	793	<b>627</b>	<b>793</b>
464.h264ref	24	1219	436	<b>1222</b>	<b>435</b>	1227	433	24	1219	436	<b>1222</b>	<b>435</b>	1227	433
471.omnetpp	24	<b>667</b>	<b>225</b>	667	225	667	225	24	643	233	644	233	<b>643</b>	<b>233</b>
473.astar	24	852	198	851	198	<b>851</b>	<b>198</b>	24	788	214	<b>787</b>	<b>214</b>	787	214
483.xalancbmk	24	485	341	485	341	<b>485</b>	<b>341</b>	24	485	341	485	341	<b>485</b>	<b>341</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)  
Data Reuse = Disabled (Default = Enabled)

## General Notes

The Dell PowerEdge R710 (Intel Xeon X5650, 2.66 GHz) and the Bull NovaScale R460 F2 (Intel Xeon X5650, 2.66 GHz) models are electronically equivalent. The results have been measured on a Dell PowerEdge R710 (Intel Xeon X5650, 2.66 GHz) model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 341**

NovaScale R460 F2 (Intel Xeon X5650, 2.66 GHz)

**SPECint\_rate\_base2006 = 318**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Mar-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Dec-2009

## Base Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 341

NovaScale R460 F2 (Intel Xeon X5650, 2.66 GHz)

SPECint\_rate\_base2006 = 318

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Mar-2010  
Hardware Availability: Mar-2010  
Software Availability: Dec-2009

## Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
               -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
               -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
            -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
            -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
            -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: basepeak = yes
```

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
              -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
              -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
              -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmarheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
            -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmarheap64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 341**

NovaScale R460 F2 (Intel Xeon X5650, 2.66 GHz)

**SPECint\_rate\_base2006 = 318**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Mar-2010

**Hardware Availability:** Mar-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 05:28:57 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 30 March 2010.