



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp®2006 = 40.2

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp_base2006 = 38.4

CPU2006 license: 13


Test date: Mar-2010

Test sponsor: Intel Corporation

Hardware Availability: Mar-2010

Tested by: Intel Corporation

Software Availability: Oct-2009

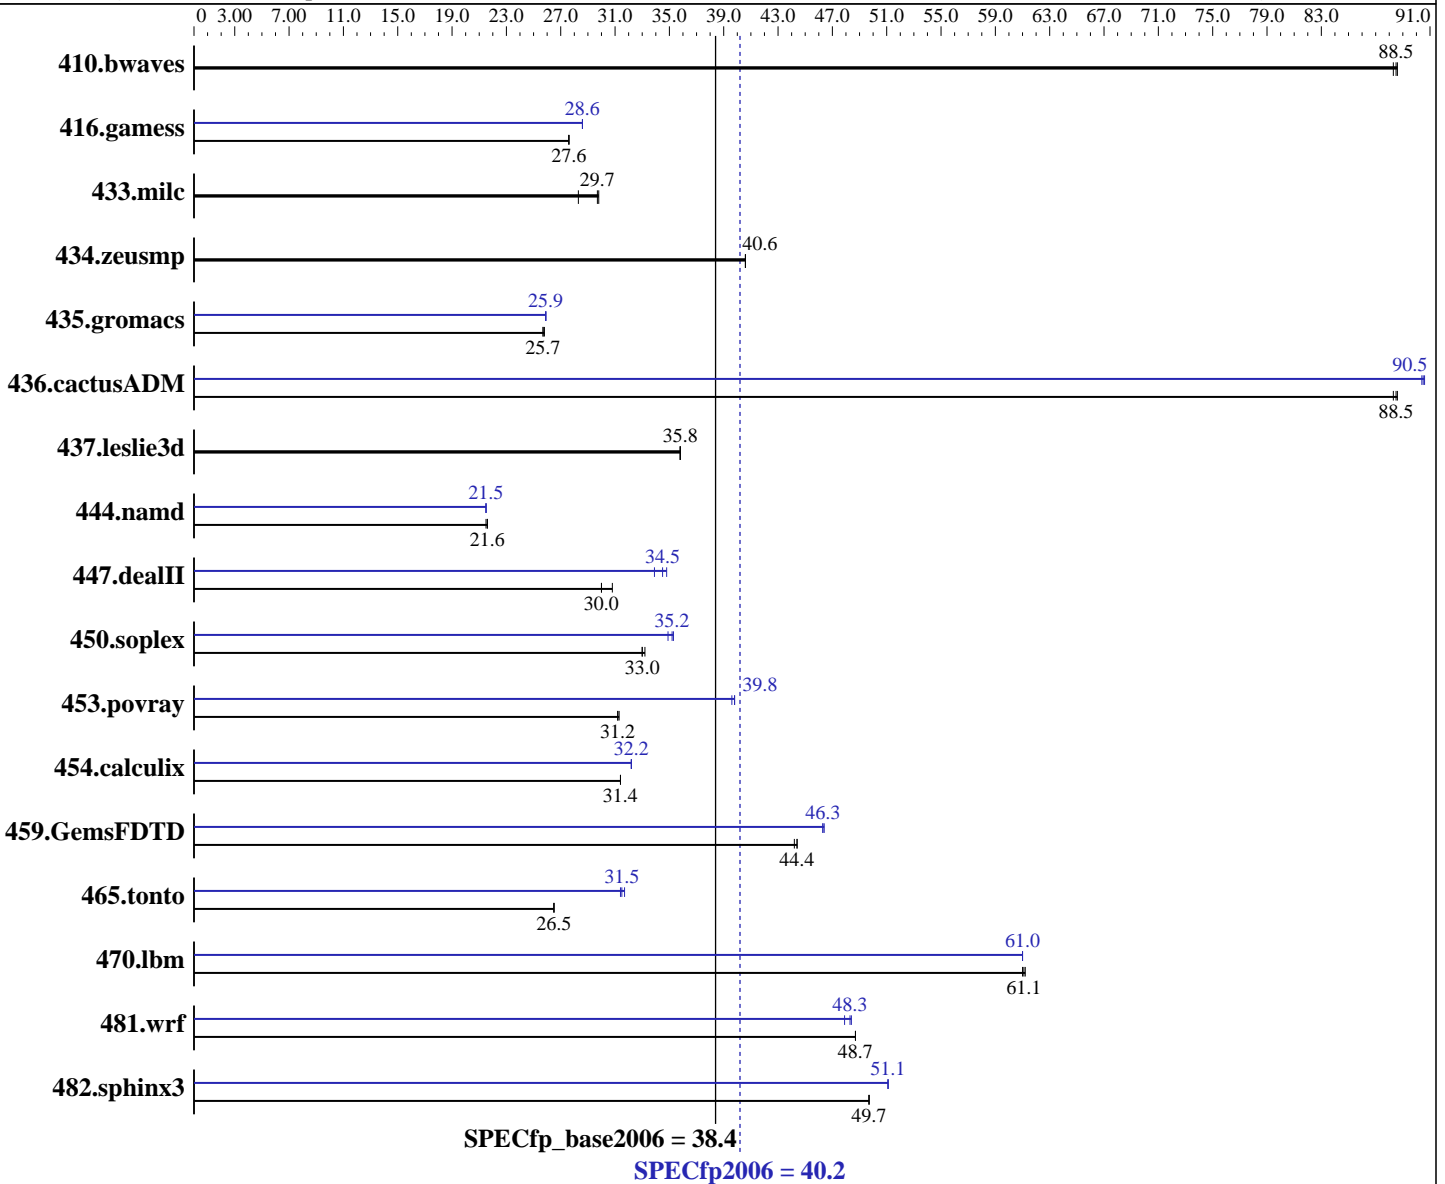

Hardware

CPU Name: Intel Core i7-980X
 CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz
 CPU MHz: 3333
 FPU: Integrated
 CPU(s) enabled: 6 cores, 1 chip, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows 7 Ultimate (64-bit)
 Compiler: Intel C++ Compiler Professional 11.1 for Intel 64
 Build 20090903 Package ID: w_cproc_p_11.1.045
 Intel Visual Fortran Compiler Professional 11.1 for Intel 64
 Build 20090903 Package ID: w_cproc_p_11.1.045, w_cprof_p_11.1.045
 Microsoft Visual Studio 2008 Professional SP1 (for libraries)
 Auto Parallel: Yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = **40.2**

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp_base2006 = **38.4**

CPU2006 license: 13

Test date: Mar-2010

Test sponsor: Intel Corporation

Hardware Availability: Mar-2010

Tested by: Intel Corporation

Software Availability: Oct-2009

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 12 GB (3x4GB Samsung M378B5273BH1-CF8 DDR3-1066 CL7)
 Disk Subsystem: Intel X25-M 160GB SSD
 Other Hardware: None

File System: NTFS
 System State: Default
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: None
 SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	154	88.3	153	88.6	154	88.5	154	88.3	153	88.6	154	88.5
416.gamess	708	27.6	708	27.6	710	27.6	686	28.6	685	28.6	686	28.6
433.milc	309	29.7	324	28.3	308	29.8	309	29.7	324	28.3	308	29.8
434.zeusmp	224	40.6	224	40.6	224	40.6	224	40.6	224	40.6	224	40.6
435.gromacs	278	25.7	278	25.7	277	25.8	276	25.9	275	25.9	276	25.9
436.cactusADM	135	88.3	135	88.6	135	88.5	132	90.4	132	90.6	132	90.5
437.leslie3d	263	35.8	262	35.8	263	35.8	263	35.8	262	35.8	263	35.8
444.namd	372	21.6	372	21.6	372	21.5	373	21.5	373	21.5	373	21.5
447.dealII	382	30.0	371	30.8	381	30.0	329	34.8	332	34.5	337	33.9
450.soplex	253	33.0	253	33.0	251	33.2	239	34.9	237	35.2	236	35.3
453.povray	170	31.3	171	31.2	170	31.2	134	39.8	134	39.6	134	39.8
454.calculix	263	31.4	263	31.4	263	31.4	256	32.2	256	32.2	257	32.2
459.GemsFDTD	239	44.4	240	44.2	239	44.4	229	46.4	229	46.3	229	46.3
465.tonto	371	26.5	371	26.5	371	26.5	312	31.5	313	31.4	311	31.7
470.lbm	225	61.0	225	61.2	225	61.1	225	61.0	225	61.0	225	61.0
481.wrf	229	48.7	229	48.7	230	48.7	232	48.3	233	47.9	231	48.4
482.sphinx3	393	49.7	392	49.7	393	49.7	381	51.1	382	51.1	381	51.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Tested systems can be used with Shin-G ATX case,
 PC Power and Cooling 1200W power supply
 OMP_NUM_THREADS set to number of processors cores
 KMP_AFFINITY set to granularity=fine,scatter

Base Compiler Invocation

C benchmarks:
 icl -Qvc9 -Qstd=c99

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 40.2

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp_base2006 = 38.4

CPU2006 license: 13

Test date: Mar-2010

Test sponsor: Intel Corporation

Hardware Availability: Mar-2010

Tested by: Intel Corporation

Software Availability: Oct-2009

Base Compiler Invocation (Continued)

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_P64 /Qlowercase
 416.gamess: -DSPEC_CPU_P64
 433.milc: -DSPEC_CPU_P64
 434.zeusmp: -DSPEC_CPU_P64
 435.gromacs: -DSPEC_CPU_P64
 436.cactusADM: -DSPEC_CPU_P64 -Qlowercase /assume:underscore
 437.lelie3d: -DSPEC_CPU_P64
 444.namd: -DSPEC_CPU_P64 /TP
 447.dealII: -DSPEC_CPU_P64 -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
 450.soplex: -DSPEC_CPU_P64
 453.povray: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 454.calculix: -DSPEC_CPU_P64 -DSPEC_CPU_NOZMODIFIER -Qlowercase
 459.GemsFDTD: -DSPEC_CPU_P64
 465.tonto: -DSPEC_CPU_P64
 470.lbm: -DSPEC_CPU_P64
 481.wrf: -DSPEC_CPU_P64 -DSPEC_CPU_WINDOWS_ICL
 482.sphinx3: -DSPEC_CPU_P64

Base Optimization Flags

C benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000

C++ benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qcxx-features -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

Fortran benchmarks:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
/F1000000000

Benchmarks using both Fortran and C:

-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qparallel -Qopt-prefetch
-Qauto-ilp32 /F1000000000



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 40.2

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp_base2006 = 38.4

CPU2006 license: 13

Test date: Mar-2010

Test sponsor: Intel Corporation

Hardware Availability: Mar-2010

Tested by: Intel Corporation

Software Availability: Oct-2009

Peak Compiler Invocation

C benchmarks:

icl -Qvc9 -Qstd=c99

C++ benchmarks:

icl -Qvc9

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc9 -Qstd=c99 ifort

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qansi-alias -Qparallel
-Qauto-ilp32 /F1000000000

482.sphinx3: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qauto-ilp32 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

447.dealIII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch
-Qansi-alias -Qscalar-rep- -Qauto-ilp32 /F1000000000
shlW64M.lib -link /FORCE:MULTIPLE

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qauto-ilp32 /F1000000000 shlW64M.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias -Qauto-ilp32
/F1000000000 shlW64M.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 40.2

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp_base2006 = 38.4

CPU2006 license: 13

Test date: Mar-2010

Test sponsor: Intel Corporation

Hardware Availability: Mar-2010

Tested by: Intel Corporation

Software Availability: Oct-2009

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qopt-prefetch -Qparallel
/F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto -Qinline-alloc
/F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qauto-ilp32
/F1000000000

436.cactusADM: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch -Qparallel -Qunroll2
-Qauto-ilp32 /F1000000000

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qauto-ilp32 /F1000000000

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-winx64-revA.20100302.01.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp2006 = 40.2

Intel DX58SO motherboard (Intel Core i7-980X)

SPECfp_base2006 = 38.4

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Mar-2010

Hardware Availability: Mar-2010

Software Availability: Oct-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 05:30:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 March 2010.