



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G6
(2.93 GHz, Intel Xeon X5670)

SPECfp®_rate2006 = 242

SPECfp_rate_base2006 = 235

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2010

Hardware Availability: Jun-2010

Software Availability: Sep-2009

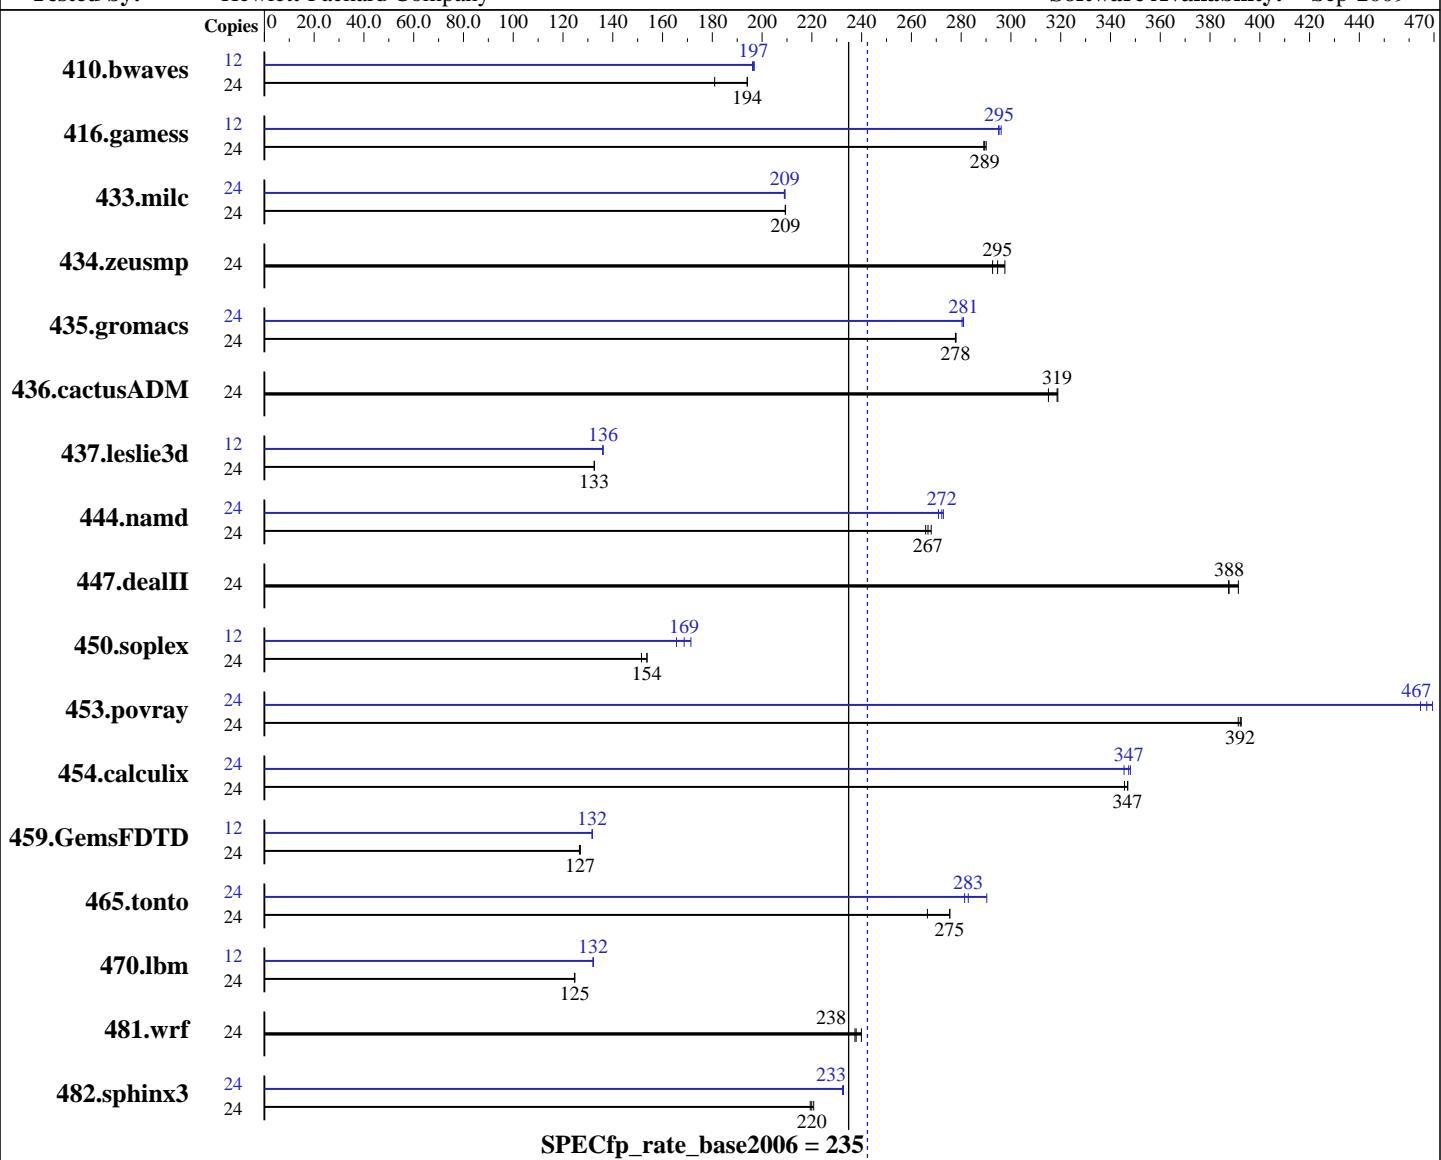

Hardware

CPU Name: Intel Xeon X5670
CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz: 2933
FPU: Integrated
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 5.4 Kernel 2.6.18-164.el5
Compiler: Intel C++ and Fortran Compiler 11.1 for Linux Build 20090827 Package ID: l_cproc_p_11.1.056, l_cprof_p_11.1.056
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G6
(2.93 GHz, Intel Xeon X5670)

SPECfp_rate2006 = 242

SPECfp_rate_base2006 = 235

CPU2006 license: 3

Test date: Mar-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Sep-2009

L3 Cache: 12 MB I+D on chip per chip
Other Cache: None
Memory: 48 GB (12x4 GB PC3-10600R CL9)
Disk Subsystem: 1 x 146 GB 10 K SAS
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.17.50.0.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1803	181	1681	194	1681	194	12	831	196	828	197	830	197
416.gamess	24	1624	289	1620	290	1626	289	12	796	295	796	295	794	296
433.milc	24	1052	209	1052	209	1052	209	24	1053	209	1054	209	1054	209
434.zeusmp	24	734	298	741	295	746	293	24	734	298	741	295	746	293
435.gromacs	24	617	278	617	278	617	278	24	611	280	610	281	610	281
436.cactusADM	24	900	319	910	315	900	319	24	900	319	910	315	900	319
437.leslie3d	24	1701	133	1702	133	1702	133	12	829	136	829	136	829	136
444.namd	24	722	267	724	266	718	268	24	711	271	707	272	705	273
447.dealII	24	702	391	708	388	709	387	24	702	391	708	388	709	387
450.soplex	24	1321	152	1302	154	1302	154	12	604	166	593	169	584	171
453.povray	24	325	393	326	392	326	391	24	272	469	273	467	275	465
454.calculix	24	571	347	571	347	573	346	24	569	348	573	345	570	347
459.GemsFDTD	24	2007	127	2011	127	2007	127	12	966	132	966	132	966	132
465.tonto	24	858	275	857	275	886	266	24	835	283	839	281	814	290
470.lbm	24	2644	125	2644	125	2647	125	12	1249	132	1248	132	1247	132
481.wrf	24	1117	240	1130	237	1127	238	24	1117	240	1130	237	1127	238
482.sphinx3	24	2132	219	2127	220	2119	221	24	2011	233	2014	232	2010	233

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
Thermal Configuration set to Increased Cooling
Memory Speed with 2 DIMMs per Channel set to 1333MHz Maximum

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G6
(2.93 GHz, Intel Xeon X5670)

SPECfp_rate2006 = 242

SPECfp_rate_base2006 = 235

CPU2006 license: 3

Test date: Mar-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Sep-2009

Platform Notes (Continued)

Data Reuse set to Disabled

Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G6
(2.93 GHz, Intel Xeon X5670)

SPECfp_rate2006 = 242

SPECfp_rate_base2006 = 235

CPU2006 license: 3

Test date: Mar-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: Jun-2010

Tested by: Hewlett-Packard Company

Software Availability: Sep-2009

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.1/056/bin/intel64/icpc -m32

Fortran benchmarks (except as noted below):

ifort

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G6
(2.93 GHz, Intel Xeon X5670)

SPECfp_rate2006 = 242

SPECfp_rate_base2006 = 235

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2010

Hardware Availability: Jun-2010

Software Availability: Sep-2009

Peak Optimization Flags (Continued)

433.milc: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-ilp32

482.sphinx3: -xsse4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -auto

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL360 G6
(2.93 GHz, Intel Xeon X5670)

SPECfp_rate2006 = 242

SPECfp_rate_base2006 = 235

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Mar-2010

Hardware Availability: Jun-2010

Software Availability: Sep-2009

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100202.00.html>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100511.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100202.00.xml>
<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20100511.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:53:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 11 May 2010.