



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp[®]_rate2006 = 165

SPECfp_rate_base2006 = 160

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

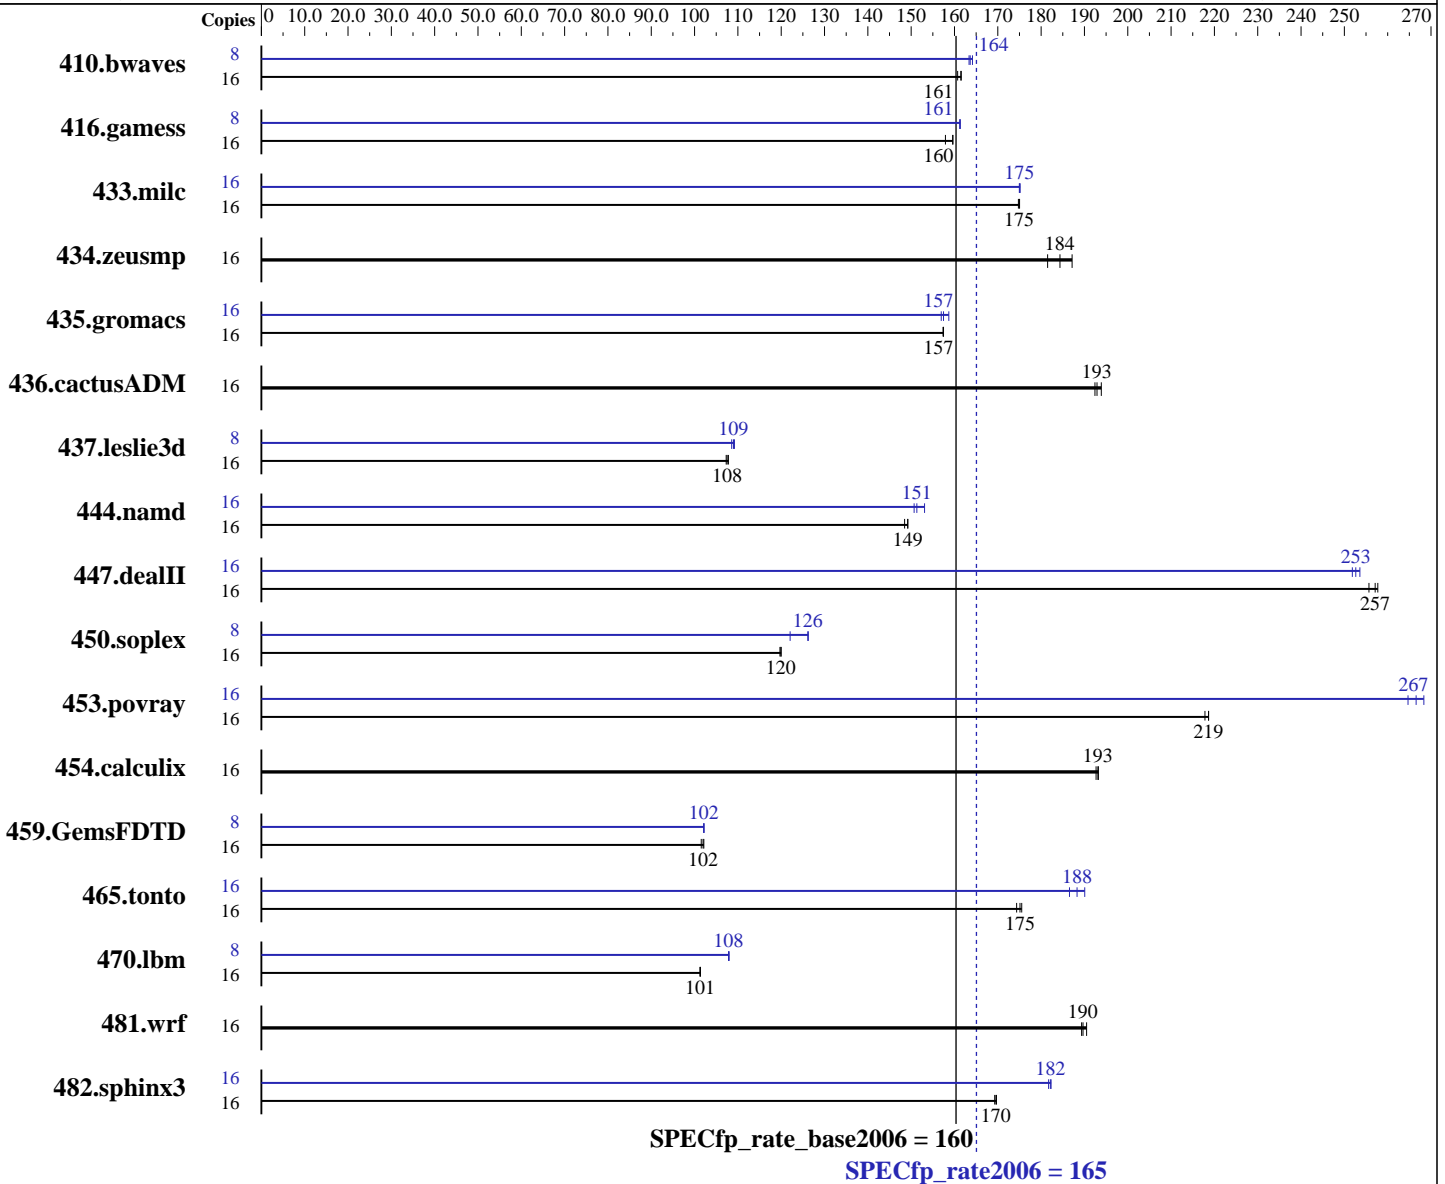

Hardware

CPU Name: Intel Xeon E5530
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 160

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1353	161	<u>1347</u>	<u>161</u>	1346	162	8	<u>664</u>	<u>164</u>	662	164	666	163		
416.gamess	16	1962	160	<u>1963</u>	<u>160</u>	1984	158	8	971	161	<u>971</u>	<u>161</u>	971	161		
433.milc	16	839	175	<u>840</u>	<u>175</u>	841	175	16	<u>839</u>	<u>175</u>	839	175	839	175		
434.zeusmp	16	802	181	778	187	<u>790</u>	<u>184</u>	16	802	181	778	187	<u>790</u>	<u>184</u>		
435.gromacs	16	725	157	<u>726</u>	<u>157</u>	726	157	16	720	159	<u>725</u>	<u>157</u>	728	157		
436.cactusADM	16	994	192	<u>991</u>	<u>193</u>	986	194	16	994	192	<u>991</u>	<u>193</u>	986	194		
437.leslie3d	16	1402	107	<u>1399</u>	<u>108</u>	1395	108	8	<u>690</u>	<u>109</u>	689	109	693	109		
444.namd	16	864	148	860	149	<u>860</u>	<u>149</u>	16	838	153	852	151	<u>848</u>	<u>151</u>		
447.dealII	16	716	256	710	258	<u>712</u>	<u>257</u>	16	727	252	<u>725</u>	<u>253</u>	722	254		
450.soplex	16	1112	120	1115	120	<u>1113</u>	<u>120</u>	8	547	122	<u>529</u>	<u>126</u>	528	126		
453.povray	16	<u>389</u>	<u>219</u>	391	218	389	219	16	<u>319</u>	<u>267</u>	322	265	317	268		
454.calculix	16	683	193	<u>684</u>	<u>193</u>	685	193	16	683	193	<u>684</u>	<u>193</u>	685	193		
459.GemsFDTD	16	1662	102	<u>1665</u>	<u>102</u>	1672	102	8	<u>831</u>	<u>102</u>	831	102	831	102		
465.tonto	16	<u>899</u>	<u>175</u>	903	174	897	176	16	844	187	828	190	<u>836</u>	<u>188</u>		
470.lbm	16	2169	101	<u>2170</u>	<u>101</u>	2171	101	8	1018	108	<u>1019</u>	<u>108</u>	1019	108		
481.wrf	16	<u>942</u>	<u>190</u>	944	189	938	190	16	<u>942</u>	<u>190</u>	944	189	938	190		
482.sphinx3	16	1842	169	<u>1839</u>	<u>170</u>	1838	170	16	<u>1712</u>	<u>182</u>	1711	182	1716	182		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

General Notes

The Dell PowerEdge R710 and the Bull NovaScale R460 F2 models are electronically equivalent. The results have been measured on a Bull NovaScale R460 F2 model.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 160

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 160

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 160

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Bull SAS

Test date: Mar-2010
Hardware Availability: Mar-2009
Software Availability: Dec-2009

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R710
(Intel Xeon E5530, 2.40 GHz)

SPECfp_rate2006 = 165

SPECfp_rate_base2006 = 160

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Mar-2009

Software Availability: Dec-2009

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 09:59:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 14 April 2010.