



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint®\_rate2006 = 218

SPECint\_rate\_base2006 = 205

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

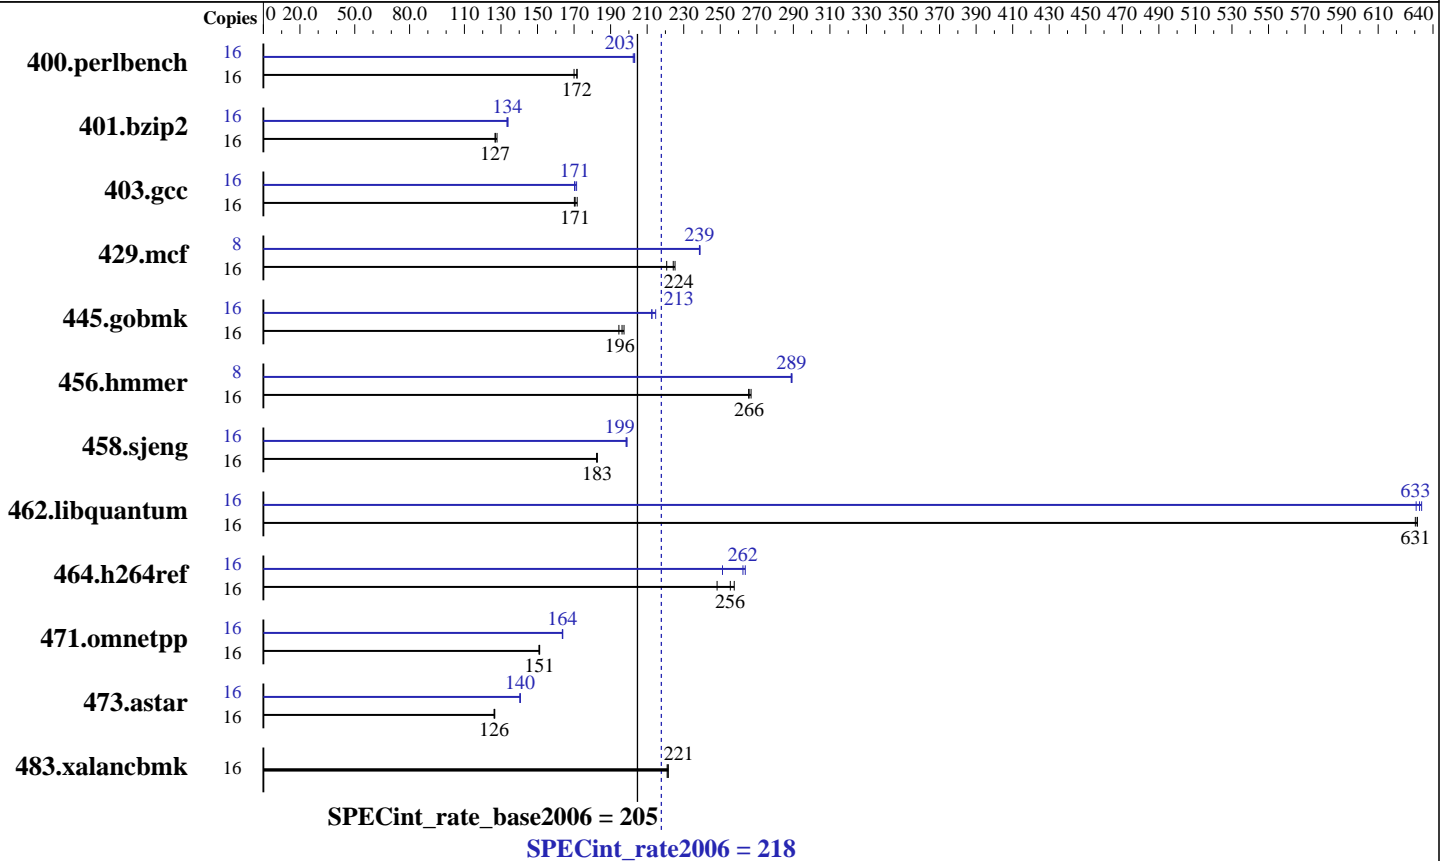

### Hardware

CPU Name: Intel Xeon E5530  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.66 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB PC3-10600R, 2 Rank, CL9-9-9, ECC, running at 1066 MHz)  
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP2, SP2 with patch Linux kernel 20090119, Kernel 2.6.16.60-0.34-smp  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint\_rate2006 = 218

SPECint\_rate\_base2006 = 205

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	911	172	<u>911</u>	<u>172</u>	920	170	16	772	202	<u>770</u>	<u>203</u>	769	203
401.bzip2	16	<u>1217</u>	<u>127</u>	1217	127	1208	128	16	1158	133	<u>1156</u>	<u>134</u>	1153	134
403.gcc	16	750	172	<u>755</u>	<u>171</u>	757	170	16	757	170	752	171	<u>755</u>	<u>171</u>
429.mcf	16	661	221	648	225	<u>651</u>	<u>224</u>	8	<u>306</u>	<u>239</u>	306	239	305	239
445.gobmk	16	<u>855</u>	<u>196</u>	851	197	863	195	16	782	215	790	212	<u>789</u>	<u>213</u>
456.hammer	16	562	266	559	267	<u>562</u>	<u>266</u>	8	258	289	<u>258</u>	<u>289</u>	258	289
458.sjeng	16	1060	183	1062	182	<u>1060</u>	<u>183</u>	16	973	199	975	199	<u>975</u>	<u>199</u>
462.libquantum	16	525	631	<u>525</u>	<u>631</u>	526	630	16	526	631	523	634	<u>524</u>	<u>633</u>
464.h264ref	16	1374	258	1426	248	<u>1386</u>	<u>256</u>	16	1343	264	<u>1349</u>	<u>262</u>	1409	251
471.omnetpp	16	<u>662</u>	<u>151</u>	663	151	661	151	16	611	164	610	164	<u>611</u>	<u>164</u>
473.astar	16	<u>889</u>	<u>126</u>	887	127	889	126	16	799	141	<u>800</u>	<u>140</u>	800	140
483.xalancbmk	16	<u>499</u>	<u>221</u>	498	222	500	221	16	<u>499</u>	<u>221</u>	498	222	500	221

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

The Dell PowerEdge R710 and the Bull NovaScale R460 F2 models are electronically equivalent. The results have been measured on a Bull NovaScale R460 F2 model.

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint\_rate2006 = 218

SPECint\_rate\_base2006 = 205

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):  
icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint\_rate2006 = 218

SPECint\_rate\_base2006 = 205

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Portability Flags (Continued)

456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static  
429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap  
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale R460 F2  
(Intel Xeon E5530, 2.40 GHz)

SPECint\_rate2006 = 218

SPECint\_rate\_base2006 = 205

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Mar-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

473.astar (continued):  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64  
483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at  
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:  
<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 09:38:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 April 2010.