



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp[®]_rate2006 = 240

Huawei BH620, Intel Xeon X5670

SPECfp_rate_base2006 = 232

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

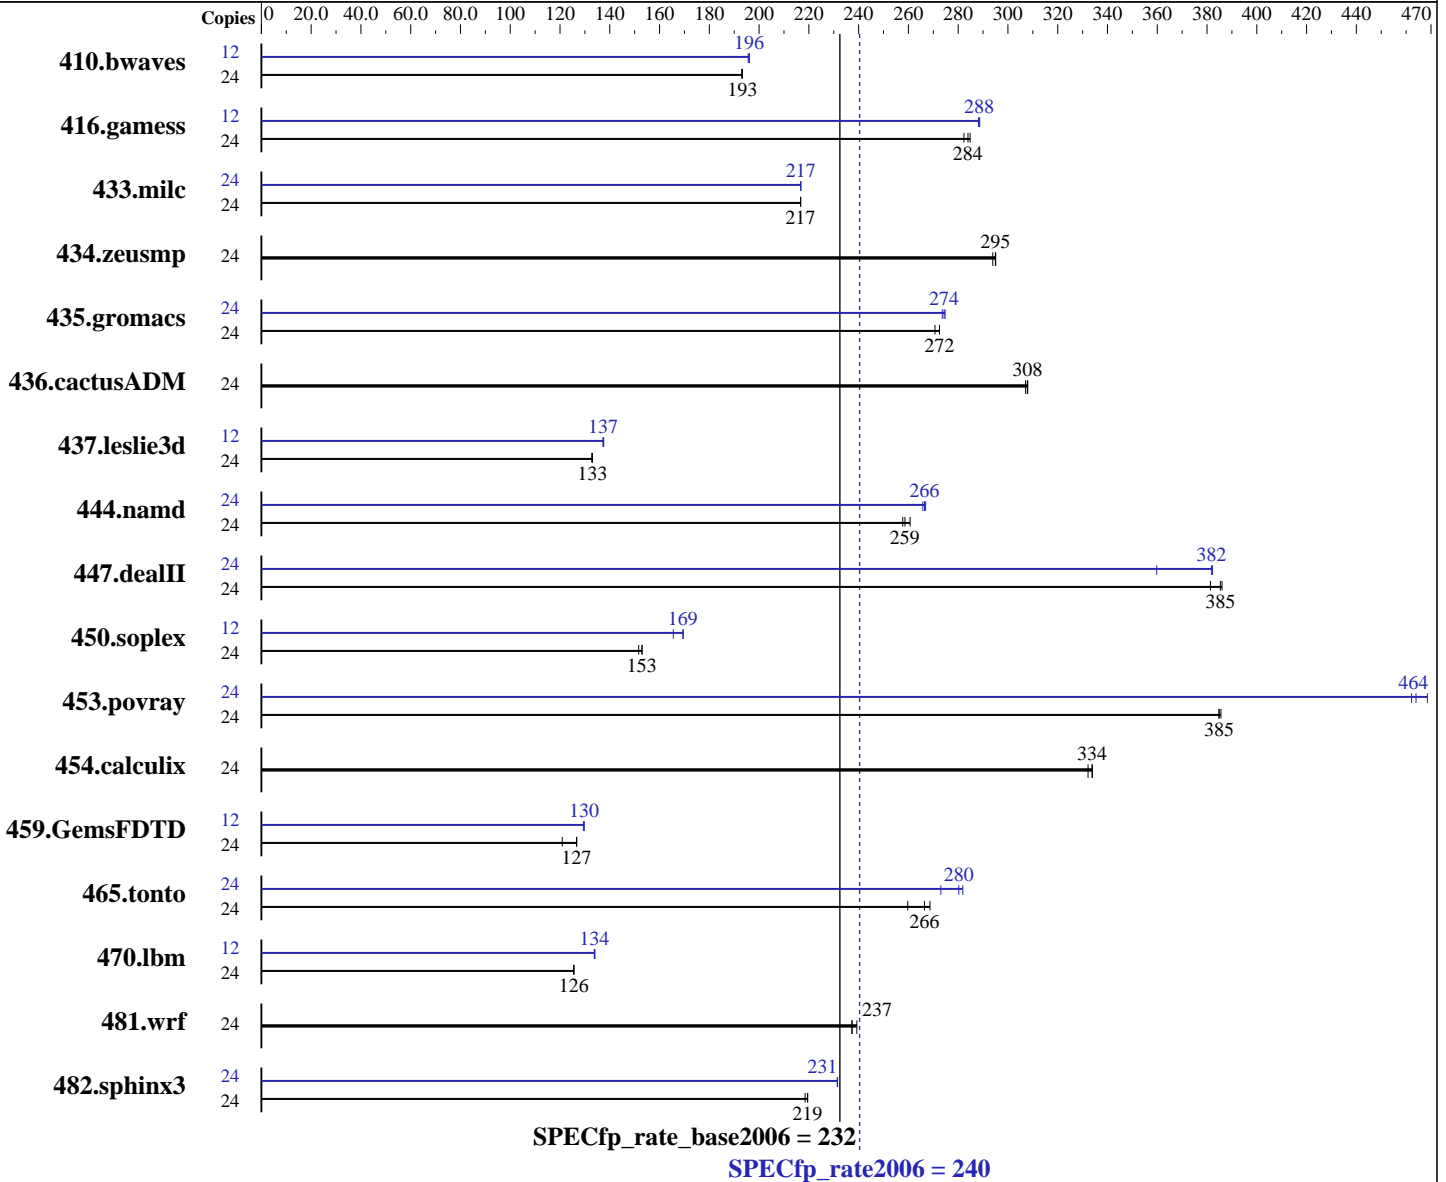

Hardware

CPU Name: Intel Xeon X5670
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 240

Huawei BH620, Intel Xeon X5670

SPECfp_rate_base2006 = 232

CPU2006 license: 3175

Test date: Mar-2010

Test sponsor: Huawei

Hardware Availability: Jan-2010

Tested by: Huawei

Software Availability: Feb-2010

L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (12 x 4 GB PC3 10600R, dual rank, CL9, ECC)
 Disk Subsystem: 1 x 146GB SAS, 10k RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1690	193	1687	193	<u>1687</u>	<u>193</u>	12	834	196	831	196	<u>832</u>	<u>196</u>
416.gamess	24	1650	285	1664	282	<u>1655</u>	<u>284</u>	12	815	288	814	289	<u>815</u>	<u>288</u>
433.milc	24	<u>1017</u>	<u>217</u>	1017	217	1017	217	24	1017	217	1016	217	<u>1016</u>	<u>217</u>
434.zeusmp	24	743	294	740	295	<u>740</u>	<u>295</u>	24	743	294	740	295	<u>740</u>	<u>295</u>
435.gromacs	24	<u>629</u>	<u>272</u>	629	272	633	271	24	624	275	<u>625</u>	<u>274</u>	626	274
436.cactusADM	24	934	307	931	308	<u>932</u>	<u>308</u>	24	934	307	931	308	<u>932</u>	<u>308</u>
437.leslie3d	24	1696	133	<u>1696</u>	<u>133</u>	1699	133	12	821	137	<u>821</u>	<u>137</u>	820	138
444.namd	24	738	261	<u>744</u>	<u>259</u>	747	258	24	724	266	<u>722</u>	<u>266</u>	721	267
447.dealII	24	711	386	<u>712</u>	<u>385</u>	720	381	24	763	360	718	382	<u>719</u>	<u>382</u>
450.soplex	24	1320	152	1308	153	<u>1309</u>	<u>153</u>	12	605	166	590	170	<u>591</u>	<u>169</u>
453.povray	24	331	386	332	385	<u>332</u>	<u>385</u>	24	276	462	272	469	<u>275</u>	<u>464</u>
454.calculix	24	<u>593</u>	<u>334</u>	596	332	593	334	24	<u>593</u>	<u>334</u>	596	332	593	334
459.GemsFDTD	24	2106	121	<u>2011</u>	<u>127</u>	2009	127	12	982	130	<u>982</u>	<u>130</u>	984	129
465.tonto	24	879	269	909	260	<u>886</u>	<u>266</u>	24	865	273	<u>843</u>	<u>280</u>	838	282
470.lbm	24	2625	126	<u>2626</u>	<u>126</u>	2629	125	12	1230	134	1233	134	<u>1232</u>	<u>134</u>
481.wrf	24	1120	239	1130	237	<u>1129</u>	<u>237</u>	24	1120	239	1130	237	<u>1129</u>	<u>237</u>
482.sphinx3	24	2141	218	2130	220	<u>2132</u>	<u>219</u>	24	<u>2021</u>	<u>231</u>	2021	231	2020	232

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 240

Huawei BH620, Intel Xeon X5670

SPECfp_rate_base2006 = 232

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.lelie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 240

Huawei BH620, Intel Xeon X5670

SPECfp_rate_base2006 = 232

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
 -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
 -opt-malloc-options=3 -ansi-alias -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 240

Huawei BH620, Intel Xeon X5670

SPECfp_rate_base2006 = 232

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp_rate2006 = 240

Huawei BH620, Intel Xeon X5670

SPECfp_rate_base2006 = 232

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Mar-2010

Hardware Availability: Jan-2010

Software Availability: Feb-2010

Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 07:56:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 May 2010.