



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 483

IBM System x3850 X5 (Intel Xeon L7555)

SPECfp_rate_base2006 = 468

CPU2006 license: 11


Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

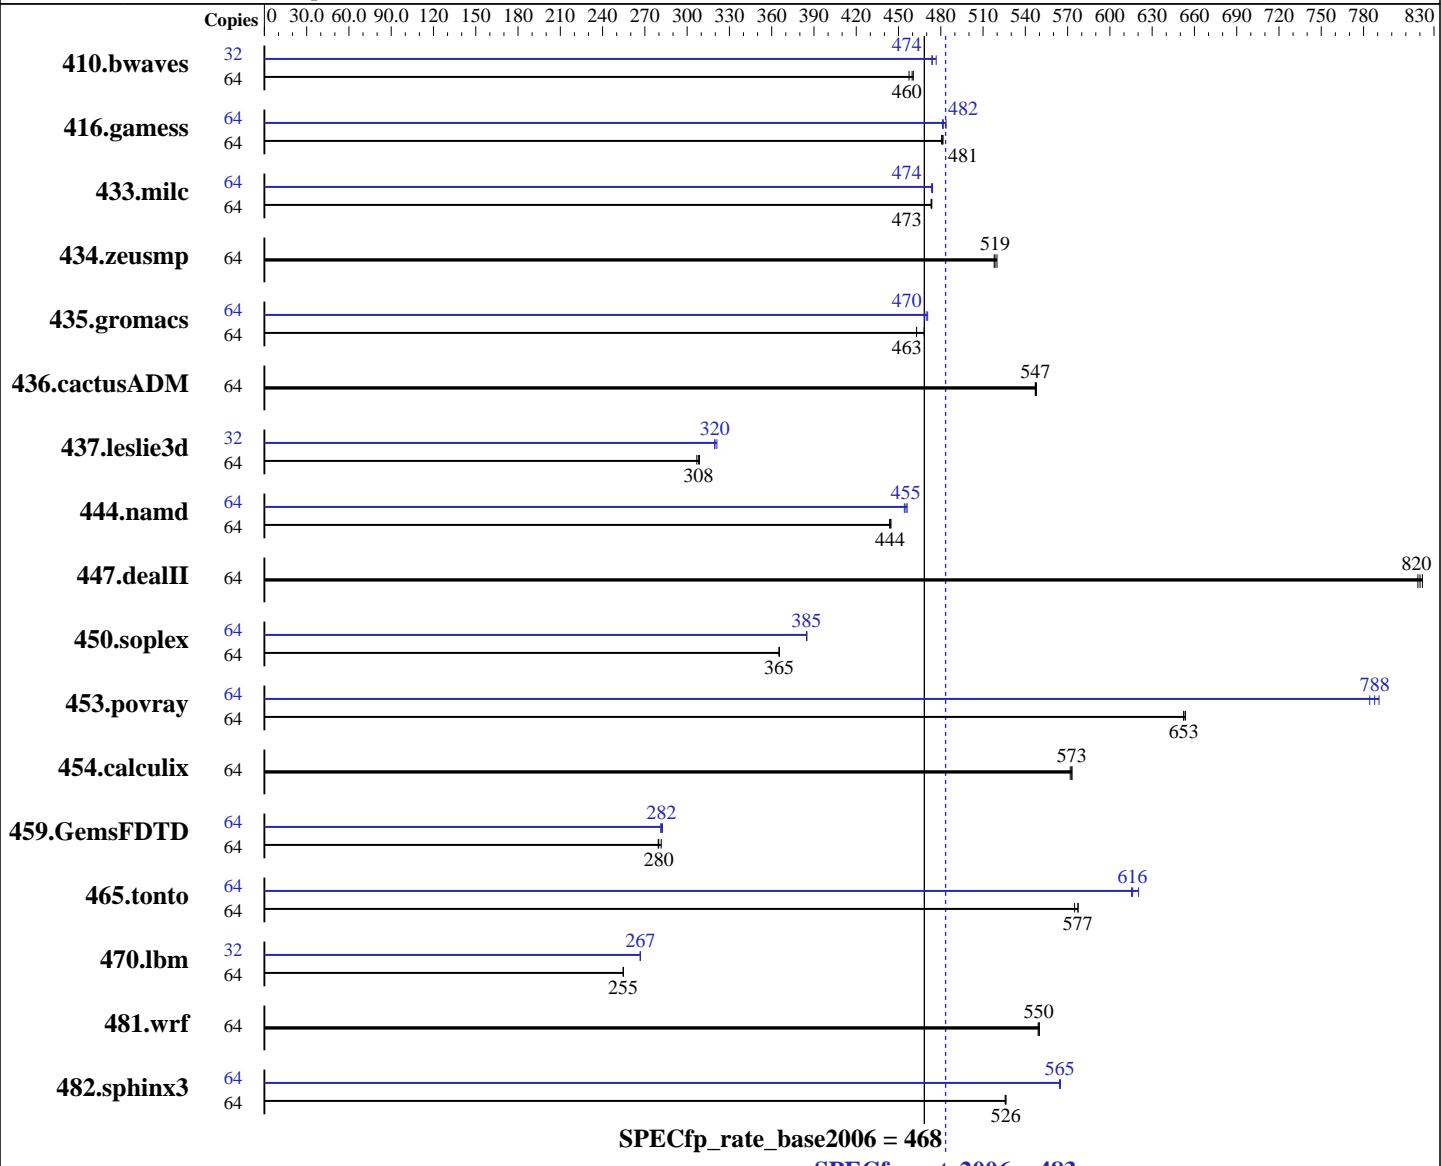

Hardware

CPU Name: Intel Xeon L7555
CPU Characteristics: Intel Turbo Boost Technology up to 2.53 GHz
CPU MHz: 1867
FPU: Integrated
CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable: 2,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SuSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel: No
File System: ext3
System State: Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 483

IBM System x3850 X5 (Intel Xeon L7555)

SPECfp_rate_base2006 = 468

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

L3 Cache: 24 MB I+D on chip per chip
 Other Cache: None
 Memory: 256 GB (64 x 4 GB PC3-8500R CL7, Quad Rank,
 running at 978 MHz)
 Disk Subsystem: 3 x 50 GB SATA, SSD
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	64	1892	460	1889	461	1901	457	32	918	474	918	474	912	477
416.gamess	64	2608	480	2603	481	2602	482	64	2601	482	2590	484	2604	481
433.milc	64	1242	473	1240	474	1241	473	64	1239	474	1241	473	1239	474
434.zeusmp	64	1125	518	1123	519	1120	520	64	1125	518	1123	519	1120	520
435.gromacs	64	987	463	987	463	976	468	64	973	470	971	471	976	468
436.cactusADM	64	1398	547	1398	547	1396	548	64	1398	547	1398	547	1396	548
437.leslie3d	64	1960	307	1953	308	1948	309	32	937	321	941	320	941	320
444.namd	64	1157	444	1156	444	1154	445	64	1130	454	1127	455	1125	456
447.dealII	64	891	822	894	819	893	820	64	891	822	894	819	893	820
450.soplex	64	1460	366	1462	365	1461	365	64	1387	385	1387	385	1387	385
453.povray	64	521	654	522	652	522	653	64	430	791	432	788	434	784
454.calculix	64	921	573	922	573	923	572	64	921	573	922	573	923	572
459.GemsFDTD	64	2411	282	2430	279	2426	280	64	2414	281	2404	283	2409	282
465.tonto	64	1091	577	1091	577	1095	575	64	1015	620	1022	616	1023	615
470.lbm	64	3452	255	3453	255	3452	255	32	1649	267	1648	267	1648	267
481.wrf	64	1300	550	1302	549	1301	550	64	1300	550	1302	549	1301	550
482.sphinx3	64	2373	526	2370	526	2371	526	64	2210	564	2208	565	2210	565

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Platform Notes

Turbo Boost set to Traditional
 Demand Scrub disabled



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 483

IBM System x3850 X5 (Intel Xeon L7555)

SPECfp_rate_base2006 = 468

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

General Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 483

IBM System x3850 X5 (Intel Xeon L7555)

SPECfp_rate_base2006 = 468

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 483

IBM System x3850 X5 (Intel Xeon L7555)

SPECfp_rate_base2006 = 468

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -opt-prefetch
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3 -ansi-alias -auto-ilp32
```

```
482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: basepeak = yes
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
```

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll2 -Ob0 -ansi-alias -scalar-rep-
```

```
434.zeusmp: basepeak = yes
```

```
437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static
```

```
459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
               -unroll2 -Ob0
```

```
465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -unroll4 -auto -inline-calloc -opt-malloc-options=3
```

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 483

IBM System x3850 X5 (Intel Xeon L7555)

SPECfp_rate_base2006 = 468

CPU2006 license: 11

Test date: Apr-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4_2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100603.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 09:34:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 June 2010.