



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp®2006 = 38.6

SPECfp_base2006 = 36.3

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

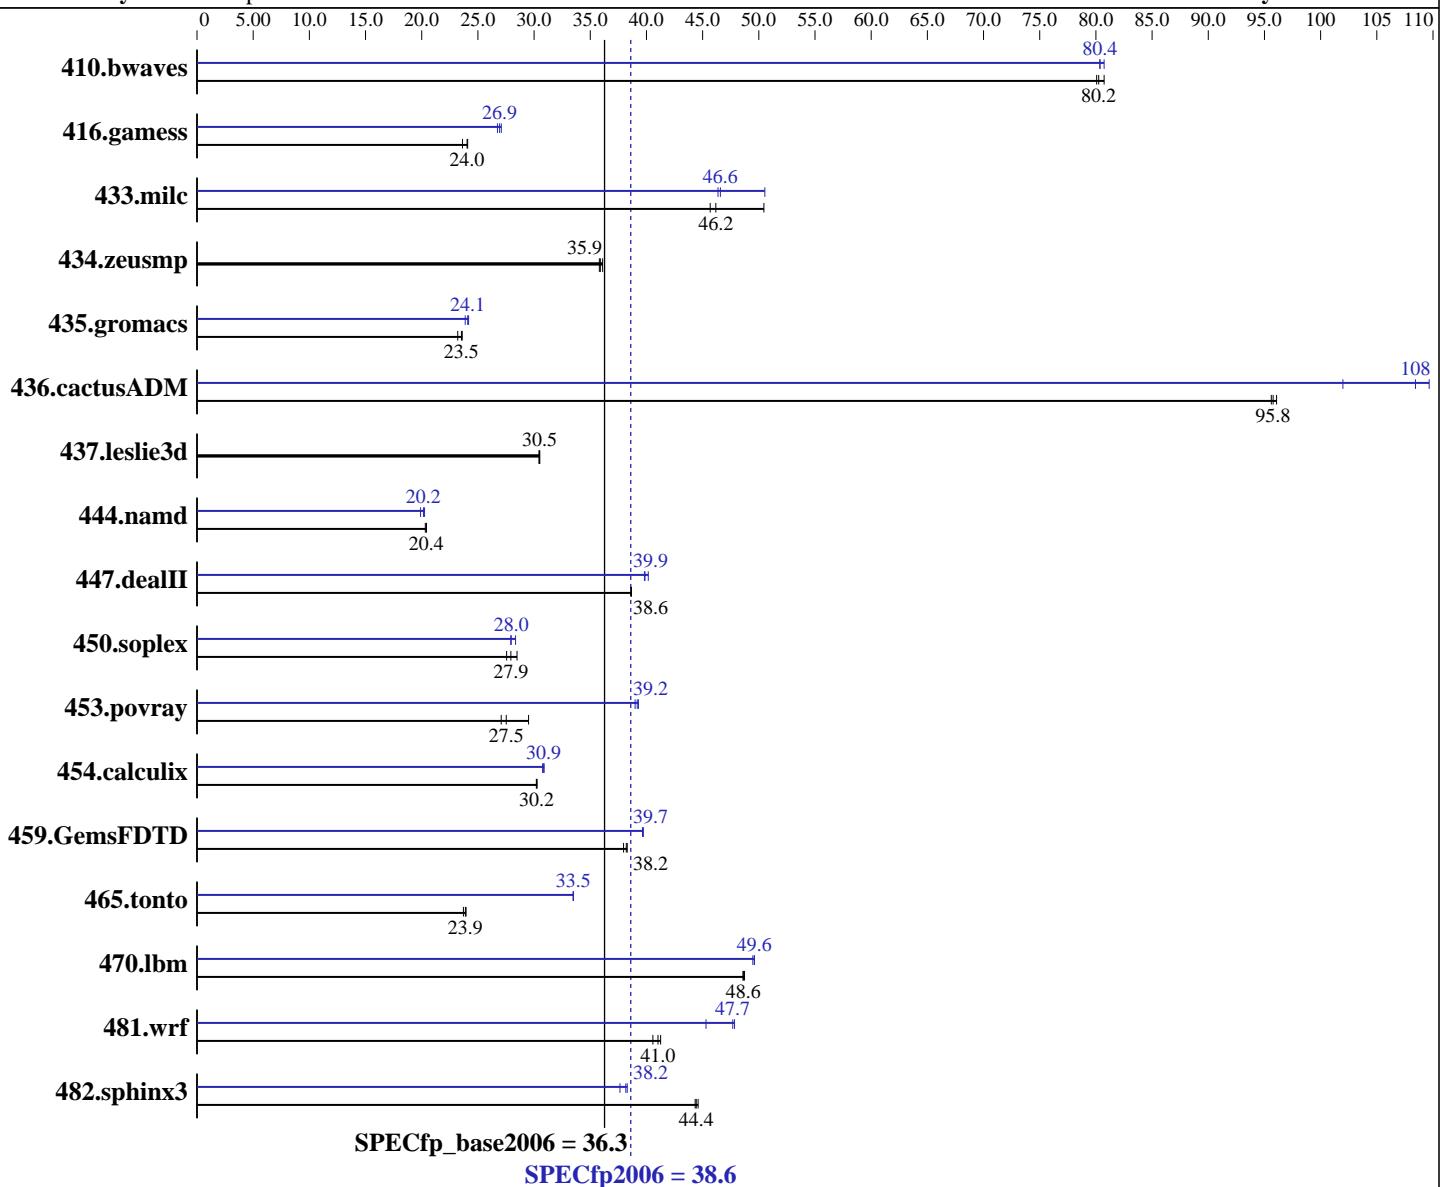

Hardware

CPU Name: Intel Xeon X3460
CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
CPU MHz: 2800
FPU: Integrated
CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
CPU(s) orderable: 1 chip
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
Compiler: Kernel 2.6.27.19-5-default
Auto Parallel: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
File System: Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
System State: Yes
ReiserFS
Run level 3 (multi-user)

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp2006 = 38.6

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 16 GB (4 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
 Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
 Other Hardware: None

Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio										
410.bwaves	170	80.1	169	80.2	168	80.7	169	80.4	169	80.3	168	80.7
416.gamess	829	23.6	813	24.1	815	24.0	723	27.1	732	26.7	727	26.9
433.milc	199	46.2	201	45.7	182	50.5	197	46.6	198	46.4	182	50.5
434.zeusmp	252	36.1	254	35.8	254	35.9	252	36.1	254	35.8	254	35.9
435.gromacs	302	23.6	308	23.2	303	23.5	295	24.2	299	23.9	296	24.1
436.cactusADM	124	96.1	125	95.8	125	95.6	110	108	109	110	117	102
437.leslie3d	308	30.5	308	30.5	309	30.4	308	30.5	308	30.5	309	30.4
444.namd	393	20.4	393	20.4	395	20.3	396	20.3	398	20.2	403	19.9
447.dealII	296	38.7	296	38.6	296	38.6	285	40.2	287	39.9	287	39.8
450.soplex	293	28.5	303	27.6	299	27.9	299	27.9	294	28.4	298	28.0
453.povray	180	29.5	197	27.1	193	27.5	135	39.3	136	39.0	136	39.2
454.calculix	273	30.2	273	30.2	273	30.3	267	30.9	268	30.8	267	30.9
459.GemsFDTD	278	38.2	277	38.3	279	38.0	268	39.6	267	39.7	267	39.7
465.tonto	415	23.7	412	23.9	411	23.9	294	33.5	294	33.5	294	33.5
470.lbm	282	48.7	283	48.6	283	48.6	278	49.5	277	49.6	277	49.6
481.wrf	272	41.0	275	40.6	271	41.3	233	47.8	247	45.3	234	47.7
482.sphinx3	437	44.6	439	44.4	440	44.3	518	37.6	511	38.2	509	38.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
 OMP_NUM_THREADS set to number of cores
 KMP_AFFINITY set to granularity=fine,scatter
 KMP_STACKSIZE set to 200M

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
 As tested, the system used a Supermicro
 PWS-721P-1R power supply, SNK-P0046P heatsink,
 and FAN-0077L cooling fan.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp2006 = 38.6

SPECfp_base2006 = 36.3

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:

 icc -m64

C++ benchmarks:

 icpc -m64

Fortran benchmarks:

 ifort -m64

Benchmarks using both Fortran and C:

 icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

 -xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp2006 = 38.6

SPECfp_base2006 = 36.3

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep -auto-ilp32

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp2006 = 38.6

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_base2006 = 36.3

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

450.soplex: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -auto-ilp32

453.povray: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xsse4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-parallel

416.gamess: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -Ob0 -opt-prefetch -parallel

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-inline-calloc -opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll12 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xsse4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp2006 = 38.6

SPECfp_base2006 = 36.3

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: May-2010

Hardware Availability: Apr-2010

Software Availability: Jan-2010

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 08:49:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 9 June 2010.