



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp[®]_rate2006 = 87.8

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 84.8

CPU2006 license: 001176


Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

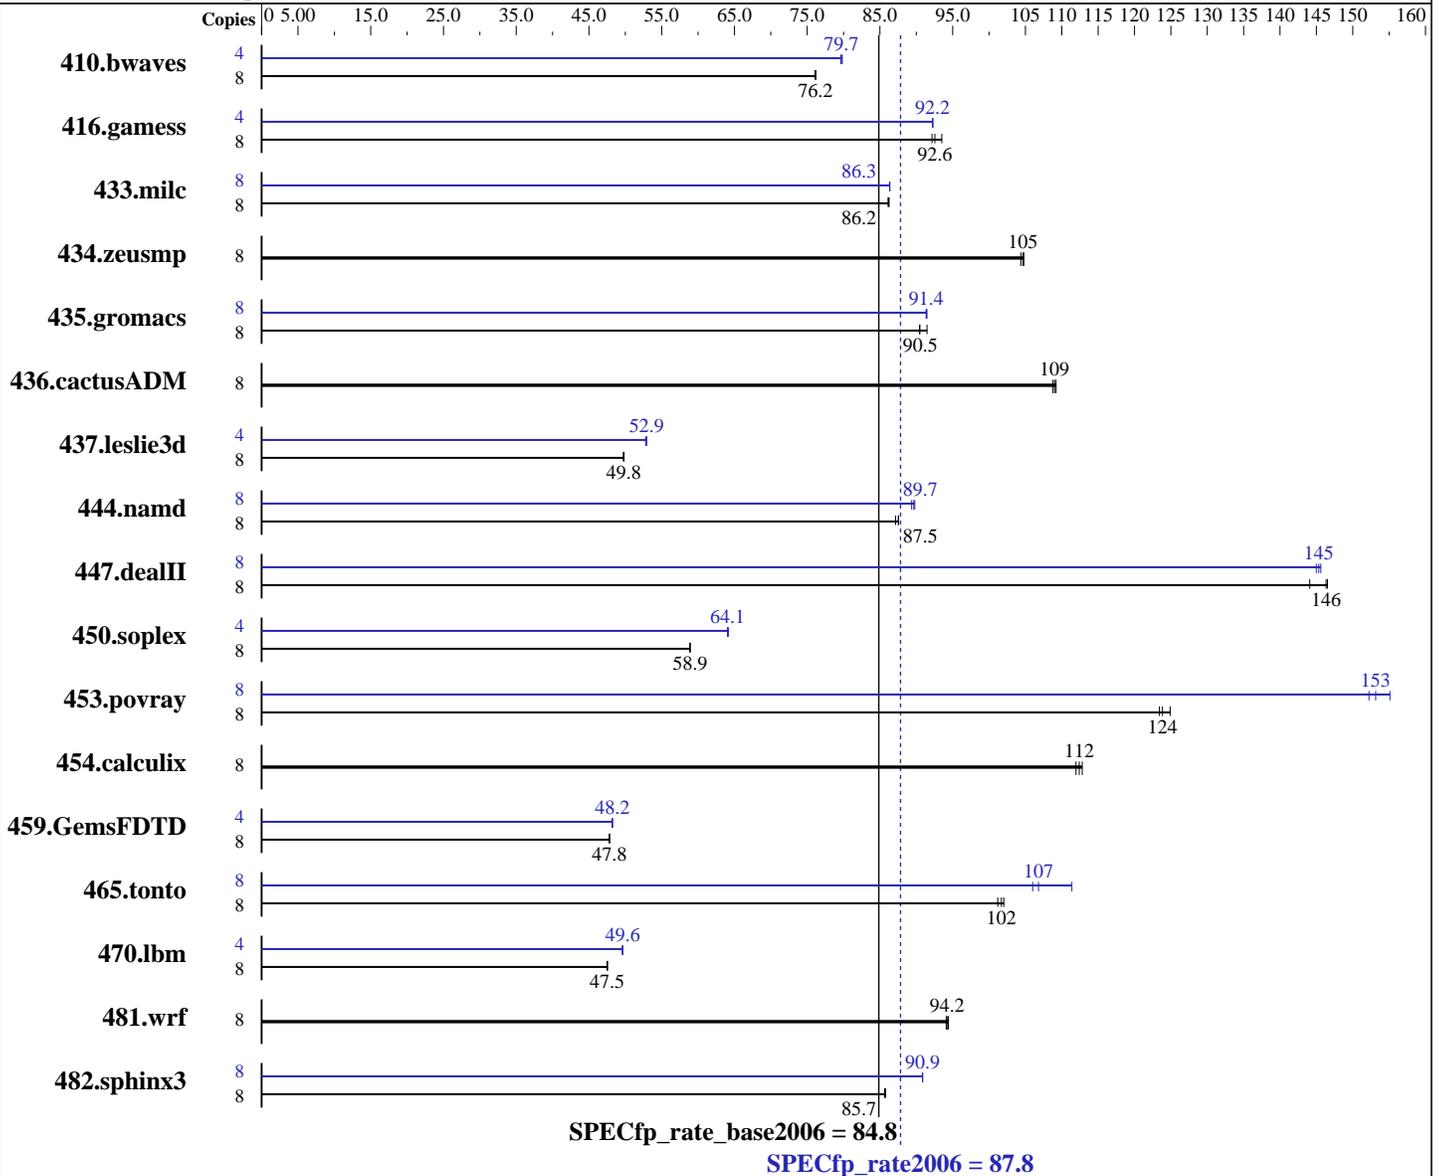

Hardware

CPU Name: Intel Xeon X3460
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 Kernel 2.6.27.19-5-default
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = **87.8**

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = **84.8**

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
Disk Subsystem: 1 x 160 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1427	76.2	1427	76.2	1429	76.1	4	683	79.6	682	79.7	681	79.8
416.gamess	8	1700	92.2	1692	92.6	1675	93.5	4	849	92.2	849	92.3	849	92.2
433.milc	8	853	86.1	851	86.2	852	86.2	8	851	86.3	850	86.4	851	86.3
434.zeusmp	8	695	105	697	104	696	105	8	695	105	697	104	696	105
435.gromacs	8	624	91.5	631	90.5	632	90.4	8	624	91.5	625	91.4	625	91.4
436.cactusADM	8	879	109	877	109	875	109	8	879	109	877	109	875	109
437.leslie3d	8	1509	49.8	1512	49.7	1510	49.8	4	710	52.9	710	52.9	712	52.8
444.namd	8	733	87.6	733	87.5	736	87.1	8	715	89.8	718	89.4	716	89.7
447.dealII	8	625	147	635	144	625	146	8	630	145	629	146	631	145
450.soplex	8	1133	58.9	1133	58.9	1133	58.9	4	521	64.1	521	64.1	520	64.2
453.povray	8	341	125	345	123	344	124	8	280	152	274	155	278	153
454.calculix	8	585	113	587	112	590	112	8	585	113	587	112	590	112
459.GemsFDTD	8	1774	47.8	1776	47.8	1775	47.8	4	881	48.2	880	48.2	880	48.2
465.tonto	8	772	102	778	101	774	102	8	743	106	737	107	707	111
470.lbm	8	2313	47.5	2314	47.5	2312	47.5	4	1109	49.6	1107	49.6	1107	49.6
481.wrf	8	947	94.4	948	94.2	949	94.1	8	947	94.4	948	94.2	949	94.1
482.sphinx3	8	1817	85.8	1820	85.7	1820	85.6	8	1716	90.9	1716	90.9	1716	90.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

Platform Notes

Fan speed set to Full Speed in BIOS Setup.
As tested, the system used a Supermicro
PWS-721P-1R power supply, SNK-P0046P heatsink,
and FAN-0077L cooling fan.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 87.8

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 84.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 87.8

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 84.8

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2010
Hardware Availability: Apr-2010
Software Availability: Jan-2010

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 87.8

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 84.8

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SPECfp_rate2006 = 87.8

Motherboard X8SIU-F (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 84.8

CPU2006 license: 001176

Test date: May-2010

Test sponsor: Supermicro

Hardware Availability: Apr-2010

Tested by: Supermicro

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:48:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 June 2010.