SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

ADAX NetOfficePro X5530R500

SPECfp®2006 = 30.9

SPECfp_base2006 = 29.8

CPU2006 license: 9025
Test sponsor: Incom S.A.
Tested by: Incom S.A.

Test date: Mar-2010
Hardware Availability: Apr-2009
Software Availability: Feb-2009

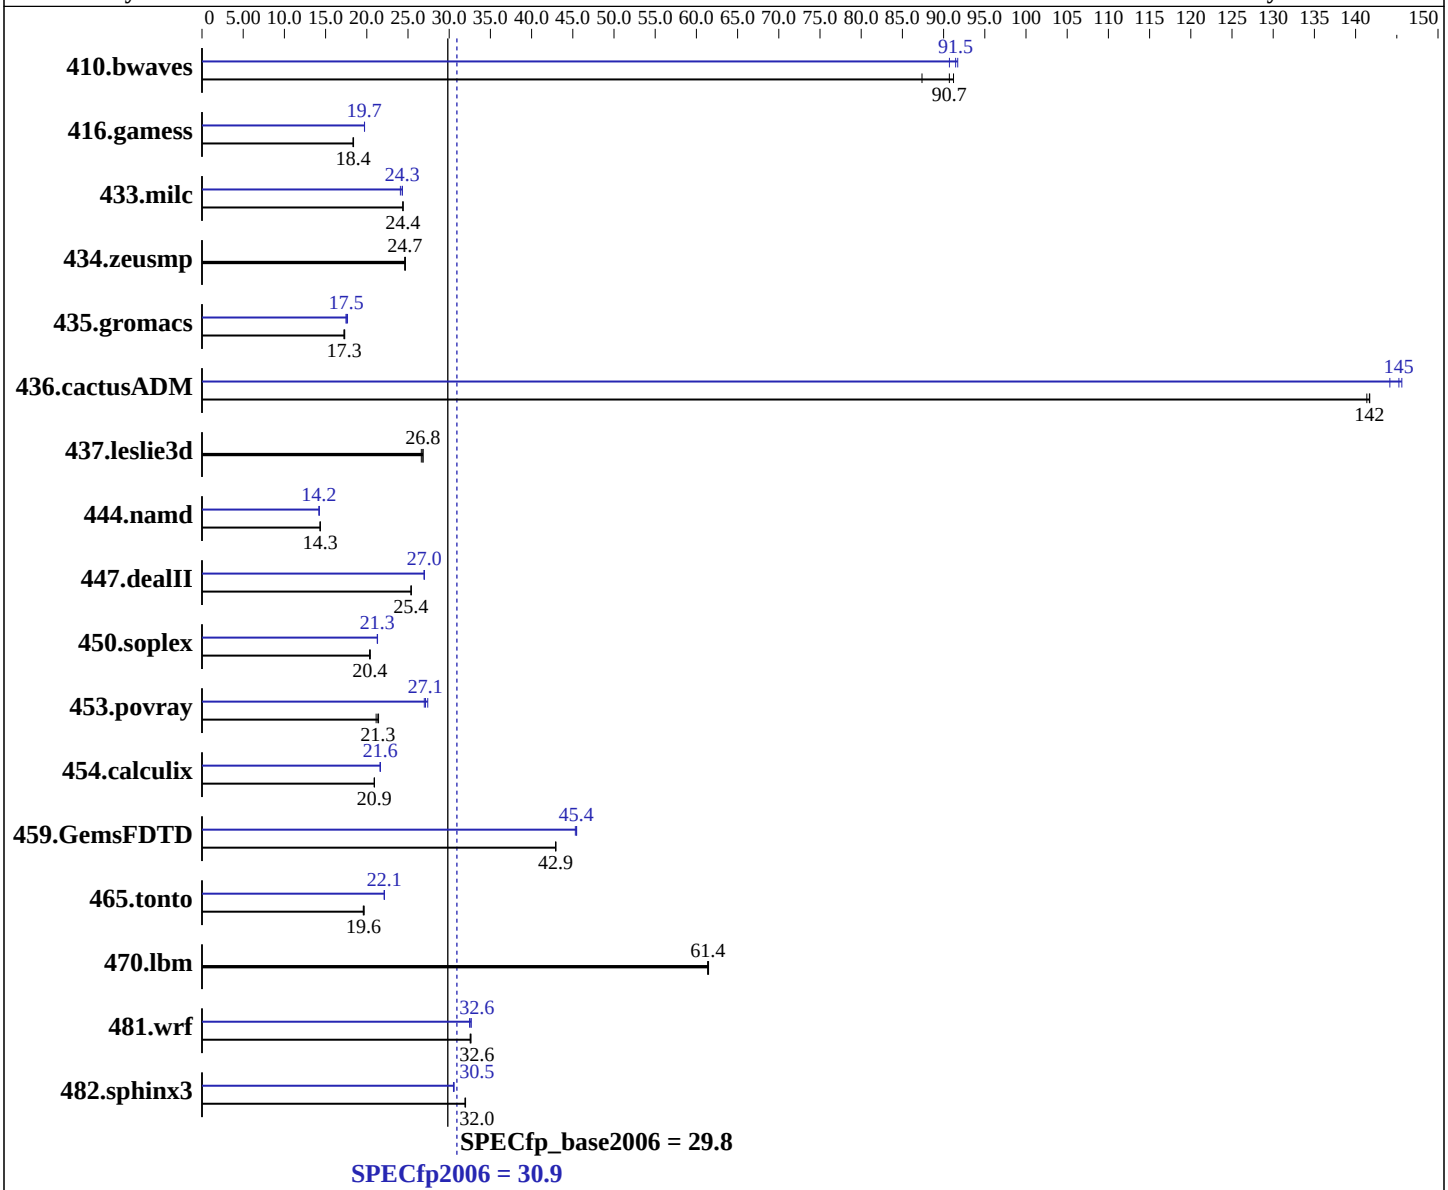

Hardware

CPU Name:	Intel Xeon E5530
CPU Characteristics:	Intel Turbo Boost Technology up to 2.67 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SuSe Linux Enterprise Server 10 (x86_64) SP2, kernel 2.6.16.60-0.21-smp
Compiler:	Intel C++ and Fortran Compiler 11.0 for Linux Build 20090131 Package ID: l_cproc_p_11.0.080, l_cprof_p_11.0.080
Auto Parallel:	Yes
File System:	ReiserFS
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Incom S.A.

ADAX NetOfficePro X5530R500

SPECfp2006 = 30.9

SPECfp_base2006 = 29.8

CPU2006 license: 9025
Test sponsor: Incom S.A.
Tested by: Incom S.A.

Test date: Mar-2010
Hardware Availability: Apr-2009
Software Availability: Feb-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB PC3 10600R, 2 rank, ECC, running at 1066 MHz)
Disk Subsystem: 1 x 500 GB SATA, 7200RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	156	87.4	149	91.2	**150**	**90.7**	150	90.7	**149**	**91.5**	148	91.7
416.gamess	**1067**	**18.4**	1068	18.3	1065	18.4	992	19.7	993	19.7	**993**	**19.7**
433.milc	376	24.4	377	24.4	**376**	**24.4**	381	24.1	**378**	**24.3**	378	24.3
434.zeusmp	369	24.7	370	24.6	**369**	**24.7**	369	24.7	370	24.6	**369**	**24.7**
435.gromacs	**413**	**17.3**	414	17.2	412	17.3	**408**	**17.5**	404	17.7	408	17.5
436.cactusADM	84.3	142	**84.3**	**142**	84.5	141	82.9	144	82.1	146	**82.3**	**145**
437.leslie3d	351	26.8	**351**	**26.8**	353	26.6	351	26.8	**351**	**26.8**	353	26.6
444.namd	**559**	**14.3**	559	14.4	559	14.3	564	14.2	**564**	**14.2**	564	14.2
447.dealII	**451**	**25.4**	451	25.4	451	25.4	**424**	**27.0**	424	27.0	424	27.0
450.soplex	408	20.4	410	20.3	**409**	**20.4**	391	21.3	**392**	**21.3**	392	21.3
453.povray	252	21.1	**249**	**21.3**	248	21.4	197	27.0	**196**	**27.1**	194	27.4
454.calculix	394	20.9	395	20.9	**394**	**20.9**	**381**	**21.6**	381	21.6	381	21.6
459.GemsFDTD	247	42.9	247	42.9	**247**	**42.9**	234	45.3	233	45.5	**234**	**45.4**
465.tonto	500	19.7	**502**	**19.6**	503	19.6	445	22.1	**445**	**22.1**	444	22.1
470.lbm	224	61.4	224	61.5	**224**	**61.4**	224	61.4	224	61.5	**224**	**61.4**
481.wrf	343	32.5	**343**	**32.6**	342	32.6	342	32.7	**342**	**32.6**	344	32.5
482.sphinx3	609	32.0	**610**	**32.0**	611	31.9	639	30.5	**638**	**30.5**	637	30.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

```
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to granularity=fine,scatter
KMP_STACKSIZE set to 200M
```

Base Compiler Invocation

C benchmarks:
`icc`

C++ benchmarks:
`icpc`

Continued on next page

Base Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

Continued on next page

Peak Compiler Invocation (Continued)

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):
icpc

450.soplex: icpc -m32

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icc ifort

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep- -opt-prefetch

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

481.wrf: `-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -parallel -auto-ilp32`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100316.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20100316.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 08:32:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 June 2010.