SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GB2x280 F1 (Intel Xeon X5570, 2.93 GHz)

SPECfp®_rate2006 = 203

SPECfp_rate_base2006 = 196

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2010
Hardware Availability: Sep-2010
Software Availability: Jan-2010

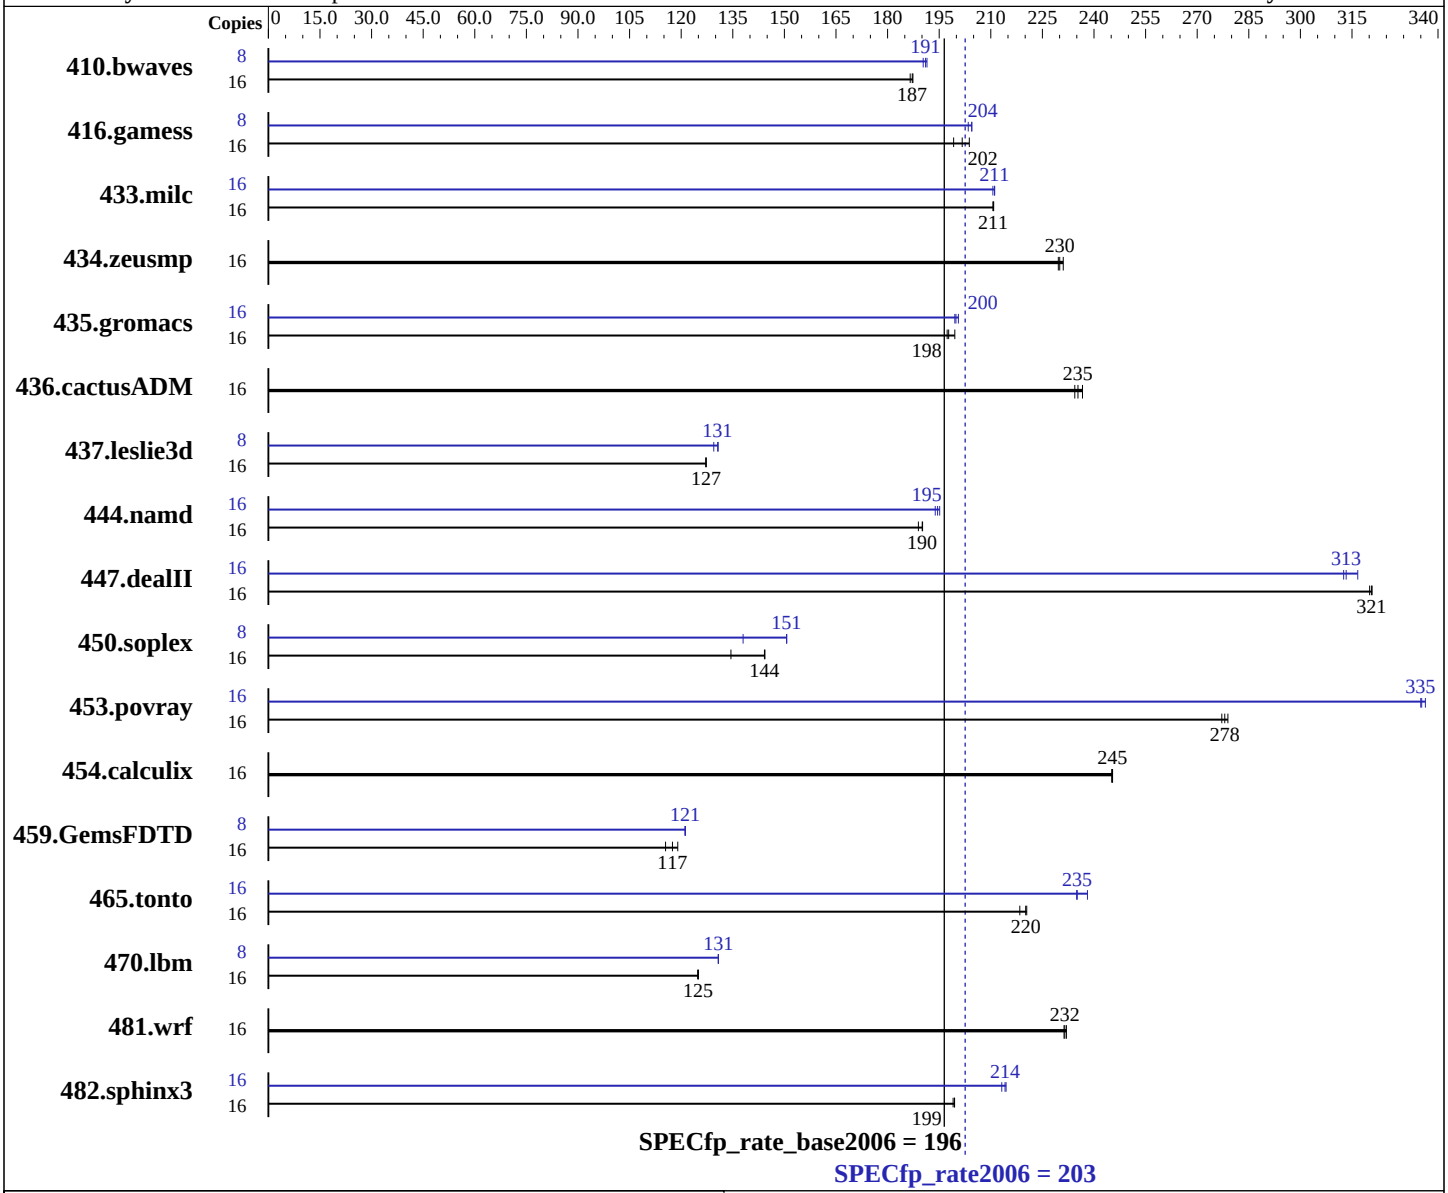

Hardware

CPU Name:	Intel Xeon X5570
CPU Characteristics:	Intel Turbo Boost Technology up to 3.33 GHz
CPU MHz:	2933
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) Kernel 2.6.27.19-5-default
Compiler:	Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064, l_cprof_p_11.1.064
Auto Parallel:	No
File System:	ReiserFS
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Gateway GB2x280 F1 (Intel Xeon X5570, 2.93 GHz)

SPECfp_rate2006 = 203

SPECfp_rate_base2006 = 196

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2010
Hardware Availability: Sep-2010
Software Availability: Jan-2010

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 24 GB (6 x 4 GB DDR3-1333 RDIMM, ECC, CL9)
Disk Subsystem: 1 x 150 GB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	1165	187	1161	187	**1162**	**187**	8	**569**	**191**	568	191	571	190
416.gamess	16	1538	204	**1553**	**202**	1573	199	8	766	204	**766**	**204**	770	203
433.milc	16	697	211	**697**	**211**	697	211	16	**696**	**211**	697	211	696	211
434.zeusmp	16	630	231	634	230	**633**	**230**	16	630	231	634	230	**633**	**230**
435.gromacs	16	573	200	**578**	**198**	579	197	16	570	201	**572**	**200**	573	200
436.cactusADM	16	**812**	**235**	816	234	808	237	16	**812**	**235**	816	234	808	237
437.leslie3d	16	**1182**	**127**	1182	127	1183	127	8	581	129	**576**	**131**	575	131
444.namd	16	675	190	**675**	**190**	679	189	16	**660**	**195**	658	195	662	194
447.dealII	16	572	320	**571**	**321**	570	321	16	578	317	586	313	**584**	**313**
450.soplex	16	992	134	**925**	**144**	924	144	8	483	138	**443**	**151**	443	151
453.povray	16	305	279	307	277	**306**	**278**	16	253	336	**254**	**335**	254	335
454.calculix	16	538	245	**538**	**245**	538	245	16	538	245	**538**	**245**	538	245
459.GemsFDTD	16	1426	119	1470	115	**1445**	**117**	8	700	121	**700**	**121**	701	121
465.tonto	16	**715**	**220**	714	220	721	218	16	**670**	**235**	670	235	661	238
470.lbm	16	1759	125	1762	125	**1759**	**125**	8	**840**	**131**	840	131	841	131
481.wrf	16	770	232	**772**	**232**	773	231	16	770	232	**772**	**232**	773	231
482.sphinx3	16	1567	199	**1563**	**199**	1563	199	16	1463	213	1454	214	**1456**	**214**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Platform Notes

```
Fan speed set to full Speed (ie. Enterprise Blade mode) with
Smart Blade Console through CMM (Chassis Management Module)
```

General Notes

```
Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

The Acer AB2x280 F1, and Gateway GB2x280 F1 are electronically equivalent.
This result was measured on Gateway GB2x280 F1.
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -static
```

Continued on next page

Base Optimization Flags (Continued)

Fortran benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Benchmarks using both Fortran and C:
`-xSSE4.2 -ipo -O3 -no-prec-div -static`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`
454.calculix: `-DSPEC_CPU_LP64 -nofor_main`
459.GemsFDTD: `-DSPEC_CPU_LP64`
465.tonto: `-DSPEC_CPU_LP64`
470.lbm: `-DSPEC_CPU_LP64`
481.wrf: `-DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -opt-prefetch

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll2 -Ob0

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-static`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32`

436.cactusADM: `basepeak = yes`

454.calculix: `basepeak = yes`

481.wrf: `basepeak = yes`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml`

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:33:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.