SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M3 (Intel Xeon E5506)

SPECint®_rate2006 = 148

SPECint_rate_base2006 = 138

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

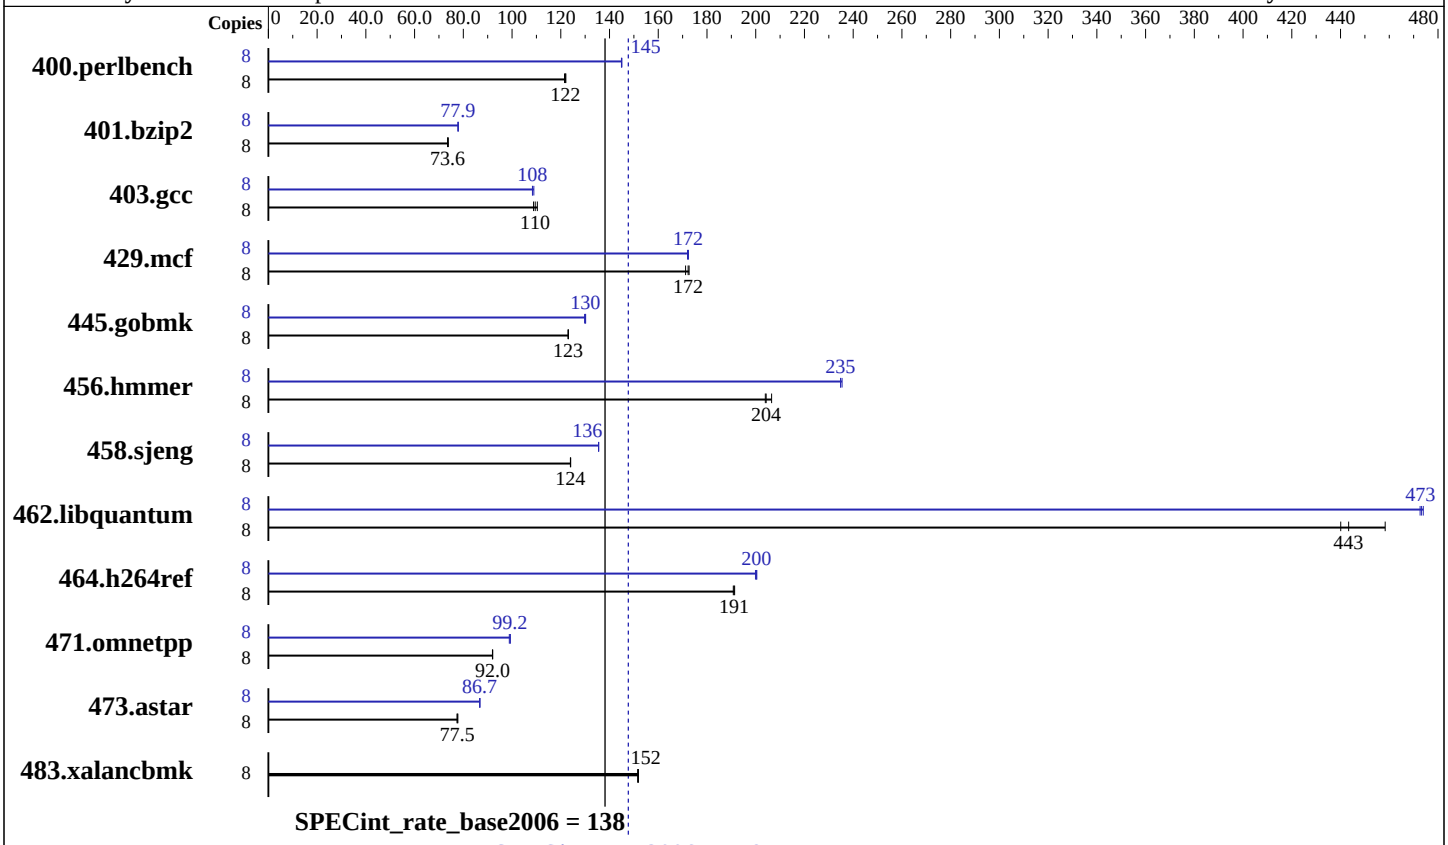

Hardware

CPU Name:	Intel Xeon E5506
CPU Characteristics:	
CPU MHz:	2133
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	4 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)
Disk Subsystem:	1 x 73 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	SuSe Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
Compiler:	Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l_cproc_p_11.1.064
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M3 (Intel Xeon E5506)

SPECint_rate2006 = 148

SPECint_rate_base2006 = 138

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jun-2010
Hardware Availability: Jun-2010
Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	643	122	**641**	**122**	640	122	8	**539**	**145**	539	145	539	145
401.bzip2	8	1045	73.8	**1049**	**73.6**	1049	73.6	8	992	77.8	**991**	**77.9**	991	77.9
403.gcc	8	**588**	**110**	592	109	583	110	8	**594**	**108**	591	109	594	108
429.mcf	8	426	171	423	173	**424**	**172**	8	**424**	**172**	424	172	423	172
445.gobmk	8	682	123	**682**	**123**	682	123	8	645	130	647	130	**645**	**130**
456.hmmer	8	361	207	**365**	**204**	366	204	8	318	235	**318**	**235**	317	235
458.sjeng	8	780	124	781	124	**781**	**124**	8	**714**	**136**	714	136	714	136
462.libquantum	8	**374**	**443**	362	458	377	440	8	351	473	**350**	**473**	350	474
464.h264ref	8	925	191	**926**	**191**	928	191	8	**884**	**200**	886	200	883	200
471.omnetpp	8	543	92.0	**543**	**92.0**	544	92.0	8	**504**	**99.2**	504	99.3	506	98.9
473.astar	8	**725**	**77.5**	722	77.8	725	77.5	8	**647**	**86.7**	648	86.7	647	86.8
483.xalancbmk	8	**364**	**152**	364	152	363	152	8	**364**	**152**	364	152	363	152

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Platform Notes

```
 Turbo Mode Enable
 Turbo Boost set to Traditional
 CPU C State Enable
```

General Notes

```
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502
 'ulimit -s unlimited' was used to set the stack size to unlimited prior to run
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):
icpc -m32

473.astar: icpc -m64

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64

Continued on next page

Peak Portability Flags (Continued)

456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page

Peak Optimization Flags (Continued)

473.astar (continued):
`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100804.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 10:56:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 August 2010.