



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1440

IBM Power 795 (4.0 GHz, 32 core)

SPECint_rate_base2006 = 1270

CPU2006 license: 11


Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

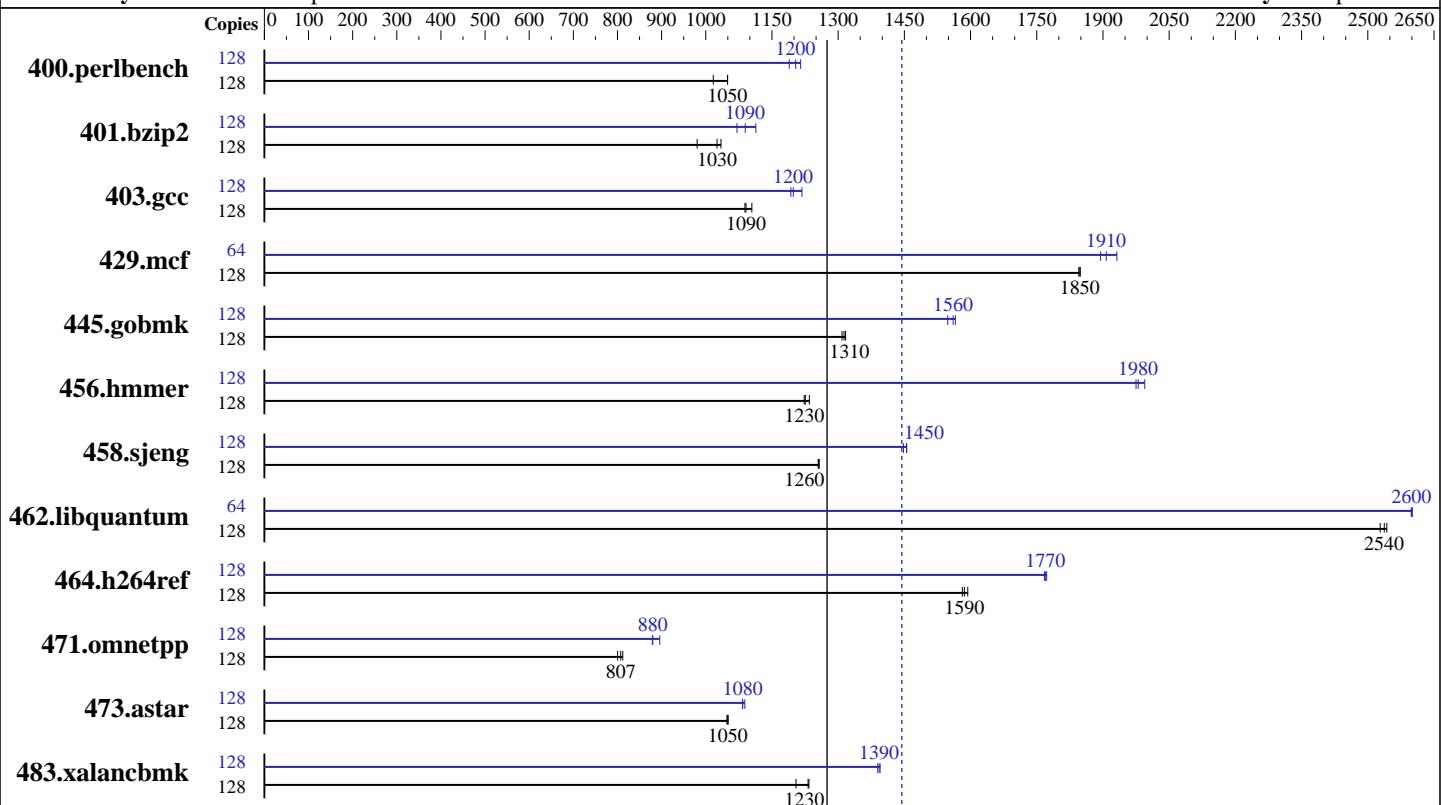

SPECint_rate_base2006 = 1270

SPECint_rate2006 = 1440

Hardware

CPU Name: POWER7
 CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.14 GHz
 CPU MHz: 4004
 FPU: Integrated
 CPU(s) enabled: 32 cores, 4 chips, 8 cores/chip, 4 threads/core
 CPU(s) orderable: 32,64,96,128,160,192,224,256 cores
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (32x8 GB) DDR3 1066 MHz
 Disk Subsystem: 5x146.8 GB Raid0 SAS SFF 15K RPM
 Other Hardware: None

Software

Operating System: IBM AIX V7.1
 Compiler: IBM XL C/C++ for AIX, V11.1
 Version: 11.01.0000.0002
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1440

IBM Power 795 (4.0 GHz, 32 core)

SPECint_rate_base2006 = 1270

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1230	1020	1192	1050	1192	1050	128	1052	1190	1039	1200	1029	1220
401.bzip2	128	1260	981	1204	1030	1194	1030	128	1134	1090	1109	1110	1154	1070
403.gcc	128	944	1090	946	1090	933	1100	128	846	1220	860	1200	864	1190
429.mcf	128	632	1850	632	1850	633	1850	64	306	1910	302	1930	308	1890
445.gobmk	128	1020	1320	1022	1310	1026	1310	128	867	1550	860	1560	858	1570
456.hammer	128	967	1230	974	1230	976	1220	128	603	1980	605	1970	599	1990
458.sjeng	128	1232	1260	1233	1260	1234	1250	128	1065	1450	1064	1460	1070	1450
462.libquantum	128	1045	2540	1043	2540	1049	2530	64	510	2600	510	2600	510	2600
464.h264ref	128	1791	1580	1786	1590	1777	1590	128	1603	1770	1601	1770	1598	1770
471.omnetpp	128	1000	800	991	807	985	812	128	910	879	893	896	909	880
473.astar	128	856	1050	857	1050	855	1050	128	829	1080	825	1090	829	1080
483.xalancbmk	128	716	1230	717	1230	733	1200	128	634	1390	633	1400	636	1390

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

```

fdpr binary optimization tool used for 401.bzip2
with options -04 -sdp 9 -rtb -vrox -nodp -m power7
fdpr binary optimization tool used for 403.gcc 429.mcf 445.gobmk 458.sjeng
with options -03 -m power7
fdpr binary optimization tool used for 456.hammer
with options -03 -lu -1 -nodp -sdp 9 -m power7
fdpr binary optimization tool used for 462.libquantum
with options -04 -nodp -m power7
fdpr binary optimization tool used for 471.omnetpp
with options -04 -nodp -m power7 -vrox
fdpr binary optimization tool used for 473.astar
with options -04 -sdp 9 -vrox -dp -m power7

```

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

Environment variables set by runspec before the start of the run:

```

MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

```

All ulimits set to unlimited.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1440

IBM Power 795 (4.0 GHz, 32 core)

SPECint_rate_base2006 = 1270

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Operating System Notes (Continued)

12800 16M large pages defined with vmo command

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX

462.libquantum: -DSPEC_CPU_AIX

464.h264ref: -DSPEC_CPU_AIX -qchars=signed

483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage -qsimd -qvecnvol
-D_IIS_MACROS -qalias=noansi -qalloc -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -O5 -qlargepage -D_IIS_MACROS
-qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1440

IBM Power 795 (4.0 GHz, 32 core)

SPECint_rate_base2006 = 1270

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Peak Compiler Invocation (Continued)

C++ benchmarks:

/usr/vacpp/bin/xlc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O2 -qarch=auto -qtune=auto -D_ILS_MACROS
-qalias=noansi -blpdata -btextpsize:64K

401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvol -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -qalloca -blpdata -btextpsize:64K

429.mcf: Same as 401.bzip2

445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

456.hmmr: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign
-D_ILS_MACROS -blpdata -btextpsize:64K

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K

462.libquantum: -O5 -q64 -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1440

IBM Power 795 (4.0 GHz, 32 core)

SPECint_rate_base2006 = 1270

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

Peak Optimization Flags (Continued)

```
471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
             -qpdf2(pass 2) -O4 -D_ILS_MACROS -qalign=natural
             -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR
             -blpdata -btexpsize:64K
```

```
473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
             -qpdf2(pass 2) -O4 -qlargepage -D_ILS_MACROS -qinlglue
             -qalign=natural -blpdata -btexpsize:64K
```

```
483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
                 -qpdf2(pass 2) -O4 -qsimd -qvecnvol -qarch=pwr5
                 -qtune=pwr5 -qlargepage -D_ILS_MACROS -qinlglue
                 -D__IBM_FAST_VECTOR -blpdata -btexpsize:64K
```

Peak Other Flags

C benchmarks (except as noted below):

```
-qipa=noobject -qsuppress=1500-036
```

```
400.perlbench: -qsuppress=1500-036
```

```
403.gcc: -qsuppress=1500-036
```

```
462.libquantum: -qsuppress=1500-036
```

C++ benchmarks (except as noted below):

```
-qipa=noobject -qsuppress=1500-036
```

```
471.omnetpp: -qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100901.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 1440

IBM Power 795 (4.0 GHz, 32 core)

SPECint_rate_base2006 = 1270

CPU2006 license: 11

Test date: Aug-2010

Test sponsor: IBM Corporation

Hardware Availability: Sep-2010

Tested by: IBM Corporation

Software Availability: Sep-2010

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:06:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 31 August 2010.