



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 256**

**SPECfp\_rate\_base2006 = 248**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2010

Hardware Availability: Sep-2010

Software Availability: Dec-2009

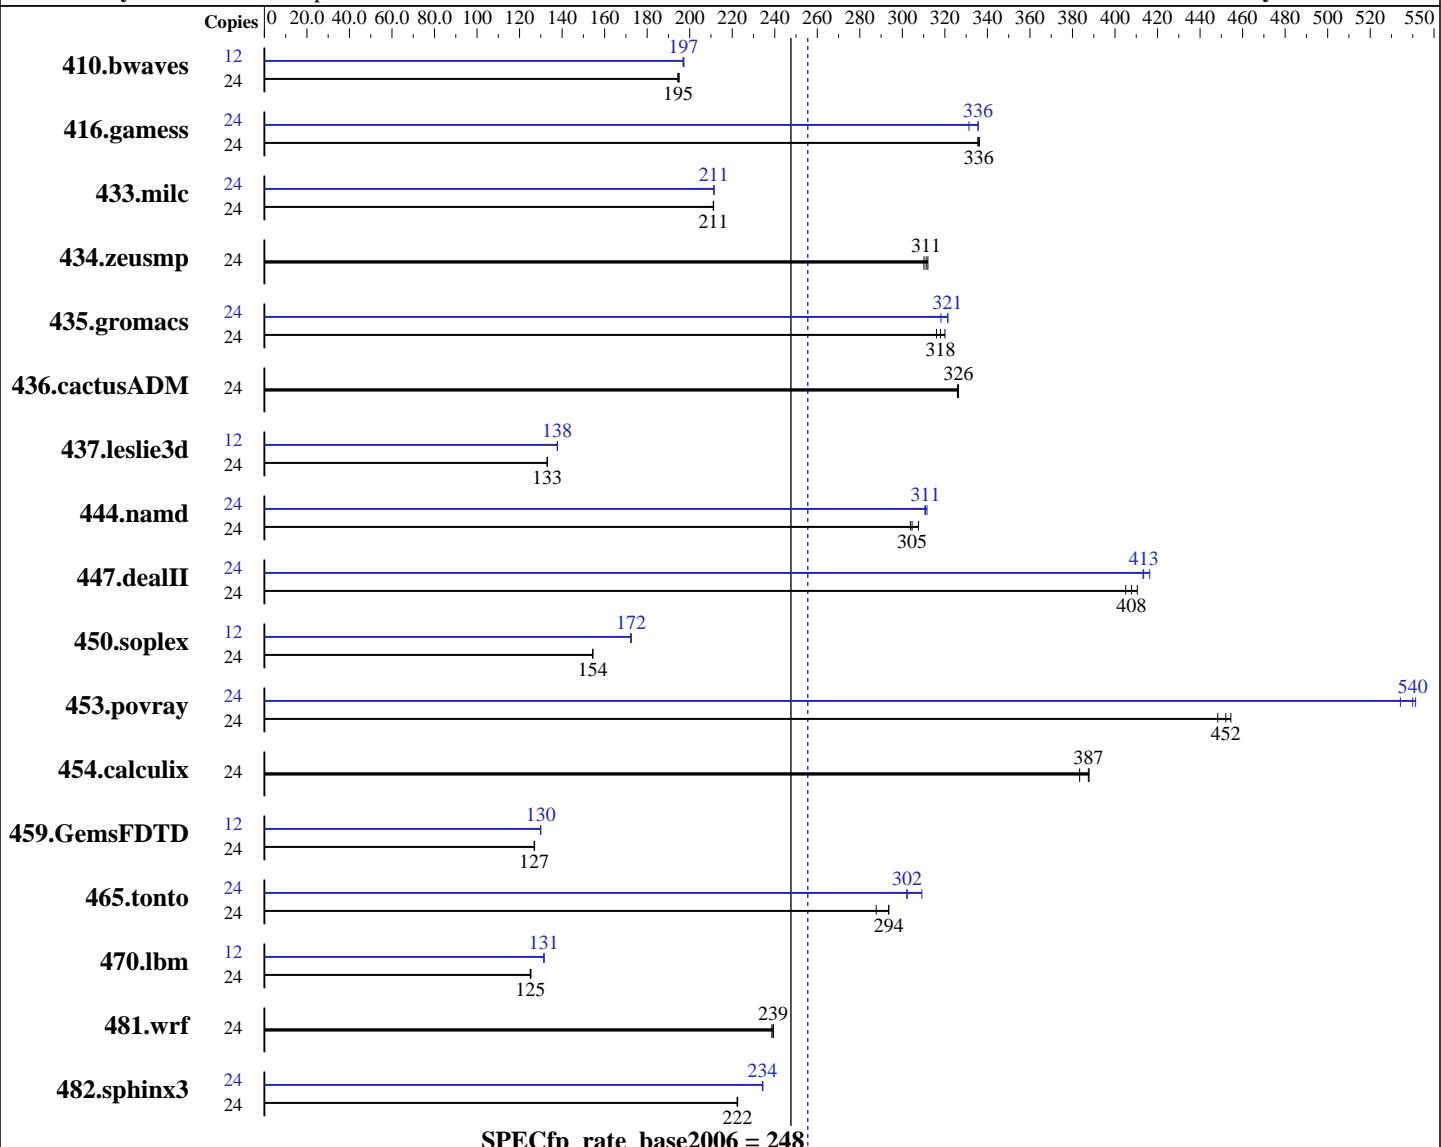

CPU Name: Intel Xeon X5680  
CPU Characteristics: Intel Turbo Boost Technology up to 3.60 GHz  
CPU MHz: 3333  
FPU: Integrated  
CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

### Hardware

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)

### Software

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 256**

**SPECfp\_rate\_base2006 = 248**

**CPU2006 license:** 9006

**Test date:** Sep-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2010

**Tested by:** NEC Corporation

**Software Availability:** Dec-2009

L3 Cache: 12 MB I+D on chip per chip  
Other Cache: None  
Memory: 96 GB (12 x 8 GB PC3L-10600R, 2 rank, CL9, ECC)  
Disk Subsystem: 1x160 GB SATA, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1672	195	<b>1676</b>	<b>195</b>	1678	194	12	828	197	827	197	<b>827</b>	<b>197</b>
416.gamess	24	1398	336	1401	335	<b>1399</b>	<b>336</b>	24	<b>1400</b>	<b>336</b>	1400	336	<b>1418</b>	<b>331</b>
433.milc	24	1043	211	1044	211	<b>1043</b>	<b>211</b>	24	1042	211	1042	211	<b>1042</b>	<b>211</b>
434.zeusmp	24	<b>702</b>	<b>311</b>	704	310	700	312	24	<b>702</b>	<b>311</b>	704	310	<b>700</b>	<b>312</b>
435.gromacs	24	535	320	<b>539</b>	<b>318</b>	542	316	24	<b>533</b>	<b>321</b>	533	321	<b>539</b>	<b>318</b>
436.cactusADM	24	880	326	<b>879</b>	<b>326</b>	879	326	24	880	326	<b>879</b>	<b>326</b>	<b>879</b>	<b>326</b>
437.leslie3d	24	1696	133	<b>1696</b>	<b>133</b>	1695	133	12	818	138	819	138	<b>819</b>	<b>138</b>
444.namd	24	626	308	<b>632</b>	<b>305</b>	634	304	24	620	311	<b>619</b>	<b>311</b>	618	312
447.dealII	24	669	410	678	405	<b>673</b>	<b>408</b>	24	659	416	665	413	<b>664</b>	<b>413</b>
450.soplex	24	1296	154	1296	154	<b>1296</b>	<b>154</b>	12	<b>581</b>	<b>172</b>	<b>580</b>	<b>172</b>	580	173
453.povray	24	<b>282</b>	<b>452</b>	281	454	285	448	24	236	541	239	534	<b>236</b>	<b>540</b>
454.calculix	24	511	388	517	383	<b>511</b>	<b>387</b>	24	511	388	517	383	<b>511</b>	<b>387</b>
459.GemsFDTD	24	<b>2006</b>	<b>127</b>	2007	127	2004	127	12	<b>980</b>	<b>130</b>	981	130	<b>980</b>	<b>130</b>
465.tonto	24	<b>804</b>	<b>294</b>	804	294	821	288	24	<b>764</b>	<b>309</b>	782	302	<b>781</b>	<b>302</b>
470.lbm	24	2631	125	<b>2635</b>	<b>125</b>	2638	125	12	<b>1254</b>	<b>132</b>	<b>1254</b>	<b>131</b>	1254	131
481.wrf	24	1123	239	<b>1121</b>	<b>239</b>	1120	239	24	<b>1123</b>	<b>239</b>	<b>1121</b>	<b>239</b>	1120	239
482.sphinx3	24	<b>2102</b>	<b>222</b>	2102	223	2105	222	24	<b>1995</b>	<b>234</b>	<b>1997</b>	<b>234</b>	1997	234

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
Performance/Watt: Traditional  
Server Class: Custom  
Data Reuse Optimization: Disabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 256**

**SPECfp\_rate\_base2006 = 248**

**CPU2006 license:** 9006

**Test date:** Sep-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2010

**Tested by:** NEC Corporation

**Software Availability:** Dec-2009

## Platform Notes (Continued)

Memory Voltage: Normal

## General Notes

The Express5800/R120b-1 and  
the Express5800/R120b-2 models are electronically equivalent.  
The results have been measured on the Express5800/R120b-1 model.

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
    433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
    444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
    465.tonto: -DSPEC\_CPU\_LP64  
    470.lbm: -DSPEC\_CPU\_LP64  
    481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 256**

**SPECfp\_rate\_base2006 = 248**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 256**

**SPECfp\_rate\_base2006 = 248**

**CPU2006 license:** 9006

**Test date:** Sep-2010

**Test sponsor:** NEC Corporation

**Hardware Availability:** Sep-2010

**Tested by:** NEC Corporation

**Software Availability:** Dec-2009

## Peak Portability Flags (Continued)

470.lbm: -DSPEC\_CPU\_LP64

481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -opt-prefetch
```

```
470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -opt-malloc-options=3 -ansi-alias -auto-ilp32
```

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

```
444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
           -fno-alias -auto-ilp32
```

```
447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll2 -ansi-alias -scalar-rep-
```

```
450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -opt-malloc-options=3
```

```
453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll4 -ansi-alias
```

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

```
416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
            -no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
            -unroll2 -Ob0 -ansi-alias -scalar-rep-
```

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/R120b-1  
(Intel Xeon X5680)

**SPECfp\_rate2006 = 256**

**SPECfp\_rate\_base2006 = 248**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2010

**Hardware Availability:** Sep-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

459.GemsFDTD: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll12 -Ob0

465.tonto: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll14 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xsse4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100929.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 12:55:19 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 28 September 2010.