



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 161

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

SPECint_rate_base2006 = 140

CPU2006 license: 55


Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

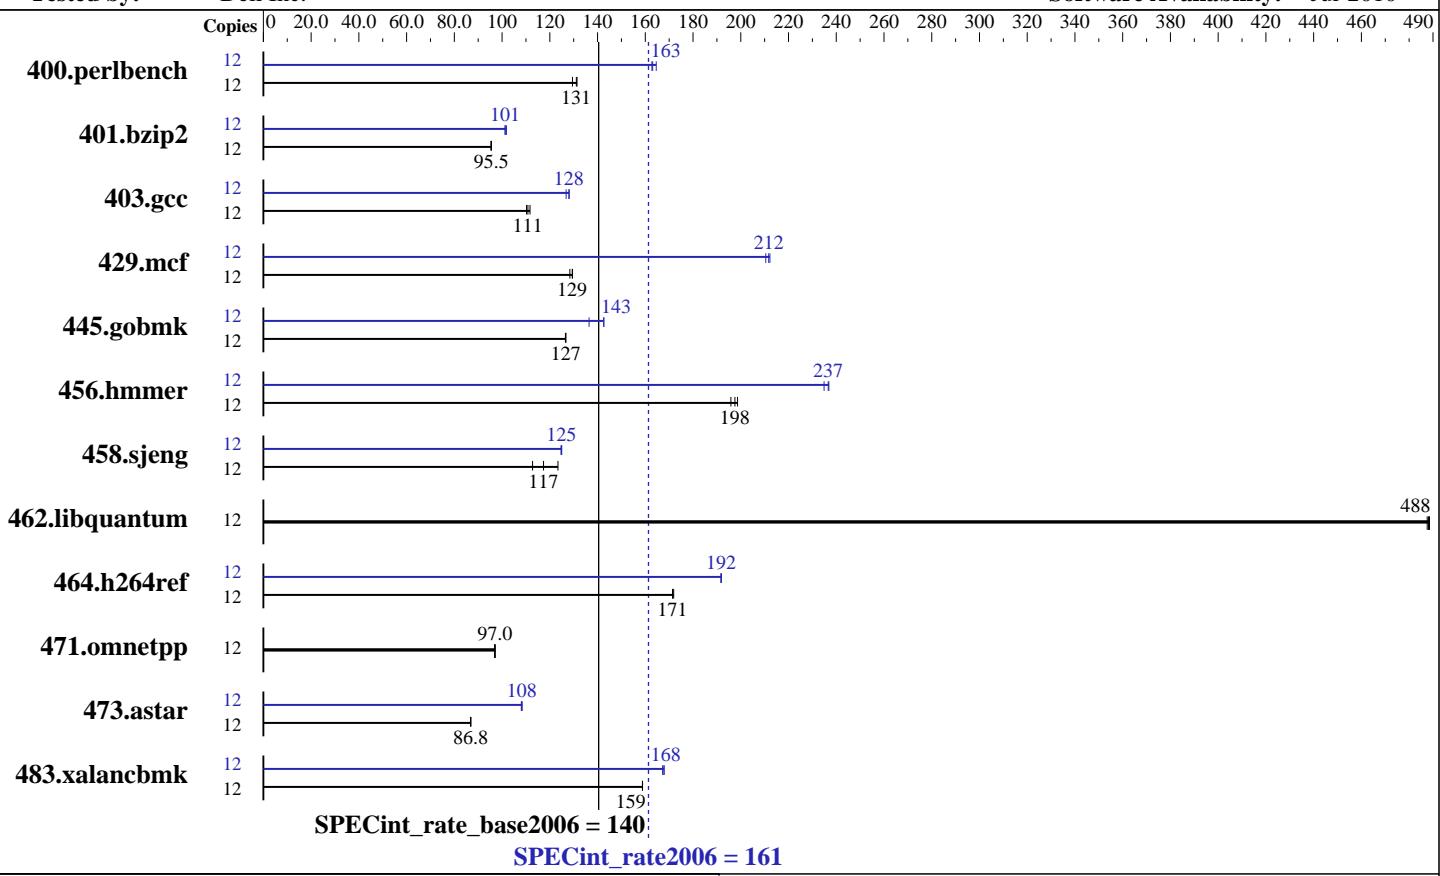

Hardware		Software	
CPU Name:	AMD Opteron 4162 EE	Operating System:	SUSE Linux Enterprise Server 11 (x86_64)
CPU Characteristics:		Compiler:	Kernel 2.6.27.19-5-default
CPU MHz:	1700	Auto Parallel:	x86 Open64 4.2.4 Compiler Suite (from AMD)
FPU:	Integrated	File System:	No
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip	System State:	ext3
CPU(s) orderable:	1,2 chips	Base Pointers:	Run level 3 (Full multiuser with network)
Primary Cache:	64 KB I + 64 KB D on chip per core	Peak Pointers:	32/64-bit
Secondary Cache:	512 KB I+D on chip per core	Other Software:	SmartHeap 8.1 32-bit Library for Linux
L3 Cache:	6 MB I+D on chip per chip		
Other Cache:	None		
Memory:	32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)		
Disk Subsystem:	1 x 146 GB 10000 RPM SAS		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

SPECint_rate2006 = 161

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	892	131	894	131	905	129	12	720	163	719	163	712	165
401.bzip2	12	1214	95.4	1212	95.6	1213	95.5	12	1143	101	1137	102	1143	101
403.gcc	12	872	111	865	112	876	110	12	754	128	762	127	755	128
429.mcf	12	852	128	846	129	845	130	12	517	212	516	212	520	210
445.gobmk	12	994	127	993	127	995	127	12	883	143	883	143	923	136
456.hammer	12	567	198	564	199	572	196	12	473	237	477	235	473	237
458.sjeng	12	1287	113	1237	117	1176	123	12	1163	125	1164	125	1162	125
462.libquantum	12	509	489	509	488	510	488	12	509	489	509	488	510	488
464.h264ref	12	1549	171	1545	172	1549	171	12	1385	192	1384	192	1385	192
471.omnetpp	12	773	97.0	772	97.1	774	96.9	12	773	97.0	772	97.1	774	96.9
473.astar	12	971	86.8	969	87.0	971	86.8	12	778	108	777	108	780	108
483.xalancbmk	12	521	159	521	159	521	159	12	493	168	493	168	495	167

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=5400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"
LD_LIBRARY_PATH = "/root/cpu2006-1.1/amd1002-rate-libs-revC/64:/root/cpu2006-1.1/amd1002-rate-libs-revC/32"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
<http://developer.amd.com/cpu/open64>

Binaries were compiled on SLES10 SP2 with binutils 2.18



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

SPECint_rate2006 = 161

SPECint_rate_base2006 = 140

Test date: Jul-2010

Hardware Availability: Jul-2010

Software Availability: Jul-2010

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64  
401.bzip2: -DSPEC_CPU_LP64  
403.gcc: -DSPEC_CPU_LP64  
429.mcf: -DSPEC_CPU_LP64  
445.gobmk: -DSPEC_CPU_LP64  
456.hmmr: -DSPEC_CPU_LP64  
458.sjeng: -DSPEC_CPU_LP64  
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX  
464.h264ref: -DSPEC_CPU_LP64  
483.xalancbmk: -DSPEC_CPU_LINUX
```

Base Optimization Flags

C benchmarks:
-march=barcelona -mso -Ofast -CG:local_sched_alg=1
-INLINE:aggressive=on -IPA:plimit=8000 -IPA:small_pu=100
-HP:bdt=2m:heap=2m

C++ benchmarks:
-march=barcelona -mso -Ofast -m32 -INLINE:aggressive=on
-CG:cmp_peep=on -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

SPECint_rate2006 = 161

SPECint_rate_base2006 = 140

Test date: Jul-2010

Hardware Availability: Jul-2010

Software Availability: Jul-2010

Peak Portability Flags (Continued)

```

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmr: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

Peak Optimization Flags

C benchmarks:

```

400.perlbench: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
               -CG:local_sched_alg=1 -CG:unroll_fb_req=on
               -HP:bdt=2m:heap=2m

401.bzip2: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -O3 -OPT:alias=disjoint
               -OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m

403.gcc: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
               -LNO:prefetch_ahead=10 -CG:cmp_peep=on -m32
               -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200

429.mcf: -march=barcelona -mso -O3 -ipa -INLINE:aggressive=on
               -CG:gcm=off -GRA:prioritize_by_density=on -m32
               -HP:bdt=2m:heap=2m

445.gobmk: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -O3 -OPT:alias=restrict
               -OPT:unroll_times_max=8 -OPT:unroll_size=256
               -OPT:unroll_level=2 -OPT:keep_ext=on -ipa -IPA:plimit=750
               -IPA:min_hotness=300 -IPA:pu_reorder=1 -LNO:prefetch=1
               -LNO:ignore_feedback=off -CG:p2align=on
               -CG:unroll_fb_req=on -HP:bdt=2m:heap=2m

456.hmmr: -march=barcelona -mso -fb_create fbdata(pass 1)
               -fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=0
               -OPT:alias=disjoint -OPT:unroll_times_max=8
               -OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
               -CG:local_sched_alg=1 -CG:cflow=0
               -CG:push_pop_int_saved_regs=off -CG:cmp_peep=on
               -HP:bdt=2m:heap=2m

```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R515 (AMD Opteron 4162 EE, 1.70 GHz)

SPECint_rate2006 = 161

CPU2006 license: 55

Test date: Jul-2010

Test sponsor: Dell Inc.

Hardware Availability: Jul-2010

Tested by: Dell Inc.

Software Availability: Jul-2010

Peak Optimization Flags (Continued)

```
458.sjeng: -march=barcelona -mso -fb_create fbdata(pass 1)
           -fb_opt fbdata(pass 2) -O3 -ipa -LNO:ignore_feedback=off
           -LNO:full_unroll=10 -LNO:fusion=0 -LNO:fission=2
           -IPA:pu_reorder=2 -CG:ptr_load_use=0
           -OPT:unroll_times_max=8 -INLINE:aggressive=on
```

```
462.libquantum: basepeak = yes
```

```
464.h264ref: -march=barcelona -mso -fb_create fbdata(pass 1)
              -fb_opt fbdata(pass 2) -O3 -IPA:plimit=20000
              -OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr_load_use=0
              -CG:push_pop_int_saved_regs=off
```

C++ benchmarks:

```
471.omnetpp: basepeak = yes
```

```
473.astar: -march=barcelona -mso -fb_create fbdata(pass 1)
            -fb_opt fbdata(pass 2) -Ofast -TENV:frame_pointer=off
            -WOPT;if_conv=0 -GRA:optimize_boundary=on
            -OPT:alias=disjoint -INLINE:aggressive=on
            -IPA:small_pu=3000 -IPA:plimit=3000 -m32
            -HP:bdt=2m:heap=2m
```

```
483.xalancbmk: -march=barcelona -mso -Ofast -INLINE:aggressive=on -m32
                -CG:cmp_peep=on -GRA:unspill=on -TENV:frame_pointer=off
                -fno-emit-exceptions
                -L/root/work/libraries/SmartHeap-8.1/lib -lsmartheap
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.html>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-424-flags-rate-revC.20100901.xml>
<http://www.spec.org/cpu2006/flags/amd-platform-rate-revC.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 14:42:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 October 2010.