



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp®2006 = 29.0

PRIMERGY BX620 S6, Intel Xeon E5507, 2.26 GHz

SPECfp\_base2006 = 27.2

CPU2006 license: 19


Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

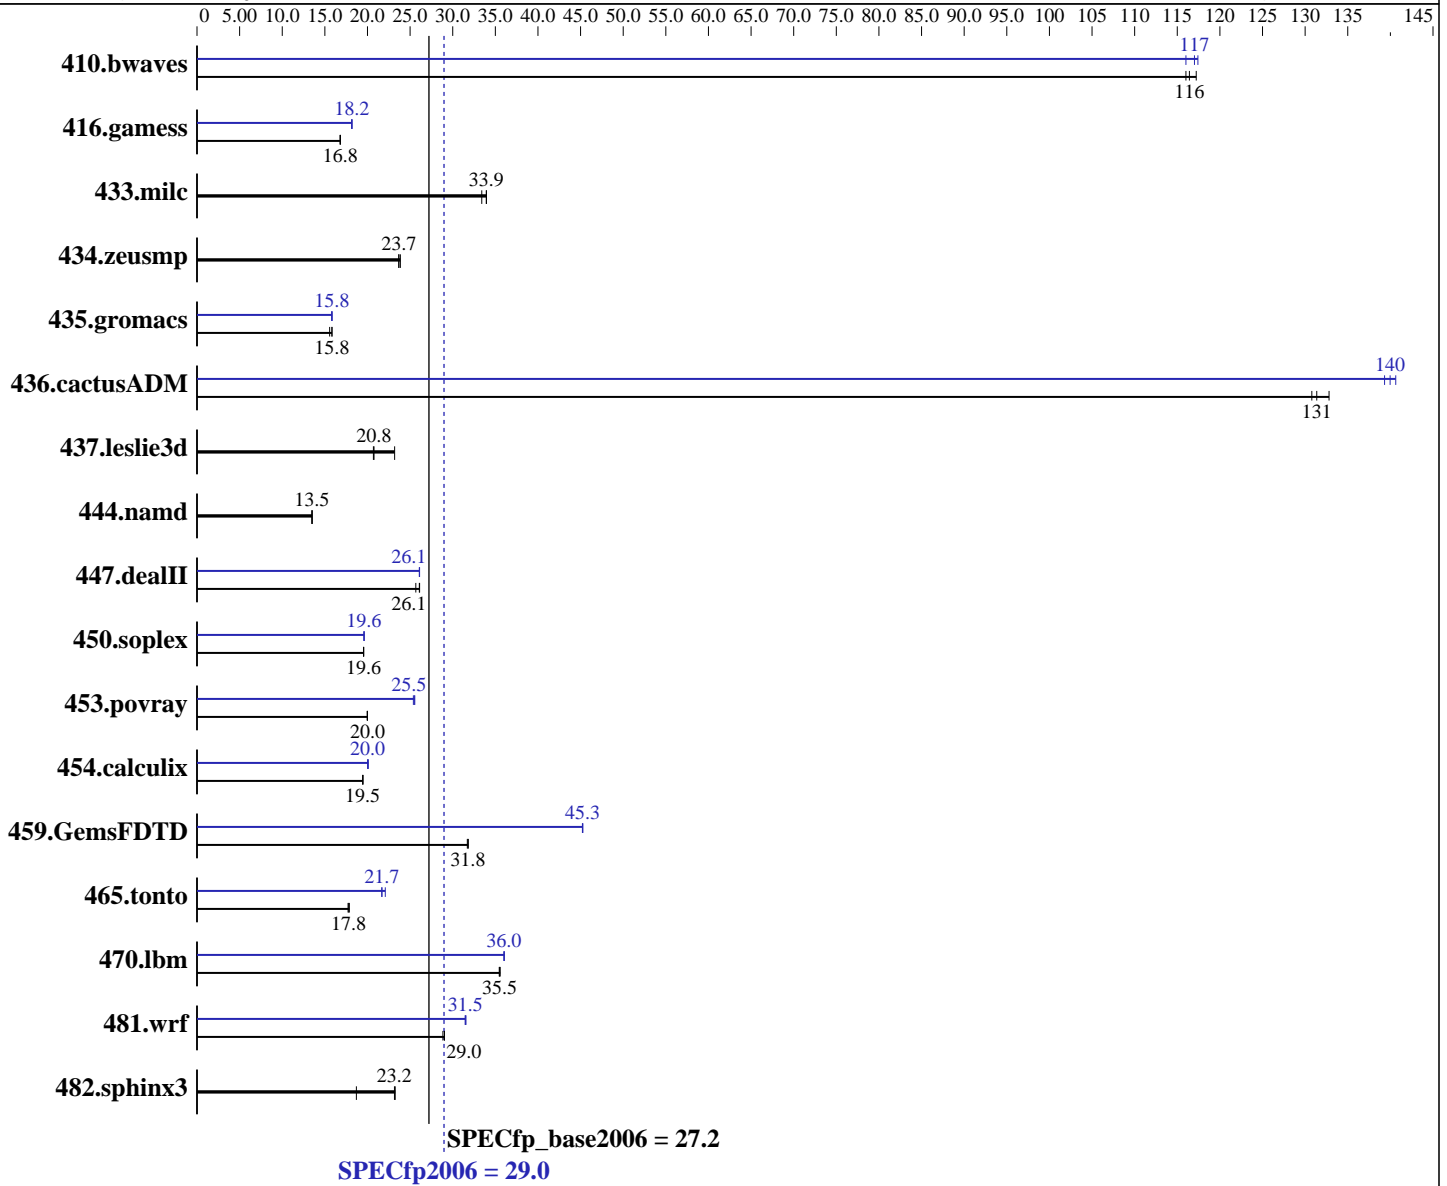

### Hardware

CPU Name: Intel Xeon E5507  
 CPU Characteristics:  
 CPU MHz: 2267  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64) with SP1, Kernel 2.6.32.12-0.7-default  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp2006 = **29.0**

PRIMERGY BX620 S6, Intel Xeon E5507, 2.26 GHz

SPECfp\_base2006 = **27.2**

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-10600R, ECC, running at 800 MHz and CL6)  
 Disk Subsystem: 1 x SAS, 300 GB, 10000 RPM  
 Other Hardware: --

Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b><u>117</u></b>	<b><u>116</u></b>	116	117	117	116	116	117	<b><u>116</u></b>	<b><u>117</u></b>	117	116
416.gamess	<b><u>1165</u></b>	<b><u>16.8</u></b>	1166	16.8	1164	16.8	1079	18.1	<b><u>1077</u></b>	<b><u>18.2</u></b>	1077	18.2
433.milc	270	34.0	<b><u>270</u></b>	<b><u>33.9</u></b>	275	33.4	<b><u>270</u></b>	34.0	<b><u>270</u></b>	<b><u>33.9</u></b>	275	33.4
434.zeusmp	<b><u>384</u></b>	<b><u>23.7</u></b>	384	23.7	381	23.9	<b><u>384</u></b>	<b><u>23.7</u></b>	384	23.7	381	23.9
435.gromacs	<b><u>451</u></b>	<b><u>15.8</u></b>	451	15.8	459	15.6	451	15.8	452	15.8	<b><u>451</u></b>	<b><u>15.8</u></b>
436.cactusADM	<b><u>91.0</u></b>	<b><u>131</u></b>	91.4	131	90.0	133	85.8	139	85.0	141	<b><u>85.4</u></b>	<b><u>140</u></b>
437.leslie3d	454	20.7	<b><u>453</u></b>	<b><u>20.8</u></b>	405	23.2	454	20.7	<b><u>453</u></b>	<b><u>20.8</u></b>	405	23.2
444.namd	594	13.5	<b><u>594</u></b>	<b><u>13.5</u></b>	594	13.5	594	13.5	<b><u>594</u></b>	<b><u>13.5</u></b>	594	13.5
447.dealII	438	26.1	<b><u>439</u></b>	<b><u>26.1</u></b>	446	25.7	438	26.1	<b><u>438</u></b>	<b><u>26.1</u></b>	439	26.1
450.soplex	427	19.6	<b><u>427</u></b>	<b><u>19.6</u></b>	427	19.5	<b><u>425</u></b>	<b><u>19.6</u></b>	426	19.6	425	19.6
453.povray	266	20.0	<b><u>266</u></b>	<b><u>20.0</u></b>	267	20.0	208	25.5	210	25.4	<b><u>209</u></b>	<b><u>25.5</u></b>
454.calculix	424	19.5	424	19.4	<b><u>424</u></b>	<b><u>19.5</u></b>	<b><u>412</u></b>	<b><u>20.0</u></b>	411	20.1	412	20.0
459.GemsFDTD	335	31.7	<b><u>334</u></b>	<b><u>31.8</u></b>	334	31.8	<b><u>234</u></b>	<b><u>45.3</u></b>	235	45.2	234	45.3
465.tonto	551	17.9	555	17.7	<b><u>553</u></b>	<b><u>17.8</u></b>	<b><u>453</u></b>	<b><u>21.7</u></b>	445	22.1	454	21.7
470.lbm	386	35.6	388	35.5	<b><u>387</u></b>	<b><u>35.5</u></b>	382	36.0	<b><u>381</u></b>	<b><u>36.0</u></b>	381	36.0
481.wrf	387	28.8	<b><u>385</u></b>	<b><u>29.0</u></b>	385	29.0	354	31.6	355	31.5	<b><u>355</u></b>	<b><u>31.5</u></b>
482.sphinx3	1042	18.7	838	23.3	<b><u>841</u></b>	<b><u>23.2</u></b>	1042	18.7	838	23.3	<b><u>841</u></b>	<b><u>23.2</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## General Notes

OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M  
 For information about Fujitsu please visit: <http://www.fujitsu.com>  
 Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 29.0**

PRIMERGY BX620 S6, Intel Xeon E5507, 2.26 GHz

**SPECfp\_base2006 = 27.2**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Sep-2010  
Hardware Availability: Jul-2010  
Software Availability: Jan-2010

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 29.0**

PRIMERGY BX620 S6, Intel Xeon E5507, 2.26 GHz

**SPECfp\_base2006 = 27.2**

CPU2006 license: 19  
Test sponsor: Fujitsu  
Tested by: Fujitsu

Test date: Sep-2010  
Hardware Availability: Jul-2010  
Software Availability: Jan-2010

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp2006 = 29.0**

PRIMERGY BX620 S6, Intel Xeon E5507, 2.26 GHz

**SPECfp\_base2006 = 27.2**

CPU2006 license: 19

Test date: Sep-2010

Test sponsor: Fujitsu

Hardware Availability: Jul-2010

Tested by: Fujitsu

Software Availability: Jan-2010

## Peak Optimization Flags (Continued)

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100708.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp2006 = 29.0

PRIMERGY BX620 S6, Intel Xeon E5507, 2.26 GHz

SPECfp\_base2006 = 27.2

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Sep-2010

Hardware Availability: Jul-2010

Software Availability: Jan-2010

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 14:15:46 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 October 2010.